

04/17/00
JC571 U.S. PTO

04-18-00

A

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of James Xanthos, Mark McDowell, Graham Stead,
Joseph Khalil, David Helinski, and Joseph Kitchell

Serial No.: Not yet assigned

Group Art Unit:

Filed: Herewith

Examiner:

For: METHOD AND SYSTEM OF MEASURING DATA QUALITY OF SERVICE IN A
WIRELESS NETWORK USING MULTIPLE REMOTE UNITS AND A BACK END
PROCESSOR

Assistant Commissioner for Patents
Box PATENT APPLICATION
Washington, D.C. 20231


Dear Sir:

Enclosed please find the following:

1. Specification, abstract and claims (12 independent, 131 dependent, 143 total) (85 pages);
2. Informal drawings (35 figures, 35 sheets);
3. Declaration and Power of Attorney;
4. Assignment with Recordation Sheet;
5. Verified Statement Claiming Small Entity Status - Independent Inventor;
6. Verified Statement Claiming Small Entity Status - Small Business Concern;
7. Two checks, one in the amount of \$1,834.00 (\$345.00 for filing the application, \$40.00 for filing the assignment, \$351.00 for excess independent claims, and \$1,098.00 for filing excess claims), and one in the amount of \$9.00 (for excess claims); and,
8. Certificate of Express mailing.

The Commissioner is hereby authorized to charge any fee deficiency, or credit any overpayment, to Deposit Account No. 18-1579. The Commissioner is also authorized to charge Deposit Account No. 18-1579 for any future fees connected in any way to this application. Two copies of this letter are enclosed.

Respectfully submitted,



Kevin L. Pontius
Registration No. 37,512
Roberts Abokhair & Mardula, LLC
11800 Sunrise Valley Drive, Suite 1000
Reston, VA 20191-5302
(703) 391-2900

April 17, 2000

Atty. Docket No. 2506-005


JC675 U.S. PTO
09/550955

CERTIFICATE OF EXPRESS MAILING

Express Mail Mailing Label Number EL528296352US

Date of Deposit: April 17, 2000

I hereby certify that the patent application of James Xanthos, Mark McDowell, Graham Stead, Joseph Khalil, David Helinski, and Joseph Kitchell for a **METHOD AND SYSTEM FOR MEASURING DATA QUALITY OF SERVICE IN A WIRELESS NETWORK USING MULTIPLE REMOTE UNITS AND A BACK END PROCESSOR** including the specification, abstract, and claims (12 independent, 131 dependent, 143 total) (85 pages); informal drawings (35 figures, 35 sheets); declaration and power of attorney; an assignment together with a recordation cover sheet; Verified Statement Claiming Small Entity Status - Small Business Concern; Verified Statement Claiming Small Entity status - Independent Inventor; and two checks, one in the amount of \$1,834.00 (\$345.00 for filing the application, \$40.00 for filing the assignment, \$351.00 for excess independent claims, and \$1,098.00 for filing excess claims), and one in the amount of \$9.00 (for excess claims), are being deposited with the United States Postal Service for "Express Mail" service under 37 C.F.R. § 1.10 on the date indicated above and are addressed to the Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.



Kevin L. Pontius
Registration No. 37,512
Roberts Abokhair & Mardula, LLC
11800 Sunrise Valley Drive, Suite 1000
Reston, VA 20191-5302
(703) 391-2900

**VERIFIED STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(b))--INDEPENDENT INVENTOR**

Applicant or Patentee: James Xanthos, Mark McDowell, Graham Stead, Joseph Khalil, David Helinski, and Joseph Kitchell
 Serial or Patent No.: Not Yet Issued

Filed or Issued: Herewith

Title: **METHOD AND SYSTEM FOR MEASURING DATA QUALITY OF SERVICE IN A WIRELESS NETWORK USING MULTIPLE REMOTE UNITS AND A BACK END PROCESSOR**

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees to the Patent and Trademark Office described in:

- ☒ the specification filed herewith with title as listed above.
☐ the application identified above.
☐ the patent identified above.

I have not assigned, granted, conveyed or licensed and am under no obligation under convey or law to assign, grant, convey or license, any rights in the invention to any person who would not qualify as an independent inventor under 37 CFR 1.9(c) if that had made the invention, or to any concern which would not qualify as a business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(c).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- ☐ No such person, concern, or organization exists.
☒ Each such person, concern or organization is listed below.

Invertix, Inc.

Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 128(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made an information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Joseph Khalil
 NAME OF INVENTOR

Joseph Khalil
 Signature of inventor

4-13-00
 Date

David Helinski
 NAME OF INVENTOR

David Helinski
 Signature of inventor

4/13/00
 Date

Joseph Kitchell
 NAME OF INVENTOR

Joseph Kitchell
 Signature of inventor

13 April 2000
 Date

**VERIFIED STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(b))--INDEPENDENT INVENTOR**

Docket Number 2506-005

Applicant or Patentee: James Xanthos, Mark McDowell, Graham Stead, Joseph Khalil, David Helinski, and Joseph KitchellSerial or Patent No.: Not Yet IssuedFiled or Issued: HerewithTitle: **METHOD AND SYSTEM FOR MEASURING DATA QUALITY OF SERVICE IN A WIRELESS NETWORK USING MULTIPLE REMOTE UNITS AND A BACK END PROCESSOR**

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees to the Patent and Trademark Office described in:

☒ the specification filed herewith with title as listed above.

☐ the application identified above.

☐ the patent identified above.

I have not assigned, granted, conveyed or licensed and am under no obligation under convey or law to assign, grant, convey or license, any rights in the invention to any person who would not qualify as an independent inventor under 37 CFR 1.9(c) if that had made the invention, or to any concern which would not qualify as a business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(c).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

☐ No such person, concern, or organization exists.

☒ Each such person, concern or organization is listed below.


Invertix, Inc.

Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 128(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made an information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

James Xanthos
NAME OF INVENTOR


Signature of inventor

13 APR 2000
Date

Mark McDowell
NAME OF INVENTOR


Signature of inventor

04-13-00
Date

Graham Stead
NAME OF INVENTOR


Signature of inventor

Date 04/13/2000

**VERIFIED STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(c))--SMALL BUSINESS CONCERN**

Docket Number 2506-005

Applicant or Patentee: James Xanthos, Mark McDowell, Graham Stead, Joseph Khalil, David Helinski, and Joseph KitchellSerial or Patent No.: Not Yet IssuedFiled or Issued: HerewithTitle: **METHOD AND SYSTEM FOR MEASURING DATA QUALITY OF SERVICE IN A WIRELESS NETWORK USING MULTIPLE REMOTE UNITS AND A BACK END PROCESSOR**

I hereby declare that I am:

☐ the owner of the small business concern identified below:☒ an official of the small business concern empowered to act on behalf of the concern identified below:NAME OF SMALL BUSINESS CONCERN Invertix, Inc.ADDRESS OF SMALL BUSINESS CONCERN 7630 Little River Turnpike, Annandale, VA 22003

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.12, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees to the United States Patent and Trademark Office, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:

☒ the specification filed herewith with title as listed above.☐ the application identified above.☐ the patent identified above.

If the rights held by the above identified small business concern are not exclusive, each individual, concern or organization having rights in the invention must file separate verified statements averring to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization having any rights in the invention is listed below:

☒ no such person, concern or organization exists.☐ each such person, concern or organization is listed below.

Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27).

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlements to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate (37 CFR 1.289(b)).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING Mark McDowellTITLE OF PERSON IF OTHER THAN OWNER President and CEOADDRESS OF PERSON SIGNING 7630 Little River Turnpike, Annandale, VA 22003 *See 500*SIGNATURE Mark McDowell DATE 4-13-00

Method and System for Measuring Data Quality of Service in a Wireless Network using Multiple Remote Units and a Back End Processor

Inventors

James Xanthos
Mark McDowell
Graham Stead
Joseph Khalil
David Helinski
Joseph Kitchell

Related Application

This application claims priority from the provisional patent application no. 60/190,691 by James Xanthos, Mark McDowell, Graham Stead, Joseph Khalil, Dave Helinski, and Joseph Kitchell, filed on March 20, 2000. The provisional
5 patent application is incorporated herein by reference, in its entirety, for all purposes.

Background of the Invention

1. Field of the Invention.

10 The present invention relates generally to a method and system for measuring quality of service in a wireless network.

The present invention relates specifically to a method and system for measuring quality of service in a wireless network using multiple remote units and a back
15 end processor.

2. Description of the Related Art.

There are two major technical fields that have shown explosive growth over the
20 past few years: the first is wireless communications and the second is use of data services, particularly the Internet. These two technical fields both require a set of specialized tools in order to measure their quality of service. Interestingly, wireless communications and data services are beginning to converge.

Unfortunately, this convergence has not been accompanied by the development of appropriate specialized tools to measure data quality of service in the wireless network.

5 The growth of wireless communications has been astounding. Twenty years ago, there was virtually no use of wireless communications devices such as cellular phones. In contrast, the market penetration for wireless devices in the U.S. in 1999 was 32 percent. The current forecast is that 80 percent of the U.S. population will be wireless subscribers by 2008.

10

There are a variety of specialized tools that are used to measure quality of service over wireless networks. These include the following (just to name a few examples):

Ascom QVoice (including QVoice unattended);
15 Ericsson TEMS, RSAT-2000, Benchmarker, CellAD, and CeNA;
Nokia TOM;
Safco VoicePrint, DataPrint, and WalkAbout;
Comarco BaseLINE and Gen II;
Grayson Surveyor;
20 ZK CellTest DX136 and DXC;
Ameritec Swarm;
Neopoint Datalogger; and
Qualcomm QCTest Retriever and QCTest CAIT.

The general deficiency with these tools is that they were primarily developed to measure voice quality and/or RF parameters over the wireless system and not to measure data quality. Some of them have been modified to include some rudimentary data measurements; however, they are not optimized for performing wireless data measurements. In particular, they do not allow unattended measurement of wireless data from multiple remote units in a statistically significant manner with remote control from a back end processor.

10 The classical way of measuring voice quality of service and/or RF parameters in a wireless network involves sending out technicians to drive test the network.

The drive test includes placing the test instrument in a vehicle and running a test script that either generates or receives a voice test signal. The receiving end of the communication link uses a DSP containing a model of human hearing to

15 analyze the received voice sample and produce an associated quality score. In addition, some of the systems measure other system parameters such as SINAD, noise, distortion, received signal level, and call progress statistics.

Unfortunately, the classical method of measuring voice quality of service and/or

20 RF parameters does not function very well for measuring data quality of service. In order to make statistically significant measurements of data quality of service over a wireless network, it is necessary to make multiple measurements from multiple remote devices. Furthermore, a measurement of data quality is

inherently different from the other types of measurements due to the effects of latency and other effects that are specific to data.

Most of the existing measurement devices do not have this capability for a variety of reasons. The price of the test instruments range anywhere from \$5K to \$100K. This makes it price prohibitive to field a statistically significant fleet of remote devices. Thus, what is needed are remote devices designed for unattended operation that is remotely controlled by a back end processor in order to reduce manpower costs. Additionally, what is needed are remote devices that are optimized for performing measurements that are useful over wireless data networks, such as latency for Web page access or delay in SMS message delivery.

The growth of data services has been just as astounding as the growth rate for the wireless industry. The largest driving force behind the growth of data services has been the enormous growth of the Internet. For example, there were 130 Web sites in June 1993, 230,000 Web sites in June of 1996, and 10 million Web sites at the end of 1999.

There have been a variety of specialized tools developed to measure the data quality of service over the Internet.

U.S. Patent No. 6,006,260 to Barrick, Jr. et al. (assigned to Keynote Systems,

Inc) discloses a method for gathering latency experienced by a user over a network. The steps of the method include a user browser sending a GET command to retrieve an HTML page with an embedded Java script. The Java script starts a timer and generates a GET command to retrieve an HTML page.

- 5 When the page is received, the timer is stopped and the timer information along with cookie data stored on the browser machine is sent to a relay server that logs the information.

- 10 U.S. patent No. 5, 657,450 to Rao et al. teaches the provision of time estimates for long-running distal source access operations using an intermediate server close to the client workspace.

U.S. patent No. 5, 796, 952 to Owen et al. discloses a method for monitoring a user's time of page browsing.

15

U.S. patent No. 6, 012,096 to Link et al. teaches a method for monitoring client-to-client network latency for gaming applications. The method involves a ping, response, and response-response protocol.

- 20 Unfortunately, none of these patents teach a method which is appropriate for performing data quality of service measurements over a wireless network.

As previously mentioned, there is a tremendous convergence taking place that

combines the wireless network with data services. Dataquest estimates that the U. S. wireless data market (including phones, PDAs, laptops, and the like.) will grow from 3 million subscribers in 1999 to 36 million subscribers in 2003.

Ericsson is estimating that 1 billion wireless units will be in use worldwide by
5 2003 and that 40 percent (400 million) of these units will be employed by data users. Furthermore, Ericsson is predicting that 2003 will be the crossover year in which wireless Web access will exceed wired Web access.

As a further measure of the explosive growth of the convergence of the wireless
10 systems and the Internet, one can look at projections for the number of wireless portal subscribers. According to the Strategis Group, the number of wireless portals will increase from 300,000 in 2000, to 9.8 million in 2003, and finally to 24.8 million in 2006.

15 A variety of technical advancements have accelerated the convergence of Internet access over wireless devices. In 1997, three competing handset vendors (Nokia, Ericsson, and Motorola) and a small software company (Phone.com, formerly Unwired Planet) joined forces to create a standard way to transmit Internet data to wireless phones without occupying too much bandwidth.

20 The result of this collaboration was development of the wireless application protocol (WAP). One basic component of WAP was development of the WML (Wireless Markup Language, replacing the previous Phone.com Handheld Device Markup Language, HDML) that compresses Web content in comparison

to HTML. Additionally, the WAP forum developed standards for the use of microbrowsers in mobile devices.

Unfortunately, the development of wireless Web access technology has
5 significantly outpaced the development of wireless data measurements tools. Accordingly, there is a tremendous need for specific test tools to address the converging technologies of wireless systems and data communications.

Summary of the Invention

10

In order to meet this need, a measuring tool is provided for measuring data quality of service over the wireless network. This tool was designed from the ground up with a variety of specific attributes.

15

The present invention provides for a method and system for measuring data quality of service in a wireless network using multiple peripatetic (i.e. mobile) and/or stationary, unattended, position and performance instruments (PUPPIs) that are remotely controlled by a back end processor. According to some embodiments of the invention, the data service whose quality is measured
20 relates to wireless Internet access, e-commerce transactions, wireless messaging, or push technologies. According to other embodiments of the invention, the system includes an element that is located within the wireless network infrastructure, for example, at the WAP gateway to monitor the wireless

data protocol and to perform benchmarking measurements.

The remote unit is able to provide an appropriate statistical distribution for data measurements. The remote units can be peripatetic (i.e. mobile) so that they are
5 able to roam over a statistically significant geographical area, or stationary with pre-planned location at statistically significant points, or some combination of mobile and stationary.

Furthermore, the system includes multiple remote units that are unattended and
10 are remotely controlled by a back end processor. This allows for a large quantity of measurements to be taken in a fully automated manner.

Additionally, each of the remote units provides position information for each measurement as well as performance information that is related to wireless data.
15 More specifically, the performance information may be related to wireless Internet access, e-commerce transactions, or wireless messaging using either push or pull technologies.

For example, one of the most critical measurements for the wireless Internet user
20 is a measurement of the latency, i.e. the amount of time it takes to receive a response after a GET command is sent. In the case of wireless messaging, the latency measurement includes the amount of time required to receive information after it is sent from the source.

In addition, it is useful to perform measurements which divide the network into a wireless and wired portion and that provide separate measurements for each portion. Accordingly, the system may include an element that is located within
5 the wireless network infrastructure, for example at the WAP gateway, to monitor the wireless data protocol and to perform benchmarking measurements.

Accordingly, an object of the present invention is to provide a method and system for measuring data quality of service in a wireless network using multiple remote
10 units and a back end processor.

A further object of the invention is to perform these measurements on a variety of different types of traffic wireless networks, such as iDEN, CDMA, TDMA, and GSM, for example.
15

Another objective of the invention is to perform these measurements during a variety of different types of communications such as circuit switched calls, packet data calls, SMS messages, wireless internet access, wireless internet transactions (including e-commerce), and during the reception of push data (i.e.
20 data which is delivered using push technology).

A further objective of the invention is to collect a variety of different types of measurements such as latency measurements, reliability (e.g. BER/FER), layer 3

network information, RF information, call connection information, and the like.

Another objective of the invention is to use control links that are either wired or wireless.

5

A further objective of the invention is to use remote units that are either mobile, stationary, or some combination of mobile and stationary so that they provide statistically significant measurements.

10 Another object of the invention is to provide a back end which allows user access through the Internet, allows for post-processing of the received data, allows for scheduling collection missions based on available resources, and allows for generation of test traffic.

15 An additional object of the invention is to provide a remote unit that allows for storage and pre-processing of the measured data, battery backup, and an RF scanner.

Advantages of the current invention include the ability to collect statistically
20 significant data in an extremely cost effective and easy to use manner.

Brief Description of the Drawings

FIGS. 1a-g show a generic communication network with a variety of wireless communication paths connected to the Internet

FIG. 1a shows the communication path for the traffic data in a standard wired Internet measurement system.

5 FIG. 1b shows the communication path for the traffic data during a circuit switched data connection in accordance with an embodiment of the invention.

FIG. 1c shows the communication path for the traffic data during a packet switched data connection in accordance with an embodiment of the invention.

FIG. 1d shows the communication path for the traffic data during an SMS

10 message transmission in accordance with an embodiment of the invention.

FIG. 1e shows the communication path for the traffic data during a WAP data connection in accordance with an embodiment of the invention.

FIG. 1f shows the communication path for the traffic data during a WAP data connection in accordance with a further embodiment of the invention.

15 FIG. 1g shows the communication path for the traffic data during a WAP data connection, including a WAP monitoring processor, in accordance with a further embodiment of the invention.

FIG. 1h shows the communication path for the control link in accordance with an embodiment of the invention.

20

FIG. 2a shows the system architecture in accordance with one embodiment of the invention.

FIG. 2b shows the system architecture in accordance with a further embodiment

of the invention.

FIG. 2c shows the system architecture in accordance with another embodiment of the invention.

FIG. 2d shows the system architecture in accordance with a further embodiment
5 of the invention.

FIG. 2e shows the system architecture in accordance with another embodiment of the invention.

FIGS. 3a through 3d show a variety of basic architectures for remote units
10 according to various embodiments of the invention.

FIG. 3a shows the basic architecture for the remote unit in accordance with one embodiment of the invention.

FIG. 3b shows another architecture for the remote unit with separate control link
modem and traffic modem according to an alternate embodiment of the
15 invention.

FIG. 3c shows another architecture for the remote unit with separate control link
modem and multiple traffic modems according to another alternate embodiment
of the invention.

FIG. 3d shows a further architecture for the remote units that include multiple
20 peripherals in accordance with one embodiment of the invention.

FIGS. 4a through 4d show a variety of alternate implementations for the remote
unit in accordance with one embodiment of the invention.

FIG. 4a shows a hardware implementation of the remote unit using either a laptop or handheld unit in accordance with one embodiment of the invention.

FIG. 4b shows a hardware implementation of the remote units using a single board computer (SBC) in accordance with one embodiment of the invention.

5 FIG. 4c shows the organization of the software-defined radio in accordance with an embodiment of the invention.

FIG. 4d shows the organization of the software in the remote unit in accordance with an embodiment of the invention.

10 FIG. 5a shows the architecture of the back end processor in accordance with one embodiment of the invention.

FIG. 5b shows the architecture of the back end processor in accordance with an alternate embodiment of the invention.

15 FIG. 5c shows the architecture for the portal in accordance with one embodiment of the invention.

FIG. 6a shows examples of some of the fields in the remote unit originated packets (both data and signaling) in accordance with one embodiment of the invention.

20 FIG. 6b shows examples of some of the fields in the back end processor originated packets (both data and signaling) in accordance with one embodiment of the invention.

FIG. 7a shows a method for measuring data quality of service in a wireless network in accordance with one embodiment of the invention.

FIG. 7b shows a method for measuring data quality of service in a wireless network, including at least one step related to the wireless network infrastructure,
5 in accordance with an alternate embodiment of the invention.

FIG. 7c shows a method for measuring data quality of service in a wireless network, including at least one additional order independent step, in accordance with another embodiment of the invention.

10 FIG. 8a shows a bar graph output of download times from different portals in accordance with an embodiment of the invention.

FIG. 8b shows a bar graph output of download times across different wireless networks in accordance with an embodiment of the invention.

FIG. 8c shows a bar graph output of call completion percentage across different
15 wireless networks in accordance with an embodiment of the invention.

FIG. 8d shows a trending graph output of call completion percentage across different wireless networks in accordance with an embodiment of the invention.

FIG. 8e shows a bar graph output of average download times with a breakdown of the network latency at the WAP gateway in accordance with an embodiment of
20 the invention.

FIG. 8f shows a pie chart of error statistics for wireless access of Yahoo in accordance with an embodiment of the invention.

Detailed Description of the Invention

OVERVIEW

In order to understand the present invention, it is helpful to compare the communication path of current data measurements tools with the communication path in accordance with several embodiments of the invention. FIGS. 1a-g show a generic communication network with a variety of wireless communication paths connected to the Internet. It is well known to those of ordinary skill in the art that these figures illustrate a generic network that is used for illustrative purposes.

For example, in some cellular networks there is a base station controller connected to multiple base stations between their connections to the MSC. As another example, the WAP gateway, packet data gateway, and PSTN connection may be replaced in some wireless networks by a single device that is directly connected to the MSC.

FIG. 1a shows the communication path (heavy broken line) for the traffic data in a standard wired Internet measurement system. The traffic data flows between the user machine **124** over the Internet **122** to a standard application server **126** that will generally be serving an HTML page.

FIG. 1b shows the communication path (heavy broken line) for the traffic data during a circuit switched data connection in accordance with an embodiment of the invention. The traffic data passes from the remote unit **102-1** to the base station **106**, MSC **108**, PSTN **110**, ISP **112**, Internet **122**, and to a standard

application server **126**. The standard application server **126** may be serving an HTML page, for example.

FIG. 1c shows the communication path (heavy broken line) for the traffic data during a packet switched data connection in accordance with an embodiment of the invention. The traffic data passes from the remote unit **102-1** to the base station **106**, MSC **108**, operator backbone **114**, packet data gateway **118**, Internet **122**, and standard application server **126**. For example, the standard application server **126** may be serving an HTML page.

FIG. 1d shows the communication path (heavy broken line) for the traffic data during an SMS message transmission in accordance with an embodiment of the invention. If the SMS message is being delivered to the remote unit **102-1**, the traffic data passes from a standard application server **126** to the Internet **122**, SMSC **116**, operator backbone **114**, MSC **108**, base station **106**, and remote unit **102-1**.

FIG. 1e shows the communication path (heavy broken line) for the traffic data during a WAP data connection in accordance with an embodiment of the invention. If the remote unit **102-1** is accessing a WAP server **128**, the traffic data passes from the remote unit **102-1** to a base station **106**, MSC **108**, operator backbone **114**, WAP gateway **120**, Internet **122**, and WAP server **128**. For example, the traffic data path shown in FIG. 1e allows for latency

measurements for wireless Web page access or e-commerce transactions.

It is important to note that the term WAP is being used generically to refer to any wireless Internet protocol, including HDML and any future wireless Internet

5 protocols that may be developed. The following examples are provided of some competing technologies that for the purposes of this patent will be referred to generically as WAP. For example, the Web content can be delivered as text messaging or as an SMS message (as proposed by Xypoint or GoSMS) so that it is compatible with existing cellular phones. Alternatively, the Web content can be
10 delivered as existing HTML Internet content for wireless devices as proposed by Spyglass' Prism technology or Japan's iMode. As a further example, the content can be processed through a template model that reads existing HTML content and fits the data to a template optimized for various types of wireless phones such as the system proposed by Everypath.com. As another example, the data
15 content can be delivered to a Palm Pilot or other PDA or handheld device that uses a proprietary protocol.

FIG. 1f shows the communication path (heavy broken line) for the traffic data during a WAP data connection in accordance with a further embodiment of the
20 invention. If the remote unit **102-1** is accessing the benchmark WAP server **130**, the traffic data passes from the remote units **102-1** to a base station **106**, MSC **108**, operator backbone **114**, WAP gateway **120**, and to the benchmark WAP server **130**. This configuration allows latency measurements without including

the uncertainties of the latency through the Internet **122** itself. In other words, the configuration in FIG. 1f allows measurements of the latency due to the wireless network itself with no contribution from the Internet **122**.

5 FIG. 1g shows the communication path (heavy broken line) for the traffic data during a WAP data connection, including a WAP monitoring processor **132**, in accordance with a further embodiment of the invention. The WAP monitoring processor **132** may be implemented as monitoring software installed and running on the WAP Gateway **120** or as software installed on a separate machine
10 attached to the WAP Gateway **120**. The software would monitor traffic through the WAP Gateway **120** and provide metrics such as throughput, latency and lost packet information. This configuration would allow the wireless network and the Internet **122** itself to be analyzed and monitored separately, thus providing performance information for each. Furthermore, the WAP Monitoring Processor
15 **132** would be able to collect protocol information directly from the WAP Gateway **120** that may not be available to the multiple remote units (**102-1** through **102-N**).

The monitoring software may run as a separate application on the WAP Gateway **120**, or may be embedded into the WAP Gateway software itself and run as part
20 of the entire gateway application. The monitoring software would have a mechanism for collecting metrics and passing that information to the back end processor through the internet, wireless network, or through some other means.

The monitoring software may temporarily store results locally, and perform some pre-processing on the data prior to forwarding it to the back end processor.

FIG. 1h shows the communication path for the control link in accordance with an embodiment of the invention. The control link is used to remotely control the remote units **140, 142, 144, 146** from the back end processor **148**. Specifically, the process in the back end processor **148** that communicates with the remote units **140, 142, 144, 146** is the fleet management process, which will be discussed in detail later.

The remote units can be either mobile **140, 142, 144** or stationary **146**. The mobile units **140, 142, 144** can be mounted in a variety of vehicles such as taxis, police cars, buses, postal vehicles, delivery vehicles, fleet vehicles, just to give a few examples. The stationary remote units **146** can be mounted in any area in which the public congregates and uses wireless devices. This includes airports, bus stations, and train stations just to provide a few examples.

A variety of communication technologies are available to implement the control link. The control link can be implemented as data running over any of the current wireless networks such as CDMA, iDEN, TDMA, or GSM just to name a few examples. Additionally, the control link can be implemented over the AMPS network using CDPD for example. Alternatively, the control link can be implemented using a two-way data system such as ARDIS, MOBITEX, SKYTEL,

and the like.

SYSTEM ARCHITECTURE

5 FIG. 2a shows the system architecture in accordance with one embodiment of the invention. As previously described, the invention comprises multiple remote units (**202-1 – 202-N**) that may be either mobile or stationary. Each remote unit may include a location unit (**202a-1 – 202a-N**) that allows the remote unit to accurately determine its location. Furthermore, each remote unit includes a
10 communications link (**202b-1 – 202b-N**) that provides for both the control link and the traffic data. The communications link **202b-1** communicates over a communication network **210** that passes the information to a communication server **212** that connects to a data network **220**. The data network **220** can be a public data network, such as the Internet, or a private data network. A back end
15 processor **224** is connected to the data network **220** for handling control link information, both commands and responses, and traffic data. In addition, the customers **222** are also connected to the data network so that they can access the back end processor **224**.

20 FIG. 2b shows the system architecture in accordance with a further embodiment of the invention. The system in FIG. 2b differs from the system shown in FIG. 2a in that the control link network and the traffic data network are two separate communication networks. Each remote unit (e.g., **202-1**) may include a location

unit **202a-1** that allows the remote unit **202-1** to accurately determine its location.

Furthermore, each remote unit **202-1** includes a control link communication module **202c-1** and a traffic data communication module **202d-1**. The control link **202c-1** passes commands and response information through communication

5 network A **210A** and communication server A **212A** to the data network **220**.

The traffic data communication module **202d-1** passes traffic data through communication network B (**210B**) and communications server B (**212B**) to the data network **220**. A back end processor **224** is connected to the data network **220** for handling control link information, both commands and responses, and

10 traffic data. In addition, the customers **222** are also connected to the data network **220** so that they can access the back end processor **224**.

FIG. 2c shows the system architecture in accordance with another embodiment of the invention. The system shown in FIG. 2c differs from the system shown in

15 FIG. 2b in that each remote unit (e.g., **202-1**) may have multiple traffic modules (**202d1-1 – 202dN-1**). Each remote unit **202-1** may include a location unit **202a-**

1 that allows the remote unit to accurately determine its location. Additionally, each remote unit **202-1** includes a control link communication module **202c-1** and includes multiple traffic data communication modules (**202d1-1 – 202dN-1**).

20 The control link passes command and response information through communication network A **210A** and communication server A **212A** to the data network **220**. Each traffic data communication module 1 through N (**202d1-1 – 202dN-1**) passes traffic data through communication network B-1 (**210B-1**)

through B-N (**210B-N**), respectively, and through communication servers B-1
(**212B-1**) through B-N (**212B-N**), respectively, to the data network **220**. A back
end processor **224** is connected to be data network **220** for handling control link
information, both commands and responses, and traffic data. In addition, the
5 customers **222** are also connected to the data network **220** so that they can
access the back end processor **224**.

FIG. 2d shows the system architecture in accordance with a further embodiment
of the invention. The system in FIG. 2d differs from the system shown in FIG. 2c
10 in that multiple control link communication networks may be used. This is
particularly important in systems in which the remote units are deployed in
different cities. It may be preferable in this case to use a different control link
communication network in different cities depending on the wireless system
coverage and the data pricing structure.

15 Each remote unit (**202-1 – 202-N**) may include a location unit (**202a-1 – 202a-N**)
that allows the remote unit to accurately determine its location. Furthermore,
each remote unit (**202-1 – 202-N**) includes a control link communication module
(**202c-1 – 202c-N**) and includes multiple traffic data communication modules
20 (**202d1-1 – 202dN-1 – 202d1-N – 202dN-N**). The control link passes commands
and response information through one of communication network A-1 (**210A-1**)
through A-N (**210A-N**) depending on the appropriate communication network for
the specific remote unit. Each control link communication network A-1 (**210A-1**)

through A-N (**210A-N**) is connected to a respective communication server A-1 (**212A-1**) through A-N (**212A-N**) which allows command and response information to be passed to the data network. Each traffic data communication module 1 (**202d1-1**) through N (**202d1-N**) passes traffic data through communication network B-1 (**210B-1**) through B-N (**210B-N**), respectively, and through communication servers B-1 (**212B-1**) through B-N (**212B-N**), respectively, to the data network. A back end processor **224** is connected to the data network **220** for handling control link information, both commands and responses, and traffic data. In addition, the customers **222** are also connected to the data network **220** so that they can access the back end processor **224**.

FIG. 2e shows the system architecture in accordance with another embodiment of the invention. The system in FIG. 2e differs from the system shown in FIG. 2d in that both mobile and stationary remote units are shown. Because the traffic data communication channels in FIG. 2e are the same as those in FIG. 2d, they have been omitted in order to simplify the diagram. The control links for the mobile remote units (**202-1 through 202-N**) are the same as those described in FIG. 2d.

Each stationary remote unit (**202-X through 202-Y**) may include a location unit (**202a-X through 202a-Y**) that allows the remote unit to accurately determine its location. The location unit (**202a-X through 202a-Y**) is generally optional in the stationary remote units since their location is presumably known. The stationary

remote units each include a control link module (**202c-X through 202c-Y**) which is connected via a respective wired line to a respective communication network C-1 (**210C-1**) through C-N (**210C-N**) and associated communication server C-1 (**212C-1**) through C-N (**212C-N**) which allows command and response

5 information to be passed to the data network **220**. A back end processor **224** is connected to be data network **220** for handling control link information, both commands and responses, and traffic data. In addition, the customers **222** are also connected to the data network **220** so that they can access the back end processor **224**.

Remote Unit

The remote unit has a variety of attributes in accordance with one embodiment of the invention. The remote unit should preferably be portable in terms of size and weight so it can be deployed in a vehicle or in a stationary public area. Possible vehicles include buses, police vehicles, taxis, postal vehicles, delivery vehicles, and fleet vehicles just to name a few. Examples of stationary public areas include airports, train stations, bus stations, and any public area where large numbers of people use wireless devices.

Another attribute of the remote unit is that it is mountable either in a vehicle or in a public area. There are a variety of methods that can be used for mounting the remote unit. For example, the remote units can be mounted to a DIN bar that is

commonly used for industrial equipment. Alternatively, the remote units can be mounted using a standard bracket, tie device, fabric strap, bolts, or adhesive device such as Velcro, for example.

- 5 A further attribute of the remote unit is that it is able to withstand a wide temperature range such as the industrial temperature range of -40 degrees C to + 80 degrees C, for example. This attribute allows deployment of the remote unit in a wide range of geographical environments. Furthermore, it allows deployment of the remote unit in places such as the trunk of a vehicle in which
10 airflow is limited.

Another attribute of the remote unit is the ability to withstand vibration. This attribute is important since many of the remote units may be deployed in vehicles and will be subjected to severe vibration. There are a variety of standard
15 techniques that can be used to improve the vibration performance of the remote unit. These include using frequency absorbing mounting materials and potting the components on the printed circuit board for added stability.

- A further attribute of the remote unit is that it meets all local standards for
20 emissions, both radiated and conductive. For example in United States, the emissions from most digital devices are covered by FCC part 15 and emissions from cellular devices are covered by FCC part 22. In Europe, there generally are directives which cover radiated emissions, conductive emissions, and radiated

immunity and which must be met in order to receive the CE mark.

Another attribute of the remote unit is the ability to handle the input power source. First, the remote unit should include some type of power regulation.

5 This is particularly important in a vehicular environment in which the power provided by the vehicle battery is very noisy. Additionally, the remote unit should include the ability to power any external modules or peripherals that are going to be attached to the main control unit. Furthermore, the remote units may include some form of battery backup with an automatic charger so that the remote unit in
10 a mobile environment does not drain the vehicle battery when the ignition is turned off. This requirement is not as important in a stationary deployment since the power can be provided from an AC outlet using a DC transformer. However, one may choose to include the battery and charger in this configuration also in order to provide battery backup in the event of an AC power failure. Finally, the
15 remote unit may include some form of sleep mode which is used to conserve power during periods of sporadic activity.

The remote unit will now be described with regard to a variety of embodiments in accordance with the invention. FIGS. 3a through 3d show a variety of basic
20 architectures for the remote unit. FIGS. 4a through 4d show a variety of possible implementations for the remote unit.

FIG. 3a shows the basic architecture for the remote unit in accordance with one

embodiment of the invention. The remote unit **300** comprises a control unit **302**, a location unit **304**, and a control link and traffic modem **306**. The control unit **302** is the main control device for the remote unit **300** and is connected to the location unit **304** and the control link and traffic modem **306**. The location unit

5 **304** determines the location of the remote unit **300**.

The control link and traffic modem **306** shown in FIG. 3a is used to communicate with the back end processor **224**. The control link and traffic modem **306** is connected to the control unit **302** in order to send and receive control information and traffic information. The control unit is generally running a main program that

10 controls the location unit **304** and the control link and traffic modem **306**.

There are a variety of ways in which the location unit **304** can determine the location in accordance with the invention. The location unit **304** may comprise a

15 GPS receiver such as those manufactured by Trimble, Ashtech, Garmin, or Magellan, for example. If the location unit **304** is a GPS receiver, the connection to the control unit **302** may be a serial communication link. In another embodiment, the location unit **304** may comprise a GPS daughterboard such as those manufactured by Avocet, Trimble, Ashtech, or Rockwell, for example. If

20 the location unit **304** is a GPS daughterboard, the connection to the control unit **302** is usually through a proprietary connector mounted on the control unit **302**. The control of the GPS daughterboard is generally accomplished using a serial connection. In a further embodiment of the invention, the location unit **304** may

comprise a GPS chipset or a single GPS chip which is mounted directly on the control unit **302** and which has a bus interface. Furthermore, any of the GPS implementations of the location unit can include differential GPS using RTCM or RTCA corrections or alternatively can include WAAS capabilities.

5

It is well known to those of ordinary skill in the art that there are a variety of alternative implementations for the location unit that don't involve standard GPS. For example, one can use a distributed GPS system, such as the one developed by SnapTrack, in which part of the GPS functionality is handled by a centralized
10 server. Another alternative location option is the use of a triangulation technique using either angle of arrival or time difference of arrival information. Although the generic term triangulation is used, there is no requirement that three measurement points be used. A further location option is the use of RF
fingerprinting, such as that developed by U.S. Wireless, which determines the
15 unit location based on a multipath signature.

Those of ordinary skill in the art will understand that FIGS. 2a-e, 3a-d, and 4a show logical antennas rather than physical antennas. These logical antennas can be combined in virtually any combination into a single physical antenna or
20 groups of physical antennas depending on the specific requirements.

FIG. 3b shows another architecture for the remote unit **300** with separate control link modem **308** and traffic modem **310** in accordance with a further embodiment

of the invention. FIG. 3b differs from FIG. 3a in that the single control link and traffic modem **306** has been divided into a separate control link modem **308** and traffic modem **310**. The advantage of separating the control link modem **308** from the traffic modem **310** is that it allows the remote unit **300** to communicate
5 control information and traffic information over different communication networks.

It is well known to those of ordinary skill in the art that there are variety of implementations for both the traffic modem and the control link modem that will be referred to collectively as modem units. In one embodiment of the invention,
10 the modem units may comprise a handset that is connected to the control unit using a special serial cable. In an alternative embodiment of the invention, the modem units may comprise a modem module that is connected to the control unit using a special serial cable. In another embodiment of the invention, the modem units may comprise a PCMCIA card that is connected to the control unit
15 using a PCMCIA socket. In a further embodiment of the invention, the modem units may comprise a custom modem that is implemented on either a separate printed circuit board or on the same printed circuit board as the control unit. In another embodiment of the invention, the modem units may comprise a software-defined radio (SDR) in which most of the radio functionality is implemented in
20 software. The software can be running either on a separate printed circuit board or on the same printed circuit board as the control unit. In an alternative embodiment of the invention, the control link modem may comprise a 2-way data device, such as the RIM Blackberry or Motorola CreataLink, which interfaces to

the control unit via a serial connection.

The traffic modem **310** is selected so that it can work over a wireless network using a particular wireless standard. For example, the wireless network can be
5 AMPS, iDEN, CDMA, TDMA, GSM, ARDIS, MOBITECH, or CDPD. It should be noted that these standards are listed as examples and are not meant to limit the scope of the invention. It is well known to those of ordinary skill in the art that other wireless network standards such as W-CDMA, PHS, i-Burst, NAMPS, ETACS, WLL, UMTS, TETRA, and NMT may also be supported just to name a
10 few more examples.

The traffic modem **310** may implement more than one wireless standard. For example, QUALCOMM manufactures dual mode phones that support both CDMA and AMPS operation. In addition, if the traffic modem **310** is implemented
15 using a software-defined radio then it is possible to implement all of the above-mentioned standards using a single hardware platform.

The control link modem **308** is also selected so that it can work over a wireless network using a particular wireless standard. For example, the wireless network
20 can also be AMPS, iDEN, CDMA, TDMA, GSM, ARDIS, MOBITECH, or CDPD. A primary factor in selecting a wireless standard for the control link modem is the pricing policy for transmitting control link information.

FIG. 3c shows another architecture for the remote unit **300** with a control link modem and multiple traffic modems **310-1 – 310-N** in accordance with a further embodiment of the invention. FIG. 3c differs from FIG. 3b because it includes multiple traffic modems rather than a single traffic modem. The remote unit **300** architecture of FIG. 3c includes a control unit **302** that is connected to a location unit **304**, control link modem **308**, and traffic modems 1 (**310-1**) through N (**310-N**).

FIG. 3d illustrates a remote unit according to one embodiment of the present invention that includes multiple peripherals. The remote unit **300** architecture of FIG. 3d includes a control unit **302** that is connected to a location unit **304**, a control link modem **308**, traffic modems 1 (**310-1**) through N (**310-N**), battery backup **312**, external storage **314**, a wireless LAN device **316**, and an RF scanner **318**. The location unit **304**, control link modem **308**, and traffic modems 1 (**310-1**) through N (**310-N**) are implemented in the same manner as discussed above with reference to FIG. 3c.

The battery backup **312**, shown in FIG. 3d, provides power to the remote unit **300** when the main power is not available. If the remote unit **300** is mounted in a vehicle, the battery backup **312** is used when the vehicle ignition is turned off in order to ensure that the remote unit **300** does not drain the vehicle battery while the vehicle is parked. If the remote unit **300** is mounted in a stationary location, the battery backup **312** may be used to provide power if the main power is cut off

due to a power failure in the building. In accordance with one embodiment of the invention, the battery backup **312** includes a battery and a battery charger. The battery can be made from a variety of known rechargeable technologies such as sealed lead acid, NiCad, NiMH, and Lithium for example.

5

The external storage **314** provides a temporary storage capability for data that is not immediately sent back to the back end processor **224**. There are a variety of reasons for storing data in the external storage **314**. For example, if layer 3 network data is collected for the wireless network it is possible to produce 1 Mbyte/hour/technology of data. It may be prohibitively expensive to send this much data back to the back end processor **224** via the control link modem **308**. Accordingly, the data can be stored locally in the external storage **314** and be downloaded at a later time using an alternate path.

10

As another example, the collected data may be queued for transmission when the vehicle ignition is turned off. It may be preferable not to transmit the stored data until the ignition is turned back on in order to prevent unnecessary draining of the battery backup mechanism **312**. Accordingly, the data can be stored locally in the external storage **314** and queued for transmission in at a later time over the control link modem **308** when the vehicle ignition is turned on.

20

It is well known to those of ordinary skill in the art that the external storage **314** can be implemented in a variety of ways. For example, the external storage is

implemented as a PCMCIA Flash card that plugs into a PCMCIA socket on the control unit. As another example, the external storage **314** can be a SANDisk that is connected to the control unit via a proprietary connector. Alternatively, the external storage **314** is implemented using a moving storage device such as a specialized hard drive, for example a PCMCIA hard drive module. However, in mobile environments it is preferable to implement the external storage with no moving parts in order to improve the reliability of the remote unit.

The wireless LAN device **316** allows high-speed data transmission over short distances. In accordance with an embodiment of the invention, the wireless LAN device **316** is implemented, for example, using Bluetooth technology. The wireless LAN device **316** provides an alternative path for downloading data that is stored on the external storage **314**. For example, if the remote unit **300** is mounted in a taxi and layer 3 wireless network data is stored from an earlier collection operation, then the wireless LAN device **316** is free to communicate with a wireless LAN controller (not shown) located at the taxi dispatch center in order to transmit the data back to the back end processor **224**. As an alternative example, the wireless LAN device **316** can be used to communicate with a local I/O device (not shown) that can be used in a delivery truck to allow communications between a central dispatch and the delivery truck operator.

The RF scanner **318** allows increased functionality for the remote unit **300** by increasing the capabilities for performing RF optimization of the wireless network.

The RF scanner **318** allows the collection of more RF data than is traditionally available through the traffic modems (**310-1 – 310-N**). For example, the RF scanner **318** has a much more flexible input bandwidth since it is not forced to listen to a single traffic channel on the wireless network. Additionally, if the RF scanner **318** is optimized for CDMA collection, it can collect a variety of valuable CDMA network parameters such as measuring I_o in the channel, despreading the spreading codes, measuring E_c/I_o , and measuring chip delay. The RF scanner **318** can be implemented by using a commercial scanner or by developing a custom scanner, for example, using a software-defined radio.

FIG. 4a shows a hardware implementation of the remote unit **400** using either a laptop or handheld unit **402** in accordance with one embodiment of the invention. The laptop or handheld unit **402** is connected to a GPS receiver **404**, control link modem **408**, and traffic modem **410**. The laptop or handheld unit runs any of a variety of operating systems such as Windows 95/NT/CE, Linux, or Palm OS, for example. The peripheral devices **404**, **408**, **410** are connected to the laptop or handheld unit **402** via serial ports, PCMCIA ports, Ethernet, or USB as appropriate. The laptop or handheld unit **402** should have device drivers for all of the peripheral devices that are either built into the operating system or written in a higher-level language. Furthermore, the laptop or handheld unit **402** runs a main program that allows extraction of the location information from the GPS receiver **404** and sends and receives communication over the control and traffic channels.

FIG. 4b shows a hardware implementation of the remote units using a single board computer (SBC) in accordance with one embodiment of the invention. The single board computer can be purchased off-the-shelf from a variety of vendors such as SBS, ADS, or Datalogic for example. Alternatively, the single board computer can be custom designed for the specific remote unit application. FIG. 4b shows a typical architecture for the single board computer including a microprocessor **420** which is connected via an address and data bus to a boot ROM **424**, Flash memory **426**, DRAM/SRAM **428**, a PCMCIA socket **430**, a UART **432**, a USB interface **434**, an Ethernet interface **436**, a CAN interface **438**, a wireless LAN device **440**, and an optional A/D & D/A interface **442**. The microprocessor **420** may also have direct connections to a temperature sensor **444**, display interface **446**, and general-purpose I/O. Additionally, the single board computer may include power management circuitry **448** that is connected to switched power, power, and ground, and additionally connected to an optional backup battery **450**.

It is well known to those of ordinary skill in the art that the single board computer can be implemented using a variety of different technologies. For example, the microprocessor can be a StrongARM, ARM, Pentium, PowerPC, Motorola 68000, and the like. Furthermore, a variety of operating systems are available such as Windows CE, Windows 95/98, Windows NT, Linux, Palm OS, VXWorks, OS-9, PSOS, and the like. The serial ports from the UART **432**, or directly from the

microprocessor **420**, are used to interface to peripheral devices such as the traffic modem **410** or the GPS receiver **404** and should have configurable bit rates, word size, start bits, stop bits, parity bit and the ability to operate at either TTL or RS-232 voltage levels.

5

FIG. 4c shows the organization of a software-defined radio in accordance with an alternate embodiment of the invention. All of the elements of the software-defined radio **460** can be combined in any combination depending on the requirements. The elements include an RF scanner **462**, a control link modem **464**, traffic modems 1 (**466-1**) through N (**466-N**), a location unit **468**, and a wireless LAN device **470**. The advantage of using a software-defined radio architecture is that it allows implementation of multiple standards simultaneously on a single hardware device. This can greatly reduce the cost of the remote unit. The underlying architectural concepts for the software-defined radio **460** are well known to those of ordinary skill in the art and are discussed in articles in numerous journals such as the IEEE Communications Magazine.

FIG. 4d illustrates organization of the software in the remote unit in accordance with an embodiment of the invention. At the lowest level is the operating system **476** that provides basic functionality for the hardware platform. The remote unit can run a variety of operating systems such as Windows 95/NT/CE, Linux, Palm OS, VXWorks, QNX, or pSOS for example. Furthermore, depending on the requirements, it is possible to use no operating system and write platform-

specific code to implement the lower level routines.

At the next level, the remote unit software includes device drivers **478**, utilities **480**, protocols, **482** and user interface modules **484**. The device drivers **478** allow communication with the peripheral devices such as the GPS receiver **404** and the wireless modems, for example. The utilities **480** support lower-level functions such as encryption and compression, for example. The protocols **482** support any protocols that are needed in the remote unit such as a WAP browser, TCP/IP, X.25, and any proprietary packet protocols, for example. The user interface module **484** includes all of the functionality required for local control of the remote unit such as a simple menuing system. It is well known to those of ordinary skill in the art that some or all of these modules may also be built into the operating system.

At the next level, the remote unit software optionally includes a variety of additional modules such as a pre-processing module **486**, DB/Storage module **488**, and a software-defined radio module **490**. The pre-processing module **486** may be used to pre-process the collected data. This is particularly helpful in an operational scenario in which large quantities of data are collected and need to be reduced in order to conserve control link bandwidth. The DB/Storage module **488** may be used to store and organize the requested missions and/or the collected data. The software-defined radio module **490** is implemented as described above with reference to FIG. 4c.

The main application **492** is at the next level and performs the higher-level routines. For example, the main application **492** is used to receive missions over the control link, execute the missions, and transmit the mission data over the control link.

In the implementations described above, the control unit **302** is shown as being a general purpose computer in the form of a laptop or handheld unit **402**. Although this has certain advantages in terms of flexibility of programming, the invention may also be implemented using special purpose computers in lieu of general purpose computers.

Back End Processor

FIG. 5a shows the architecture of the back end processor **500** in accordance with one embodiment of the invention. The back end processor **500** includes the following processing elements: fleet management **502**, test traffic generator **504**, post processor **506**, user interface **508**, portal **510**, mapping **512**, and billing and accounting **514**. These processing elements are interconnected by a data network **516**. It is well known to those of ordinary skill in the art that the data network **516** can be either a LAN, WAN, inter processing communications within a computer or network, or any combination of the above.

FIG. 5b shows the architecture of the back end processor **500** in accordance with a further embodiment of the invention. The back end processor includes the following processing elements: fleet management **530**, test traffic generator **532**, post processor **534**, user interface **536**, and portal **538** including a mapping element **538a** and a billing and accounting element **538b**. In addition, the fleet management element **530** is connected to a collected data database **540**, mission database **542**, and remote unit database **544**; the post-processing element **534** is connected to a post-processed database **546** and the collected data database **540**, and the portal **538** is connected to a mapping database **548** and a billing and accounting database **550**.

The fleet management element **530** is the main interface in the back end processor for communicating with the remote units. The fleet management element keeps track of the remote units by accessing data in the remote unit database **544**, performs mission planning and coordination based upon information provided from the user interface **536**, sends and receives information to the test traffic generator **532** in order to generate terrestrial originated calls, and sends and receives commands and responses to the remote units via the control link.

The fleet management element **530** receives mission requests from the user interface **536** and stores the information in the mission database **542**. It then performs a scheduling function based on the requested missions stored in the

mission database **542** as compared with the remote units available as determined by availability information stored in the remote unit database **544**.

The scheduled missions are stored in the mission database **542** as requested missions and are sent at the appropriate time to the remote units over the control
5 link. The requested missions can be stored and sent as a batch of missions or can be sent as individual missions depending on the requirements.

The information received by the fleet management element **530** is stored in the collected data database **540** and forwarded to the post processor element **534**
10 that stores raw mission data and also performs post processing and stores the post processing results.

The post processing involves processing of the received data for either RF/network parameters related to the wireless system or statistical information
15 related to the wireless data access.

The analysis of the RF/network parameters can be accomplished in a variety of ways such as those discussed in Provisional Patent Application No. 60/149,888 entitled "Wireless Telephone Network Optimization" that was filed on August 19,
20 1999, and which is incorporated by reference herein in its entirety for all purposes. This provisional disclosure provides a simulation environment to develop optimum coverage-related parameters for sectors of a wireless network. This simulation environment allows a network engineer to vary parameters of a

virtual model of the wireless network and observe how the changes affect coverage. The provisional disclosure further provides an optimization algorithm to optimize hand off timing parameters for sectors in a wireless network. The optimization algorithm analyzes measured data regarding network coverage and regional terrain to arrive at a report containing recommended values for window size parameters (code division systems) or time advance parameters (time division systems).

The post processing for statistical analysis involves the wireless data access that is accomplished using the traffic modem in the remote unit. The statistical analysis allows the combination of various collected information in order to produce reports for specific customers. For example, the latency of WAP accesses to a specific URL is measured over several different wireless networks and displayed on a bar graph. Further examples of statistical analysis and report generation are discussed in the operation section with respect to FIGS. 8a-8f.

The user interface element **536** is connected to the fleet management element **530** in order to schedule missions based on requirements entered by the customers. Additionally, the user interface element **536** is connected to the post-processing element **534** to allow users to generate special queries, access previously stored queries, or access reports that are generated from the post processed data. The user interface element **536** is also connected to the portal **538** to allow access for the customers **560** from a connected data network such

as the Internet **562**.

The portal element **538** acts as an operating system providing a variety of low-level functions for multiple applications. The portal **538** includes a mapping
5 element **538a** and a billing and accounting element **538b**. The portal **538** is connected to databases **548**, **550** for the mapping information and the billing accounting information. In addition, the portal **538** is connected to the data network **562**, such as the Internet, to allow customer entry into the system. The portal is also connected to the post processor **535** to allow access of the post-
10 processed data for visualization with the mapping software, for example.

FIG. 5c shows the architecture for the portal **570** in accordance with one embodiment of the invention. The portal **570** acts as an operating system providing common low-level functions for a variety of applications and acting as
15 an interface for customer access through the Internet. The portal **570** functions are organized into four major groups: databases **572**, GUI controls **574**, workgroup functions **576**, and security **578**. The database **572** functions include terrain, morphology, buildings, and billing and accounting. The GUI controls **574** include mapping/GIS, charts, and virtual reality. The workgroup functions **576**
20 include access controls and threaded dialogue. The security functions **578** include login, partitioning, and audit trails. The portal also includes an API **580** that allows access to various applications.

Control Link Communication Protocol

The control link allows communications between the multiple remote units and the back end processor. There are a variety of possible protocols for the control link. The communication protocol can be a standard protocol such as TCP/IP, WAP, or X.25, for example, or a proprietary protocol that is optimized for the required communications, or some combination of a standard and proprietary protocol.

In accordance with one embodiment of the invention, a proprietary packet protocol is used. One issue regarding the packet protocol is the issue of acknowledgments for packets.

Acknowledgments can be handled in a variety of ways. They can be sent as an individual packet for each substantive packet sent. This is the heartiest mechanism but it is bandwidth inefficient. Alternatively, acknowledgments can be sent as a field of a subsequent packet using a packet numbering scheme to indicate which previous packet is being acknowledged. This method requires more overhead at each end of the communication link in order to keep track of previously sent packets, but is more efficient in terms of bandwidth used. As another alternative, the acknowledgment system can be handled by the communication system itself so that the packet protocol does not have to address the issue. For example, many two-way data systems have a built-in

acknowledgment system so that packet delivery is virtually guaranteed. In this case, it is not required to include acknowledgments in the packet protocol since they are handled at another level.

- 5 There are two basic types of packets: signaling packets and data packets

The signaling packets are originated either at the remote unit or at the back end processor. Some examples of remote unit originated packets are ignition on, ignition off, and status update. The Ignition on packet indicates that the vehicle
10 ignition has been turned on and the ignition off packet indicates that the vehicle ignition has been turned off. These packets are used by the back end processor in order to properly schedule data collection in a mobile remote unit. The status update packet indicates the current status of the remote unit.

- 15 Some examples of back end originated packets are reset and status request. The reset packet is used to remotely reset the remote unit. The status request packet is used to remotely request status information for a remote unit.

The data packets are also either originated at the remote unit or at the back end
20 processor. The back end originated data packets generally consist of mission requests and the remote unit originated data packets generally consist of mission data.

FIG. 6a shows examples of some of the fields in the remote unit originated packets (both data and signaling) **610** in accordance with one embodiment of the invention. Some examples of the packet fields include a packet type ID **610a**, remote unit ID **610b**, date and time **610c**, message number **610d**, mission ID number **610e**, location information **610f**, payload information **610g**, and checksum information **610h**. The packet type ID field **610a** indicates the type of packet so that the back end processor will know how to parse the packet for the proper fields. The remote unit ID field **610b** is used to identify the remote unit sending the packet. The date and time field **610c** indicates the date and time that the measurement is taken. The message number field **610d** is used to keep track of the message for acknowledgment purposes. The mission ID number field **610e** is used by data packets to indicate the corresponding back end mission that caused generation of the packet's payload information. The location information field **610f** indicates the remote unit location at the time of data collection. The checksum information field **610h** is used in order to ensure the integrity of the packet information. The term checksum is used generically to refer to any type of error correction and/or error detection method to ensure packet integrity.

The remote unit originated data packet's payload information field **610g** can take a variety of forms. It may include call statistics such as connect time, call duration, whether the call failed to connect or was dropped, and the like. Additionally, it may include basic RF engineering measurements such as RSSI,

BER, FER, SQE, and the like. Furthermore, the payload information may include Layer 3 information that discloses call routing data and information regarding the configuration of the wireless network. The Layer 3 information may be collected in totality or filtered by pre-processing in the remote unit depending on the amount of information desired. In addition, the payload may include application information such as the access latency for a WAP page or the delay in receipt of an SMS message.

FIG. 6b shows examples of some of the fields in the back end processor originated packets (both data and signaling) **620** in accordance with one embodiment of the invention. Some examples of the packet fields include a packet type ID **620a**, remote unit ID **620b**, date and time **620c**, message number **620d**, mission ID number **620e**, payload information **620f**, and checksum information **620g**. The packet type ID field **620a** indicates the type of packet so that the remote unit will know how to parse the packet for the proper fields. The remote unit ID field **620b** is used to identify the remote unit receiving the packet. The date and time field **620c** indicates the date and time that the packet is sent. The message number field **620d** is used to keep track of the message for acknowledgment purposes. The mission ID number field **620e** is used by data packets to indicate the back end mission that will cause generation of the packet's payload information. The checksum information field **620g** is used in order to ensure the integrity of the packet information. The term checksum is used generically to refer to any type of error correction and/or error detection

method to ensure packet integrity.

The back end processor originated data packet's payload information field **620f** can take a variety of forms. It may include mission info regarding the type of data to collect including the type of access (WAP, circuit switched data, etc), a trigger related to the time (or range of times) to make the test call, a trigger related to the location (or range of locations) to make the test call, a wireless system to test (if the remote unit supports multiple wireless traffic standards), a target phone number or URL, and whether the call is mobile or terrestrial originated.

It should be noted that the packet field types described above are for illustrative purposes and in no way limit the actual fields that may be used.

The information in the packet can be sent as either ASCII or binary data. ASCII is useful since some two-way data systems are used for paging and will only pass ASCII text information. Binary storage is useful because it is more bandwidth efficient than ASCII. Furthermore, the packet information can be compressed by a variety of standard methods such as null compression, run-length compression, keyword encoding, adaptive Huffman coding, Lempel-Ziv coding, and the like. Additionally, the packet information can be encrypted by a variety of standard methods such as DES, triple DES, RSA, PGP, and the like.

In accordance with one embodiment of the invention, the packets are combined

in larger files for transmission over the control link. This is advantageous in an environment in which the control network charges a fixed charge per packet.

Accordingly, larger files may be more cost effective. Furthermore, it may be advantageous to store the collected information at the remote unit for

5 transmission at a later time. This can occur if Layer 3 information is collected since the data may be collected faster than it can be sent over the control link. Additionally, the collected information may be stored at the remote unit if the vehicle ignition is turned off during a mission in a mobile environment. This occurs because the system tries to reduce transmissions when the ignition is off
10 in order to extend battery life.

METHOD FOR MEASURING

FIG. 7a shows a method for measuring data quality of service in a wireless
15 network in accordance with one embodiment of the invention. The method includes the steps of sending command information 702, performing measurements 704, and receiving response information 706.

For example, the step of sending command information 702 may include using a
20 back end processor to send either data or signaling packets to the remote units of a measuring system such as the one described previously. Furthermore, the step of performing measurements 704 may include performing any of a variety of measurements such as latency of wireless Internet access, e-commerce

transactions, wireless messaging, or push technologies. The step of receiving response information 706 may include responses to status inquiries or data related to the measurements collected during the step of performing measurements 704.

5

FIG. 7b shows a method for measuring data quality of service in a wireless network, including at least one step related to the wireless network infrastructure, in accordance with a further embodiment of the invention. The method includes the sending 702, performing 704, and receiving 706 steps described with respect to FIG. 7a. Additionally, the method includes steps of monitoring a WAP Gateway 710 and Benchmarking at a WAP Gateway 712.

10

The step of monitoring the WAP Gateway 710 may include monitoring traffic through the WAP Gateway and providing metrics such as throughput, latency and lost packet information. Furthermore, the monitoring step 710 may allow the collection of protocol information directly from the WAP Gateway that may not be available to the multiple remote units. The step of benchmarking at the WAP Gateway 712 may allow latency measurements without including the uncertainties of the latency through the Internet or data network itself. This allows the provision of data indicating a breakdown between the latency of the wireless network and the data network.

15

20

It is important to note that in regard to steps 710 and 712 that the closeness to the WAP gateway is described from a logical, not a physical, standpoint. It will be appreciated by those of ordinary skill in the art that these process steps can be accomplished with well known techniques in which the monitoring or

5 benchmarking element is located far away from the WAP gateway. Furthermore as previously discussed, the term WAP is being used generically to describe any type of wireless Internet protocol, including HDML, WAP competitors, and any future wireless Internet protocols that may be developed.

10 FIG. 7c shows a method for measuring data quality of service in a wireless network, including at least one additional order independent step, in accordance with another embodiment of the invention. The method includes the sending 702, performing 704, and receiving 706 steps described with respect to FIG. 7a. Additionally, the method includes steps of accessing from the Internet 720,
15 scheduling missions 722, generating test traffic 724, storing at a remote unit 726, pre-processing at a remote unit 728, post-processing at the back end 730, and organizing remote unit information 732.

The step of accessing from the Internet 720 may include the ability to access the
20 measuring system from the Internet through a portal to set up missions and retrieve reports generated from the post-processed data, for example. The step of scheduling missions 722 may include establishing parameters related to the specific data to be collected by the system. For example, these parameters may

include some of the following: type of access – WAP, SMS, Instant Messaging, Push data, and the like.; type of Device – WAP, PDA, Pager, wireless modem, and the like.; trigger – time of call, location of remote unit, or some combination; wireless system – Sprint, Nextel, AT&T, and the like.; call Info – Target phone#, URL, type of transaction, etc; and mobile or terrestrial originated call. The step of generating test traffic 724 may include generation of SMS messages or other data packets to be sent to the remote units, for example.

The step of storing at the remote unit 726 may include the storing of missions and of collected data at the remote unit. The step of pre-processing at the remote unit 728 may include processing received data prior to storing the data or transmitting it to the back end processor. The step of post-processing at the back end 730 may involve processing of the received data for either RF/network parameters related to the wireless system or statistical information related to the wireless data access. The step of organizing remote unit information may include storage of remote unit identification information in a remote unit database, storage of collected data in a collected data database, or storage of post-processed data in a post-processed data database, for example.

It should be noted that the flow arrows in FIGS. 7a-7c are shown merely for illustrative purposes and do not reflect a required order for the method steps.

OPERATIONAL AND BUSINESS MODEL

The previous sections of this description have discussed a method and system for measuring data quality of service in a wireless network using multiple remote units and a back end processor. The method and system may also include an element that is located within the wireless network infrastructure, for example, at the WAP gateway to monitor the wireless data protocol and to perform benchmarking measurements.

In light of those previous sections, the following section discloses the operational and business model for the system in accordance with a further embodiment of the invention.

Rather than selling measurement equipment as a final product, the system, as defined by the invention, preferably sells the collected data and statistics generated from the collected data as the final product. The trade name for this service is preferably "Bitwise." The data and statistics generated by the system do not need to be real-time, but as previously disclosed the system will support near real-time data if desired. Typically, the data will be collected and analyzed over a period of time such as a day, week, month, or even a year depending on the user's requirements.

The types of data collected include latency, call statistics (such as call completion, call dropped, etc), BER/FER, and various wireless network

parameters such as RSSI and Layer 3 information. For example, the latency time is a measure of the access time for a WML page from a WAP server or the time to complete a Web transaction. Furthermore, the system can divide the latency measurement into the wired network and wireless network contribution
5 through the use of a component located at the WAP gateway.

Furthermore, the remote units can be used to perform additional functions that have value in vertical markets. For example, if the remote units are fielded in a mobile environment in a fleet of vehicles, the remote units can provide automatic
10 vehicle location (AVL) in addition to data quality of service measurements.

Additionally, the position data from the mobile remote units could be processed to provide near real-time traffic information which could be disseminated, for example, over the Internet.

15 There are a variety of possible pricing strategies for the data and statistics produced by the system. The user may be charged per minute of system use or per transaction. Alternatively, the user may be charged per city, per wireless carrier, and per month for the requisite data and statistics. Furthermore, the post-processing element produces aggregate industry-wide statistics, for
20 example comparing different wireless carriers or content providers, which is preferably packaged and sold as a separate product.

The customers for the system have a variety of common attributes. They are

dot.com and e-commerce companies that are targeting wireless device users by porting their content and commerce to wireless web sites. Furthermore, they generally have a need for timely dissemination of content and transactions and have a keen interest in a positive customer experience.

5

The customers can be divided into a variety of different groups. They can be wireless operators who wish to measure the performance of their networks in order to increase traffic and optimize performance. Furthermore, the customers can be wireless portals and/or ISPs such as AOL, Yahoo, Alta Vista, MSN,

10 Lycos, and Excite, just to name a few examples. Additionally, the customers can be content providers in a variety of fields such as the service arena providing financial, weather, or traffic content; the internet auction arena involving time-sensitive bidding information; the instant messaging arena such as the AOL Anytime, Anywhere program; and the push data technology arena in which
15 information such as airline information and traffic updates are pushed to the mobile device.

The reasons that customers would use the system, in accordance with an embodiment of the invention, are fairly straightforward. It allows the customer to
20 see the wireless Internet transaction through the end user's eyes in terms of their experience when accessing content and conducting transactions from wireless devices. In addition, it allows the customers a method for evaluating and comparing the performance of the wireless networks that are delivering the

content. Furthermore, it allows the wireless operators and the content providers solid data to pinpoint bottlenecks and performance problems in the network. Additionally, it provides information to alert staff to critical service failures so corrective action can be taken in a timely manner.

5

There are a variety of potential measurements that can be taken. Each measurement is referred to as a mission. Some examples of missions include retrieval of a WML page, completion of an e-commerce transaction, receiving pushed data content, performing a secure transaction, and performing

10 benchmarking of different parts of the network by using a component located at the WAP gateway.

There are a variety of methods for inputting requested missions. If the customer wishes, they can discuss their requirements with the system operator and allow
15 the system operator to enter the missions. Alternatively, a user interface in the back end processor allows the customers to enter their own missions over the Internet by entering through the portal.

The parameters for a mission may include at least the following items:

20 Type of access – WAP, SMS, Instant Messaging, Push data, and the like.

 Type of Device – WAP, PDA, Pager, wireless modem, and the like.

 Trigger – time of call, location of remote unit, or some combination

Wireless System – Sprint, Nextel, AT&T, and the like.

Call Info – Target phone#, URL, type of transaction, etc

Mobile or Terr. Originated.

5 The output of the system can be obtained in a variety of ways. Generally, customers can set up formatted reports that will be generated periodically with the requested data and statistical information. The reports are obtainable in a variety of ways such as viewed using a Web browser, sent as an attachment to e-mail, sent as a file using FTP or some other protocol, or sent via normal mail
10 just to name a few examples. The reports can be arranged in a variety of formats depending on the customer requirements with examples provided in the following figures.

FIG. 8a shows a bar graph output **810** of download times from different portals, in
15 accordance with an embodiment of the invention. The y-axis of the bar graph relates to the average download time in seconds and the x-axis relates to the city in which the measurement was performed. The three bars represent measurements for Yahoo, AOL, and a portal index of measurements over all portals. The statistics shown are for all wireless carriers, with a measurement
20 interval of 15 minutes between 6 AM and 12 PM, for the period from 03/01/00 to 03/07/00.

FIG. 8b shows a bar graph output **820** of download times across different

wireless networks, in accordance with an embodiment of the invention. The y-axis of the bar graph relates to the average download time in seconds and the x-axis relates to the city in which the measurement was performed. The three bars represent measurements for Nextel, Sprint PCS, and AT&T Wireless. The statistics shown are for access to Yahoo, with a measurement interval of 30 minutes between 6 AM and 9 PM, for the period from 03/01/00 to 03/07/00.

FIG. 8c shows a bar graph output **830** of call completion percentage across different wireless networks, in accordance with an embodiment of the invention.

The y-axis of the bar graph relates to the call completion percentage and the x-axis relates to the city in which the measurement was performed. The three bars represent measurements for Nextel, Sprint PCS, and AT&T Wireless. The statistics shown are for access to Yahoo, with a measurement interval of 30 minutes between 6 AM and 9 PM, for the period from 03/01/00 to 03/07/00.

FIG. 8d shows a trending graph output **840** of call completion percentage across different wireless networks, in accordance with an embodiment of the invention.

The y-axis of the bar graph relates to the call completion percentage and the x-axis relates to the city in which the measurement was performed. The three bars represent measurements for Nextel, Sprint PCS, and AT&T Wireless. The statistics shown are for access to Yahoo, with a measurement interval of 15 minutes between 6 AM and 9 PM, for the period from 03/01/00 to 03/07/00.

FIG. 8e shows a bar graph output **850** of average download times with a breakdown of the network latency at the WAP gateway, in accordance with an embodiment of the invention. The y-axis of the bar graph relates to the average download time in seconds and the x-axis relates to the city in which the measurement was performed. The bars represent measurements for Nextel with statistics shown for access to Yahoo, with a measurement interval of 60 minutes between 12 PM and 12 PM, for the period from 03/01/00 to 03/07/00.

FIG. 8f shows a pie chart **860** of error statistics for wireless access of Yahoo, in accordance with an embodiment of the invention. The sectors of the pie chart show DNS lookup failure, connection timeout, page timeout, content errors, and successful error-free connections. The statistics represent error statistics for all carriers with statistics shown for access to Yahoo, with a measurement interval of 60 minutes between 12 PM and 12 PM, for the period from 03/01/00 to 03/07/00.

The present invention has been described in accordance with a number of preferred embodiments. However, it will be understood by those of ordinary skill in the art that various modifications and improvements may be made to the invention as described, without departing from the scope of the invention. The scope of the invention is limited only by the appended claims.

We Claim:

- 1 1. A method for measuring data quality of service in a traffic wireless network
2 comprising the steps of:
3 sending command information related to data quality of service
4 measurements;
5 performing measurements to produce measurement information in
6 relation to said command information; and
7 receiving response information in relation to said measurement
8 information and said command information.
9
1 2. The measuring method of claim 1, wherein said sending step uses a
2 wireless link.
3
1 3. The measuring method of claim 1, wherein said sending step uses a
2 CDPD link.
3
1 4. The measuring method of claim 1, wherein said sending step uses a
2 wireless LAN link.
3
1 5. The measuring method of claim 1, wherein said sending step uses a wired
2 link.
3
1 6. The measuring method of claim 1, wherein said receiving step uses a

2 wireless link.

3

1 7. The measuring method of claim 1, wherein said receiving step uses a
2 CDPD link.

3

1 8. The measuring method of claim 1, wherein said receiving step uses a
2 wireless LAN link.

3

1 9. The measuring method of claim 1, wherein said receiving step uses a
2 wired link.

3

1 10. The measuring method of claim 1, wherein said performing step produces
2 measurement information related to circuit switched data.

3

1 11. The measuring method of claim 1, wherein said performing step produces
2 measurement information related to packet data.

3

1 12. The measuring method of claim 1, wherein said performing step produces
2 measurement information related to SMS messages.

3

1 13. The measuring method of claim 1, wherein said performing step produces
2 measurement information related to wireless Internet access.

3

1 14. The measuring method of claim 1, wherein said performing step produces
2 measurement information related to wireless Internet transactions.
3

1 15. The measuring method of claim 14, wherein wireless Internet transactions
2 are e-commerce transactions.
3

1 16. The measuring method of claim 1, wherein said performing step produces
2 measurement information related to push data.
3

1 17. The measuring method of claim 1, wherein said performing step produces
2 measurement information related to latency.
3

1 18. The measuring method of claim 1, wherein said performing step produces
2 measurement information includes Layer 3 network information.
3

1 19. The measuring method of claim 1, wherein said performing step produces
2 measurement information includes RF information.
3

1 20. The measuring method of claim 1, wherein said performing step produces
2 measurement information includes call connection information.
3

1 21. The measuring method of claim 1, wherein said performing step
2 produces measurement information related to iDEN.

3

1 22. The measuring method of claim 1, wherein said performing step produces
2 measurement information related to CDMA.

3

1 23. The measuring method of claim 1, wherein said performing step produces
2 measurement information related to TDMA.

3

1 24. The measuring method of claim 1, wherein said performing step produces
2 measurement information related to AMPS.

3

1 25. The measuring method of claim 1, comprising the further step of:
2 monitoring WAP gateway functions.

3

1 26. The measuring method of claim 1, comprising the further step of:
2 benchmarking in relation to a WAP gateway.

3

1 27. The measuring method of claim 1, comprising the further step of:
2 accessing a portal from the Internet for said command information
3 and said measurement information.

4

1 28. The measuring method of claim 1, comprising the further step of:
2 scheduling missions related to said command information.

3

1 29. The measuring method of claim 1, comprising the further step of:
2 generating test traffic related to said measurement information.
3

1 30. The measuring method of claim 1, comprising the further step of:
2 storing said control information at a remote unit.
3

1 31. The measuring method of claim 1, comprising the further step of:
2 storing said measurement information at a remote unit.
3

1 32. The measuring method of claim 1, comprising the further step of:
2 pre-processing said measurement information at a remote unit.
3

1 33. The measuring method of claim 1, comprising the further step of:
2 post-processing said measurement information at a back end
3 processor.
4

1 34. The measuring method of claim 1, comprising the further step of:
2 organizing remote unit data, related to said command information,
3 at a back end processor
4

1 35. The measuring method of claim 1, wherein said sending step includes
2 sending said command information from a back end processor to at least
3 one of a plurality of remote unit.

4

1 36. The measuring method of claim 1, wherein said performing step includes
2 performing said measurements using one of a plurality of remote units.

3

1 37. The measuring method of claim 1, wherein said receiving step includes
2 receiving said response information at a back end processor from at least
3 one of a plurality of remote units.

4

1 38. A measuring system for measuring data quality of service on at least one
2 traffic wireless network, comprising:

3 a back end processor for controlling the measuring system;
4 a plurality of remote units, in communication with said back end
5 processor via a control link, for performing measurements on the at least
6 one traffic wireless network.

7

1 39. The measuring system of claim 38, wherein said back end processor
2 includes a fleet management element for managing said plurality of
3 remote units.

4

1 40. The measuring system of claim 38, wherein said back end processor
2 includes a test traffic generator for generating test traffic for said plurality
3 of remote units.

4

1 41. The measuring system of claim 38, wherein said back end processor
2 includes a post processor for post processing data collected from said
3 plurality of remote units.
4

1 42. The measuring system of claim 38, wherein said back end processor
2 includes a portal for allowing customer access through the Internet.
3

1 43. The measuring system of claim 42, wherein said portal includes a
2 mapping element for combining mapping information with post processed
3 data from said plurality of remote units.
4

1 44. The measuring system of claim 38, wherein each of said plurality of
2 remote units includes a control unit for controlling said remote unit.
3

1 45. The measuring system of claim 44, wherein said control unit is a portable
2 computer.
3

1 46. The measuring system of claim 44, wherein said control unit is a single
2 board computer.
3

1 47. The measuring system of claim 38, wherein each of said plurality of
2 remote units includes a location unit for providing position information.
3

1 48. The measuring system of claim 47, wherein said location unit is a GPS
2 receiver.

1 49. The measuring system of claim 38, wherein each of said plurality of
2 remote units includes a control link modem for communicating via said
3 control link with said back end processor.

1 50. The measuring system of claim 49, wherein said control link modem is a
2 CDPD modem.

1 51. The measuring system of claim 49, wherein said control link modem is a
2 software-defined radio modem.

1 52. The measuring system of claim 49, wherein said control link modem is a
2 wired modem.

1 53. The measuring system of claim 49, wherein each of said plurality of
2 remote units includes at least one traffic modem for performing said
3 measurements on a respective traffic wireless network of the at least one
4 traffic wireless network.

1 54. The measuring system of claim 53, wherein a respective traffic modem of
2 said at least one traffic modem is said control link modem.

3

1 55. The measuring system of claim 53, wherein a respective traffic modem of
2 said at least one traffic modem is a modem module.

3

1 56. The measuring system of claim 53, wherein a respective traffic modem of
2 said at least one traffic modem is a cellular phone.

3

1 57. The measuring system of claim 53, wherein a respective traffic modem of
2 said at least one traffic modem is a software-defined radio.

3

1 58. The measuring system of claim 53, wherein a respective traffic modem of
2 said at least one traffic modem is an iDEN modem.

3

1 59. The measuring system of claim 53, wherein a respective traffic modem of
2 said at least one traffic modem is a CDMA modem.

3

1 60. The measuring system of claim 53, wherein a respective traffic modem of
2 said at least one traffic modem is a TDMA modem.

3

1 61. The measuring system of claim 53, wherein a respective traffic modem of
2 said at least one traffic modem is a GSM modem.

3

1 62. The measuring system of claim 38, wherein said measurements are

2 performed on circuit switched data.

3

1 63. The measuring system of claim 38, wherein said measurements are
2 performed on packet data.

3

1 64. The measuring system of claim 38, wherein said measurements are
2 performed on SMS messages.

3

1 65. The measuring system of claim 38, wherein said measurements are
2 performed on wireless Internet access.

3

1 66. The measuring system of claim 38, wherein said measurements are
2 performed on wireless Internet transactions.

3

1 67. The measuring system of claim 38, wherein said measurements are
2 performed on wireless Internet e-commerce transactions.

3

1 68. The measuring system of claim 38, wherein said measurements are
2 performed on push data.

3

1 69. The measuring system of claim 38, wherein said measurements include
2 latency measurements.

3

1 70. The measuring system of claim 38, wherein said measurements include
2 data reliability.
3

1 71. The measuring system of claim 38, wherein said measurements include
2 Layer 3 network information.
3

1 72. The measuring system of claim 38, wherein said measurements include
2 RF information.
3

1 73. The measuring system of claim 38, wherein said measurements include
2 call connection information.
3

1 74. The measuring system of claim 38, wherein each of said plurality of
2 remote units includes a plurality of traffic modems for performing said
3 measurements on the at least one traffic wireless network.
4

1 75. The measuring system of claim 38, wherein each of said plurality of
2 remote units includes a battery backup for providing backup battery
3 power.
4

1 76. The measuring system of claim 38, wherein each of said plurality of
2 remote units includes an external storage for storing at least one of said
3 measurements.

4

1

77. The measuring system of claim 38, wherein each of said plurality of remote units includes a wireless LAN device for communicating with said back end processor.

4

1

78. The measuring system of claim 38, wherein each of said plurality of remote units includes an RF scanner for measuring the at least one traffic wireless network.

4

1

79. The measuring system of claim 78, wherein said RF scanner is a software-defined radio.

2

3

1

80. The measuring system of claim 38, further comprising:
a WAP monitor for monitoring WAP gateway functions.

2

3

1

81. The measuring system of claim 38, further comprising:
a WAP benchmarker for benchmarking in relation to a WAP gateway.

2

3

4

1

82. The measuring system of claim 38, wherein at least one of said plurality of remote units is stationary.

2

3

1

83. The measuring system of claim 38, wherein at least one of said plurality

2 of remote units is mobile.

3
1 84. The measuring system of claim 38, wherein all of said plurality of remote
2 units, within a geographic area, are stationary.

3
1 85. The measuring system of claim 38, wherein said control link is wired.

2
1 86. The measuring system of claim 38, wherein said control link is wireless.

2
1 87. The measuring system of claim 38, wherein said control link is wired and
2 wireless.

3
1 88. The measuring system of claim 38, wherein said control link uses a
2 wireless standard in relation to a geographic area of the associated
3 remote units.

4
1 ~~89.~~ A remote unit, which is one of a plurality of remote units that
2 communicates with a back end processor, for measuring data quality of
3 service on at least one traffic wireless network, comprising:
4 a control unit for controlling said remote unit;
5 a location unit for providing position information;
6 a control link modem for communicating via a control link with the
7 back end processor; and

8 at least one traffic modem for performing measurements on a
9 respective traffic wireless network of the at least one traffic wireless
10 network.
11

1 90. The remote unit of claim 89, wherein said control unit is a portable
2 computer.
3

1 91. The remote unit of claim 89, wherein said control unit is a single board
2 computer.
3

1 92. The remote unit of claim 89, wherein said location unit is a GPS receiver.
2

1 93. The remote unit of claim 89, wherein said control link modem is a CDPD
2 modem.
3

1 94. The remote unit of claim 89, wherein said control link modem is a
2 software-defined radio modem.
3

1 95. The remote unit of claim 89, wherein said control link modem is a wired
2 modem.
3

1 96. The remote unit of claim 89, wherein each traffic modem of said at least
2 one traffic modem performs measurements on a respective traffic wireless

3 network of the at least one traffic wireless network.

4
1 97. The remote unit of claim 89, wherein a respective traffic modem of said at
2 least one traffic modem is said control link modem.

3
1 98. The remote unit of claim 89, wherein a respective traffic modem of said at
2 least one traffic modem is a modem module.

3
1 99. The remote unit of claim 89, wherein a respective traffic modem of said at
2 least one traffic modem is a cellular phone.

3
1 100. The remote unit of claim 89, wherein a respective traffic modem of
2 said at least one traffic modem is a software-defined radio.

3
1 101. The remote unit of claim 89, wherein a respective traffic modem of
2 said at least one traffic modem is an iDEN modem.

3
1 102. The remote unit of claim 89, wherein a respective traffic modem of
2 said at least one traffic modem is a CDMA modem.

3
1 103. The remote unit of claim 89, wherein a respective traffic modem of
2 said at least one traffic modem is a TDMA modem.

1 104. The remote unit of claim 89, wherein a respective traffic modem of
2 said at least one traffic modem is a GSM modem.
3

1 105. The remote unit of claim 89, wherein said measurements are
2 performed on circuit switched data.
3

1 106. The remote unit of claim 89, wherein said measurements are
2 performed on packet data.
3

1 107. The remote unit of claim 89, wherein said measurements are
2 performed on SMS messages.
3

1 108. The remote unit of claim 89, wherein said measurements are
2 performed on wireless Internet access.
3

1 109. The remote unit of claim 89, wherein said measurements are
2 performed on wireless Internet transactions.
3

1 110. The remote unit of claim 89, wherein said measurements are
2 performed on wireless Internet e-commerce transactions.
3

1 111. The remote unit of claim 89, wherein said measurements are
2 performed on push data.

3

1 112. The remote unit of claim 89, wherein said measurements include
2 latency measurements.

3

1 113. The remote unit of claim 89, wherein said measurements include
2 data reliability.

3

1 114. The remote unit of claim 89, wherein said measurements include
2 Layer 3 network information.

3

1 115. The remote unit of claim 89, wherein said measurements include
2 RF information.

3

1 116. The remote unit of claim 89, wherein said measurements include
2 call connection information.

3

1 117. The remote unit of claim 89, wherein each of said plurality of
2 remote units includes a battery backup for providing backup battery
3 power.

4

1 118. The remote unit of claim 89, further comprising:
2 an external storage for storing at least one of said measurements.

3

1 119. The remote unit of claim 89, further comprising:
2 a wireless LAN device for communicating with the back end
3 processor.
4

1 120. The remote unit of claim 89, further comprising:
2 an RF scanner for measuring the at least one traffic wireless
3 network.
4

1 121. The remote unit of claim 120, wherein said RF scanner is a
2 software-defined radio.
3

1 122. The remote unit of claim 89, wherein said remote unit is stationary.
2

1 123. The remote unit of claim 89, wherein said remote unit is mobile.
2

1 124. The remote unit of claim 89, wherein said control link is wired.
2

1 125. The remote unit of claim 89, wherein said control link is wireless.
2

1 126. The remote unit of claim 89, wherein said control link uses a
2 wireless standard in relation to a geographic area of the associated
3 remote unit.
4

1 ~~127.~~ A method for measuring data quality of service in a traffic wireless
2 network using a back end processor and plural remote units, the method
3 comprising:
4 sending command information from the back end processor to at
5 least two of the plural remote units, the command information being
6 related to data quality of service measurements;
7 performing measurements on the traffic wireless network, using the
8 at least two of the plural remote units, to produce measurement
9 information in relation to said command information; and
10 receiving response information at the back end processor from the
11 at least two of the plural remote units, said response information being in
12 relation to said measurement information and said command information;
13 wherein said response information provides a measure of data
14 quality of service in the traffic wireless network.

1 ~~128.~~ A method for measuring data quality of service in a traffic wireless
2 network, the method comprising:
3 receiving command information related to data quality of service
4 measurements sent from a back end processor;
5 performing one or more measurements of performance in the traffic
6 wireless network to produce measurement information in relation to said
7 command information; and
8 sending response information in relation to said measurement

9 information and said command information to the back end processor.

10
1 ~~129.~~ A method for producing a measurement result that is indicative of
2 data quality of service in a traffic wireless network, the method comprising:
3 sending command information to plural remote units, said
4 command information being related to data quality of service
5 measurements;
6 receiving response information from the plural remote units, said
7 response information being in relation to said command information and
8 measurements performed on the traffic wireless network via the plural
9 remote units; and
10 generating a measurement result based on said response
11 information.

12
1 ~~130.~~ A system for assessing data quality of service on a wireless network,
2 the system comprising:
3 means for obtaining measurements, at a statistically significant number of
4 locations, of a performance parameter on the wireless network; and
5 means for consolidating information indicative of the measurements
6 obtained by the means for obtaining;
7 wherein the information consolidated by the means for consolidating
8 provides an assessment of data quality of service on the wireless network.

1 131. The system of claim 130, wherein the means for obtaining
2 measurements comprises plural remote units.

3

1 132. The system of claim 131, wherein a portion of the plural remote units
2 are mobile units.

3

1 133. The system of claim 131, wherein substantially all of the plural
2 measurement units are mobile units.

3

1 134. The system of claim 131, wherein substantially all of the plural
2 measurement units are stationary units.

3

1 135. The system of claim 130, wherein the means for consolidating
2 comprises a back end processor.

3

1 136. The system of claim 130, wherein the means for obtaining
2 measurements performs the function of obtaining measurements in response to
3 command information received from the means for consolidating.

4

1 ~~137.~~ A device for obtaining measurements indicative of data quality of
2 service for a wireless network providing data service, the device comprising:
3 a control link modem providing communications with a back end
4 processor;

5 a traffic modem providing communications via the wireless network;
6 a location unit providing position information; and
7 a computer, the computer comprising:
8 a processor in communication with the control link modem and
9 the traffic modem, and being connected to the location unit, and
10 a memory, connected to the processor, bearing software
11 instructions adapted to enable the computer to perform the steps of:
12 receiving command information from the back end processor;
13 sending test traffic over the wireless network based on the
14 command information received from the back end
15 processor;
16 receiving response traffic over the wireless network in reply to
17 the test traffic;
18 recording measurement information comprising information
19 regarding the test traffic, the response traffic, and
20 location information contemporaneous with the step of
21 receiving response traffic; and
22 sending the recorded measurement information to the back end
23 processor.

24
1 ~~138~~. A device for obtaining measurements indicative of data quality of
2 service for a wireless network providing data service, the device comprising:
3 a control link modem providing communications with a back end

processor;

a traffic modem providing communications via the wireless network;

a location unit providing position information; and

a computer, the computer comprising:

a processor in communication with the control link modem and the traffic modem, and being connected to the location unit, and

a memory, connected to the processor, bearing software instructions adapted to enable the computer to perform the steps of:

receiving command information from the back end processor;

receiving test traffic over the wireless network;

recording measurement information comprising information regarding the test traffic and location information contemporaneous with the step of receiving test traffic; and

sending the recorded measurement information to the back end processor.

139. A device for obtaining measurements indicative of data quality of service for a wireless network providing data service, the device comprising:

a modem providing communications with a back end processor and providing communications via the wireless network;

a location unit providing position information; and

a computer, the computer comprising:

7 a processor in communication with the modem and being
8 connected to the location unit, and
9 a memory, connected to the processor, bearing software
10 instructions adapted to enable the computer to perform the steps of:
11 receiving command information from the back end processor;
12 sending test traffic over the wireless network based on the
13 command information received from the back end
14 processor;
15 receiving response traffic over the wireless network in reply to
16 the test traffic;
17 recording measurement information comprising information
18 regarding the test traffic, the response traffic, and
19 location information contemporaneous with the step of
20 receiving response traffic; and
21 sending the recorded measurement information to the back end
22 processor.

23
1 ~~140.~~ A device for obtaining measurements indicative of data quality of
2 service for a wireless network providing data service, the device comprising:
3 a modem providing communications with a back end processor and
4 providing communications via the wireless network;
5 a location unit providing position information; and
6 a computer, the computer comprising:

7 a processor in communication with the modem and being
8 connected to the location unit, and
9 a memory, connected to the processor, bearing software
10 instructions adapted to enable the computer to perform the steps of:
11 receiving command information from the back end processor;
12 receiving test traffic over the wireless network;
13 recording measurement information comprising information
14 regarding the test traffic and location information
15 contemporaneous with the step of receiving test traffic;
16 and
17 sending the recorded measurement information to the back end
18 processor.

19
1 ~~141.~~ A method of conducting commerce, the method comprising:
2 performing measurements on a wireless network, the measurements
3 being indicative of data quality of service for the wireless network;
4 consolidating the performed measurements at a back end processor to
5 form data quality of service information; and
6 providing the data quality of service information to a customer in exchange
7 for value.

8
1 142. The method of conducting commerce of claim 141, further
2 comprising:

3 receiving a mission request from the customer, wherein the
4 measurements are performed in response to the mission request.

5

1 143. The method of conducting commerce of claim 141, wherein the
2 customer is a content provider.

113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

ABSTRACT OF THE DISCLOSURE

1 The present invention provides for a method and system for measuring
2 data quality of service in a wireless network using multiple peripatetic (i.e.
3 mobile) and/or stationary, unattended, position, and performance instruments
4 (PUPPIs) that are remotely controlled by a back end processor. In some
5 embodiments of the invention, the data service whose quality is measured
6 relates to wireless Internet access, e-commerce transactions, wireless
7 messaging, or push technologies. In other embodiments of the invention, the
8 system includes an element that is located within the wireless network
9 infrastructure, for example, at the WAP gateway to monitor the wireless data
10 protocol and to perform benchmarking measurements.

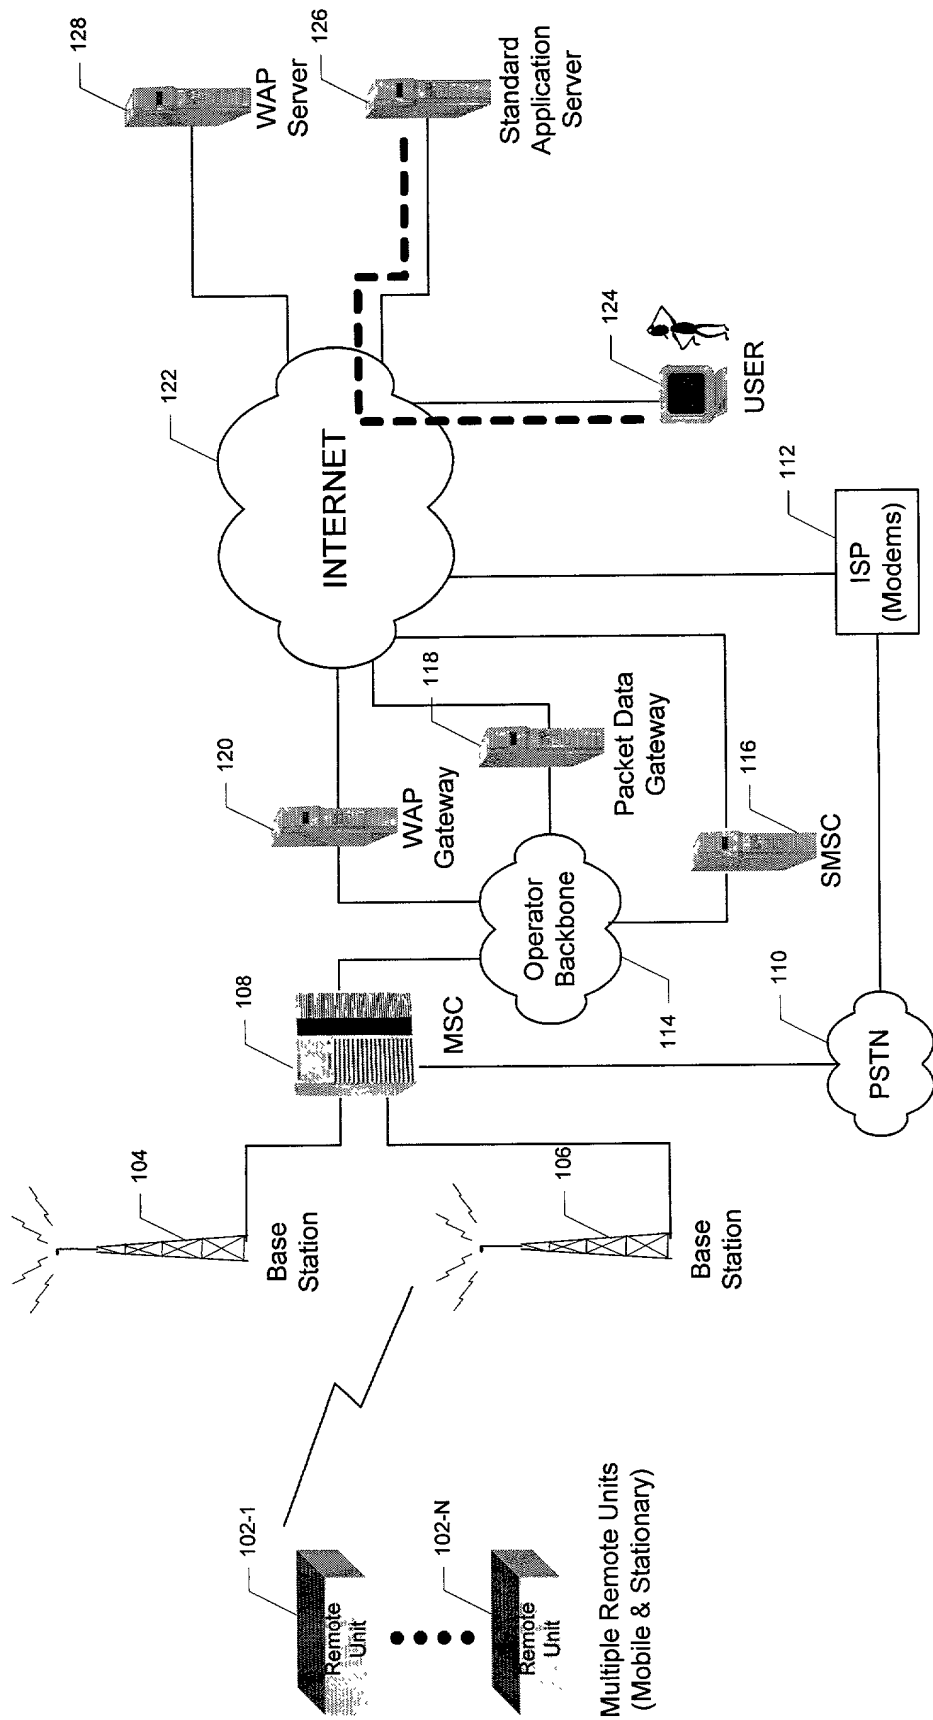


Figure 1a

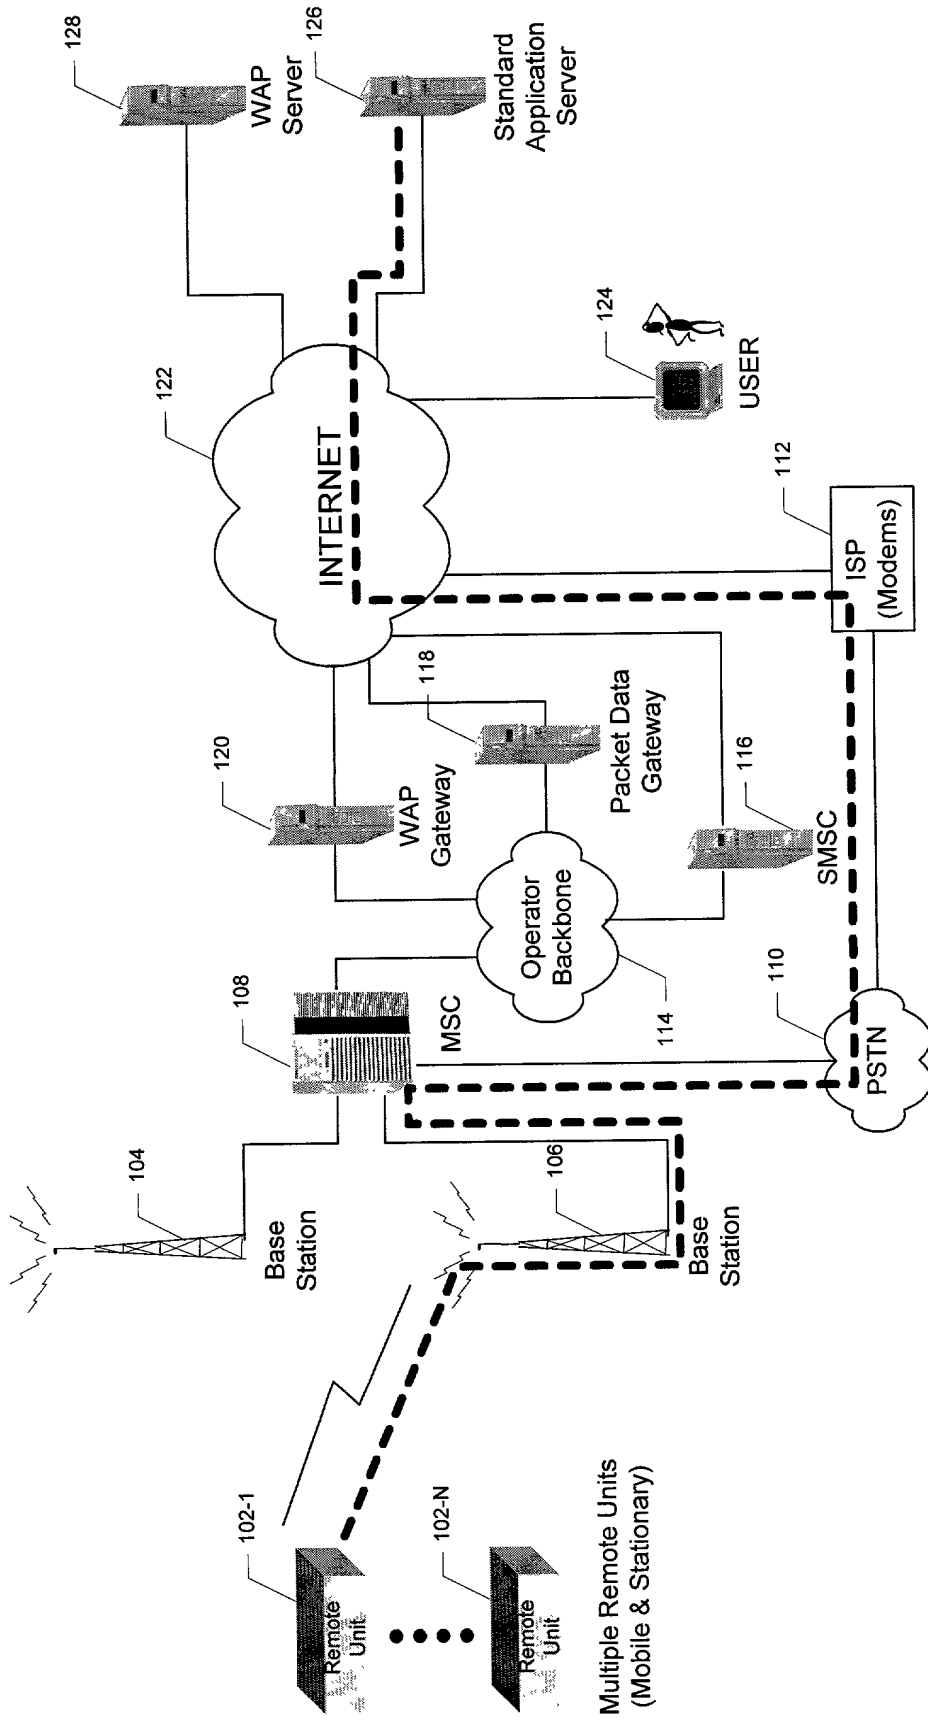


Figure 1b

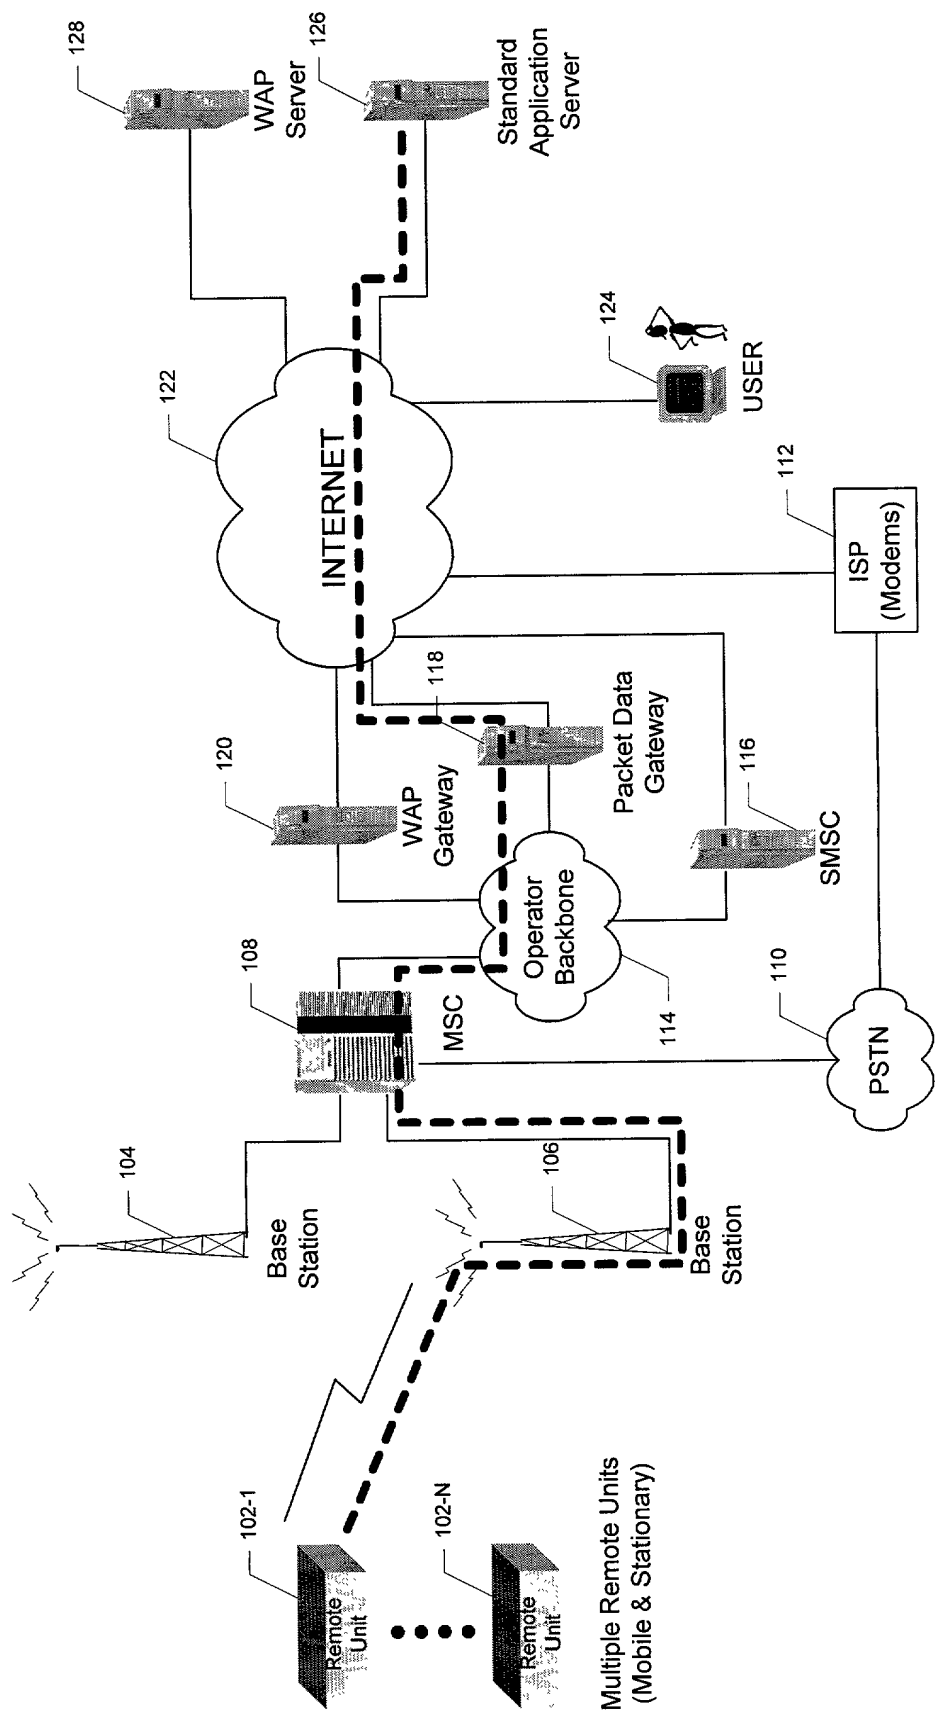


Figure 1c

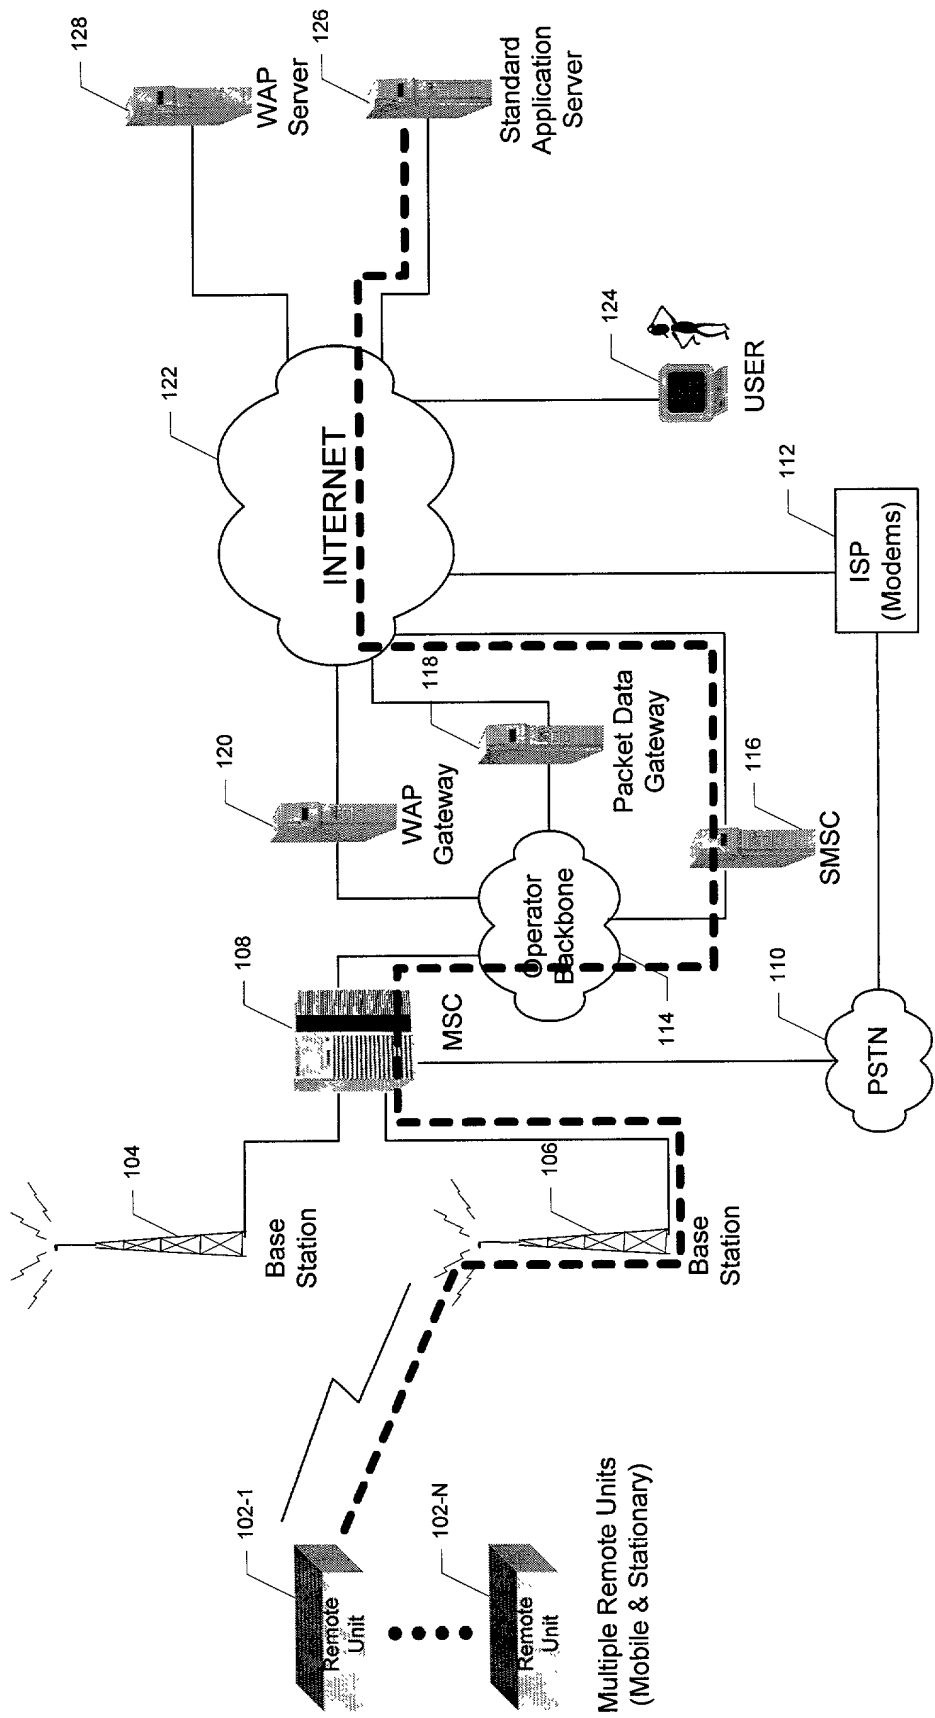


Figure 1d

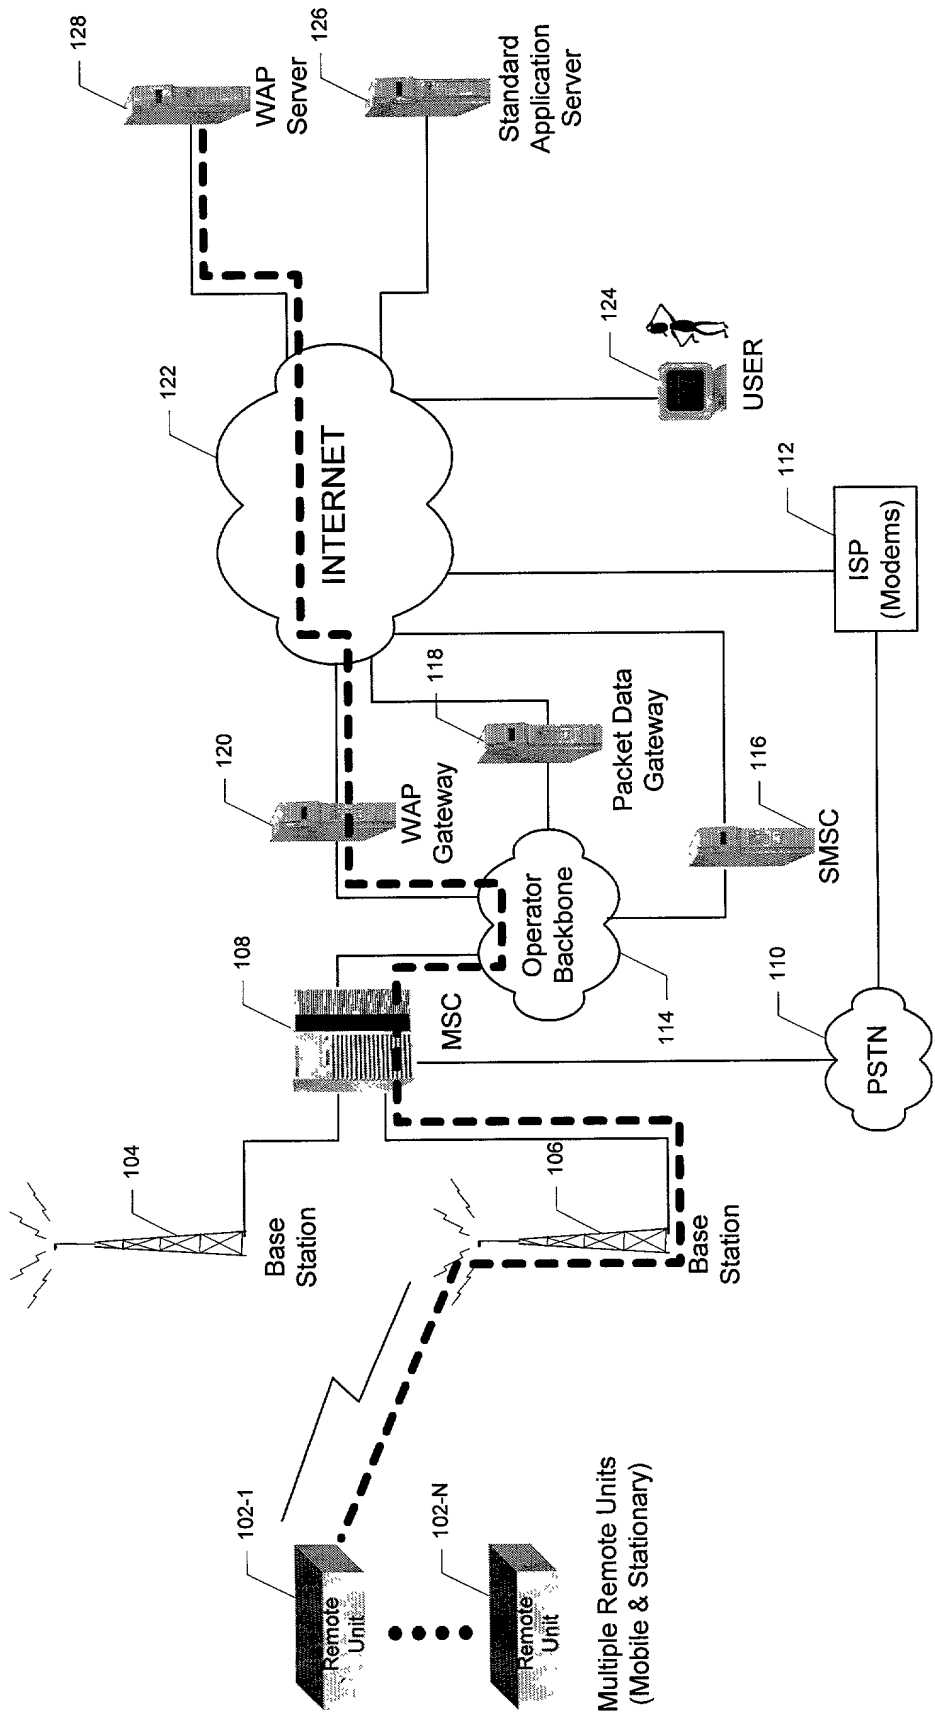


Figure 1e

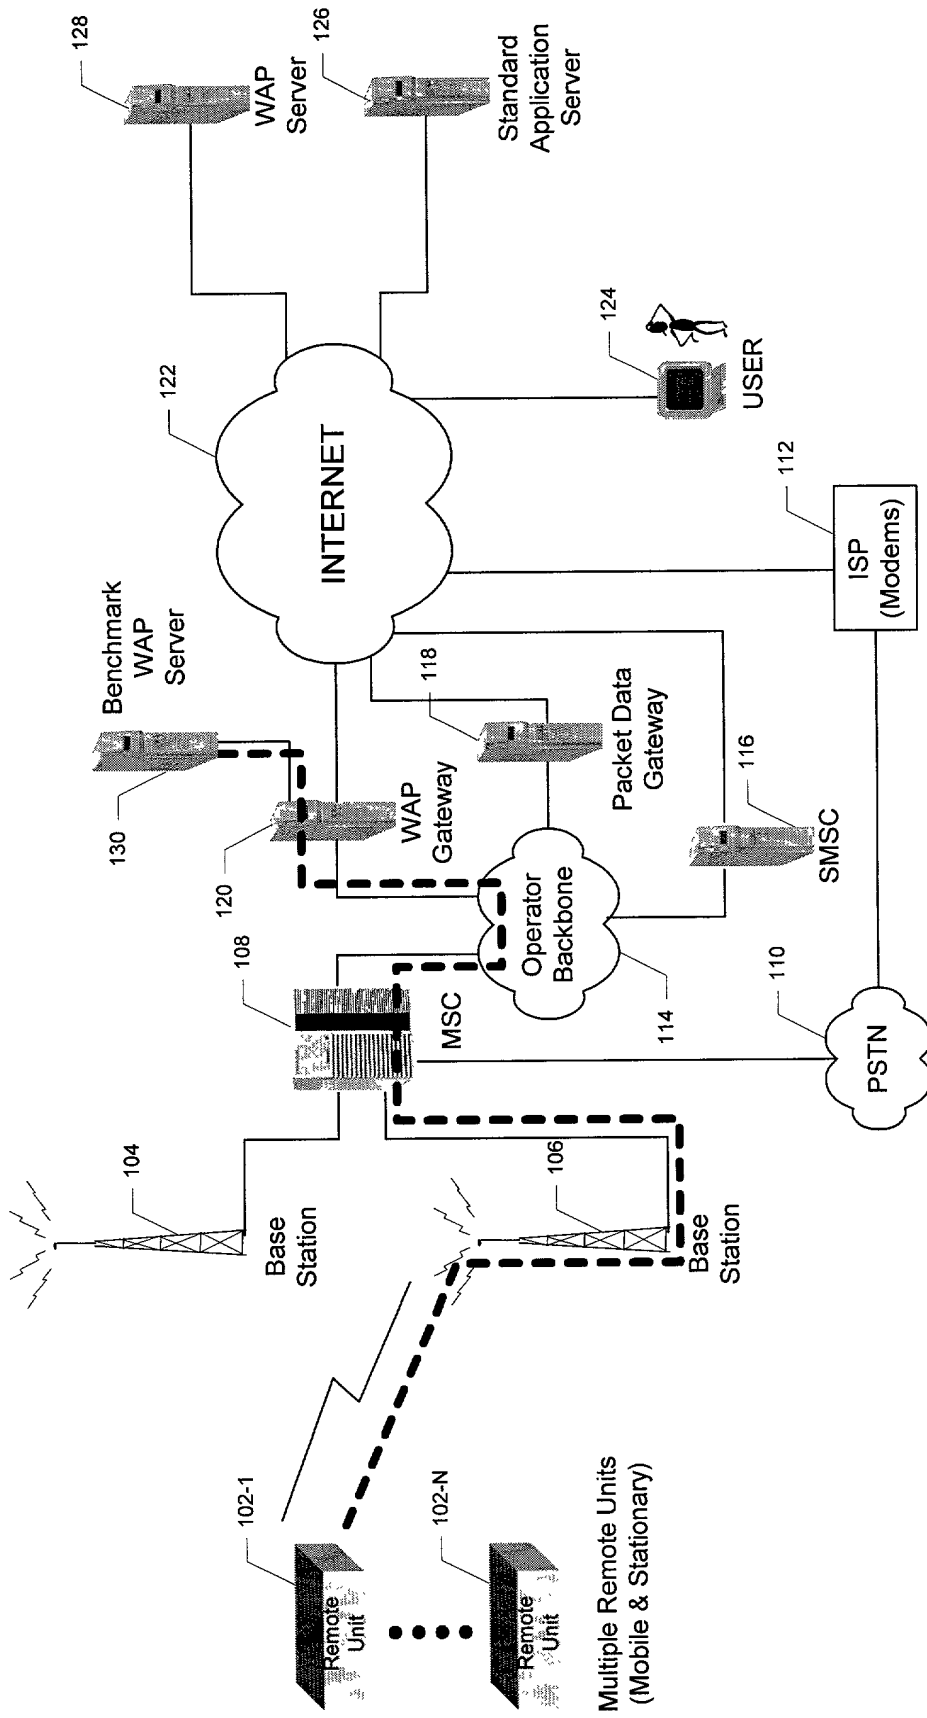


Figure 1f

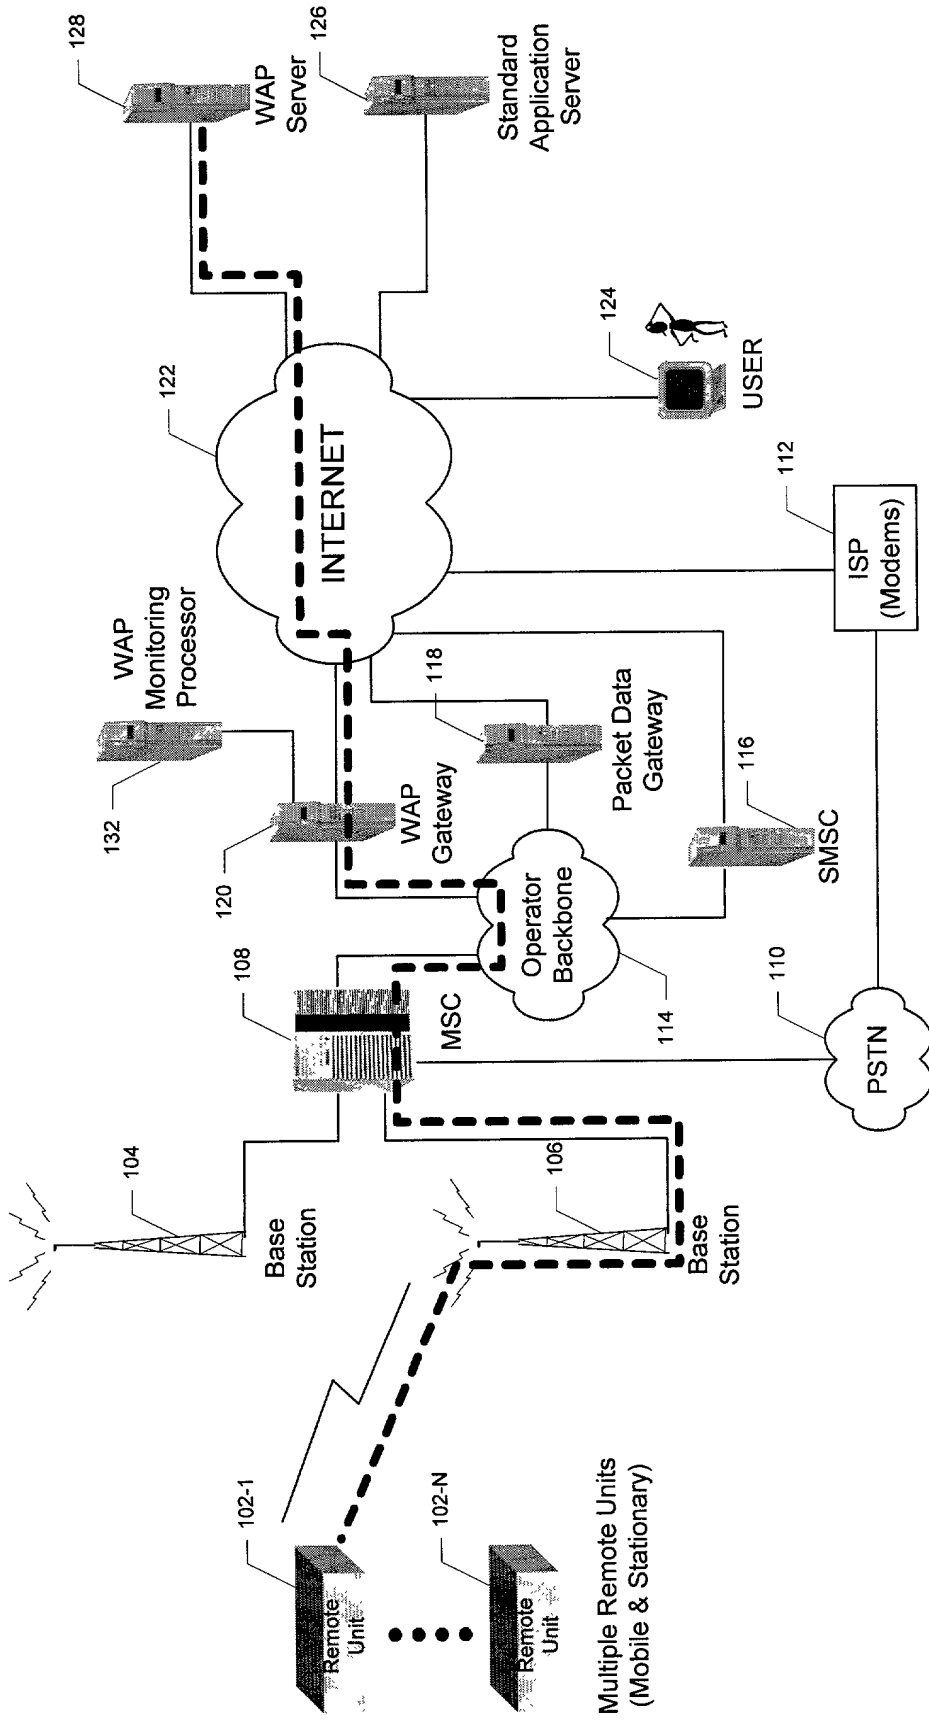


Figure 1g

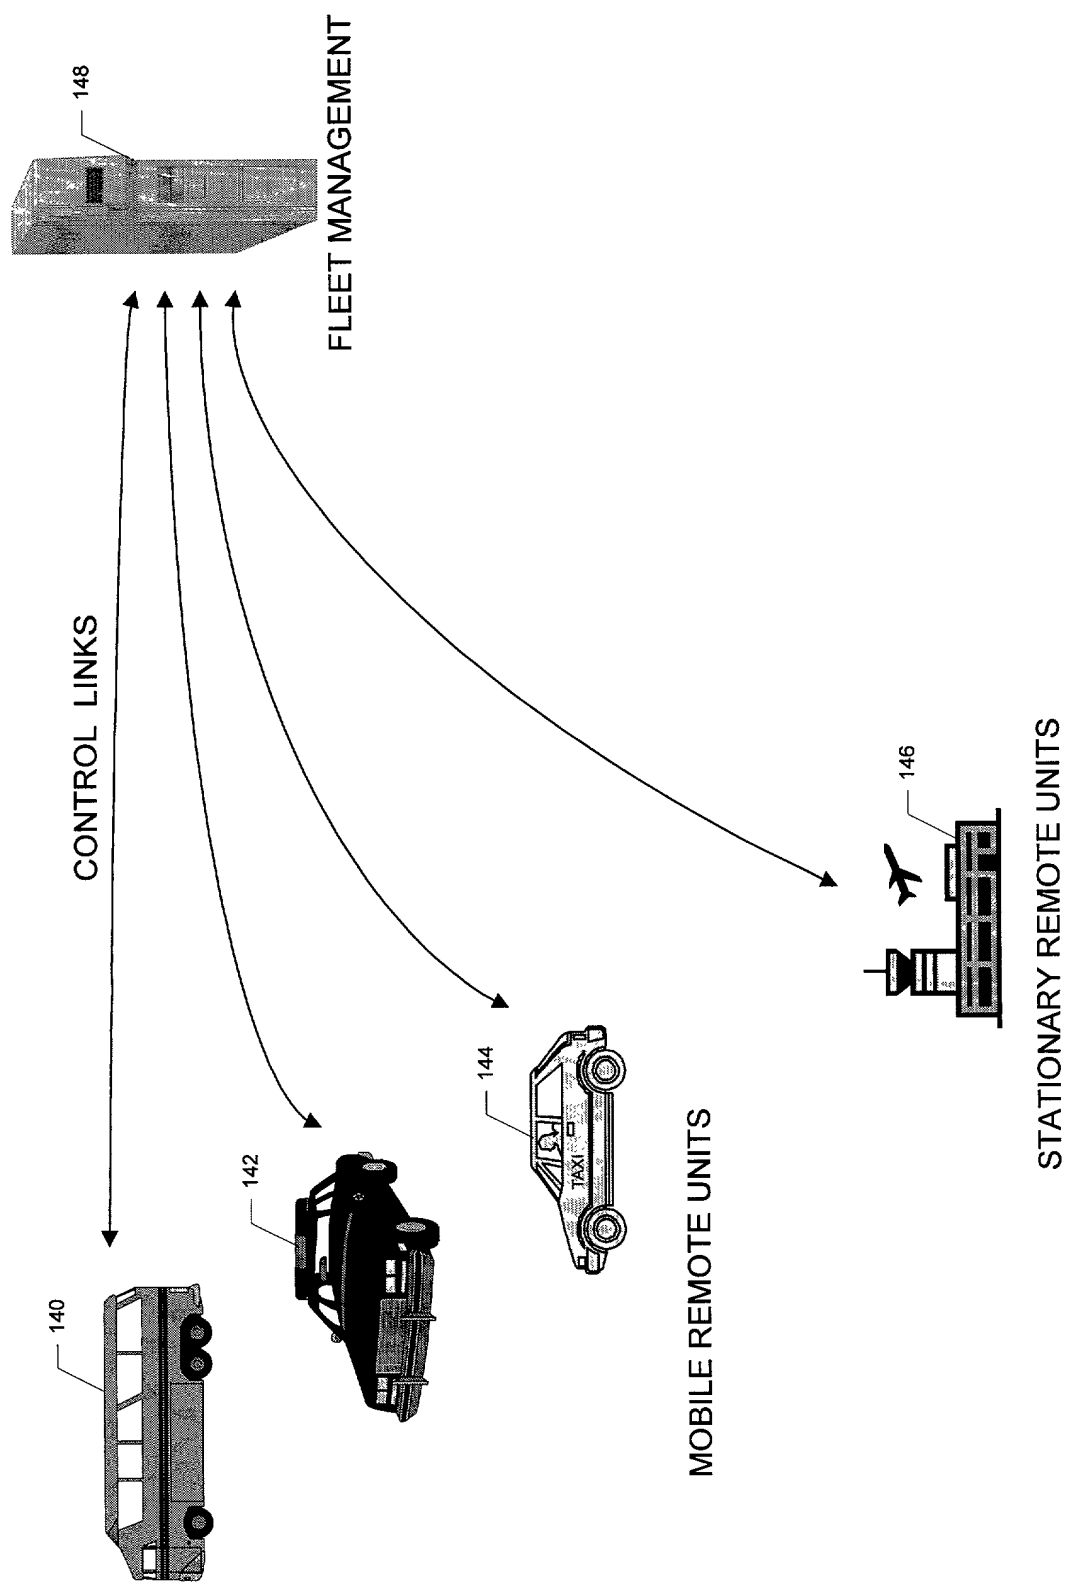


Figure 1h

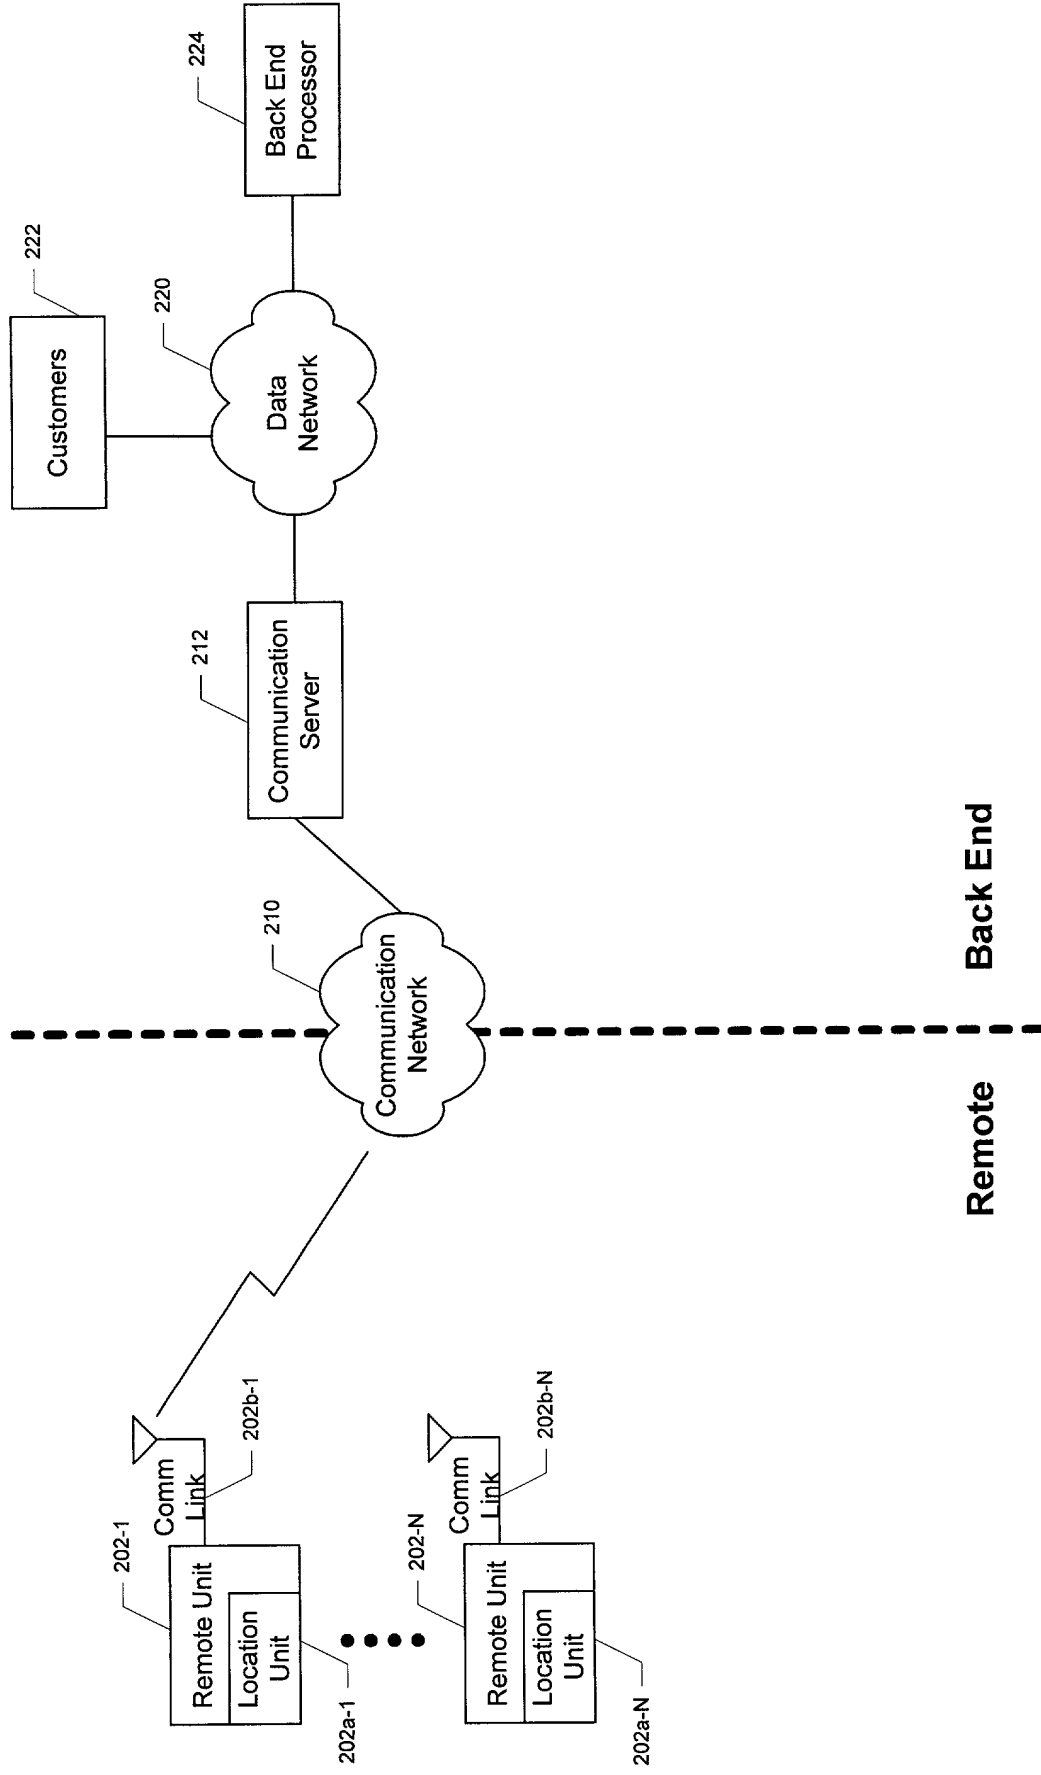


Figure 2a

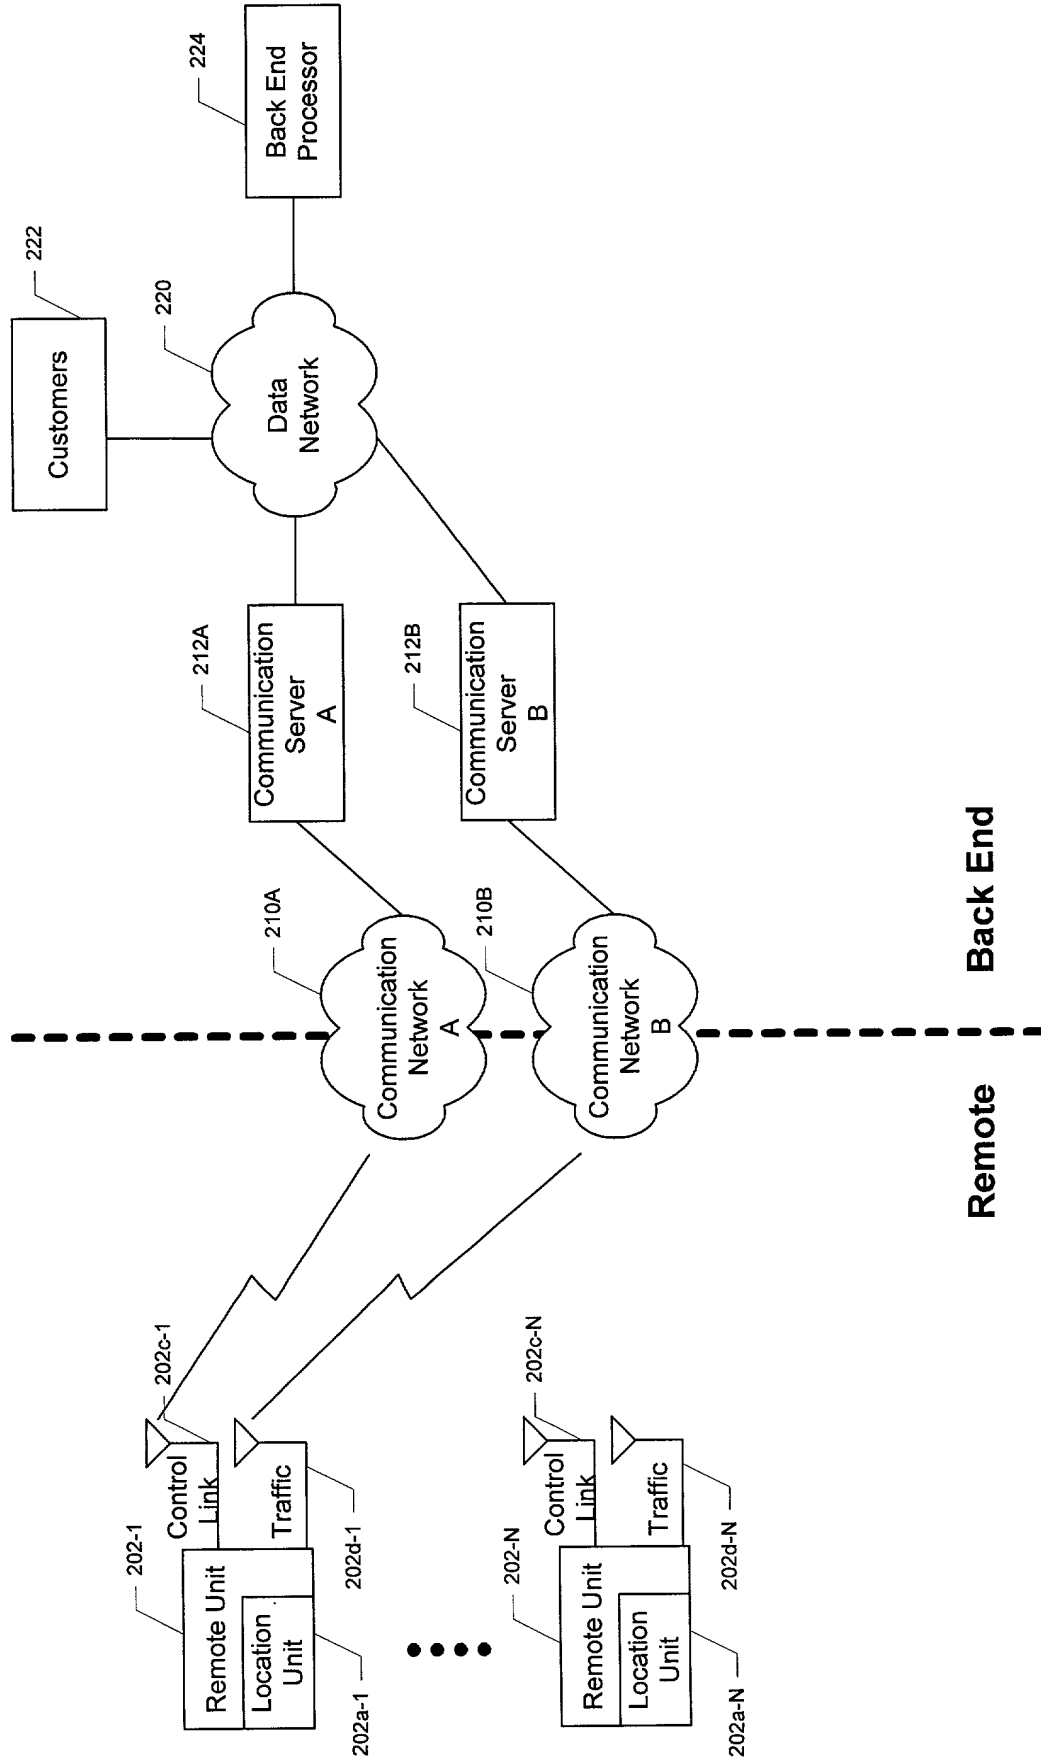


Figure 2b

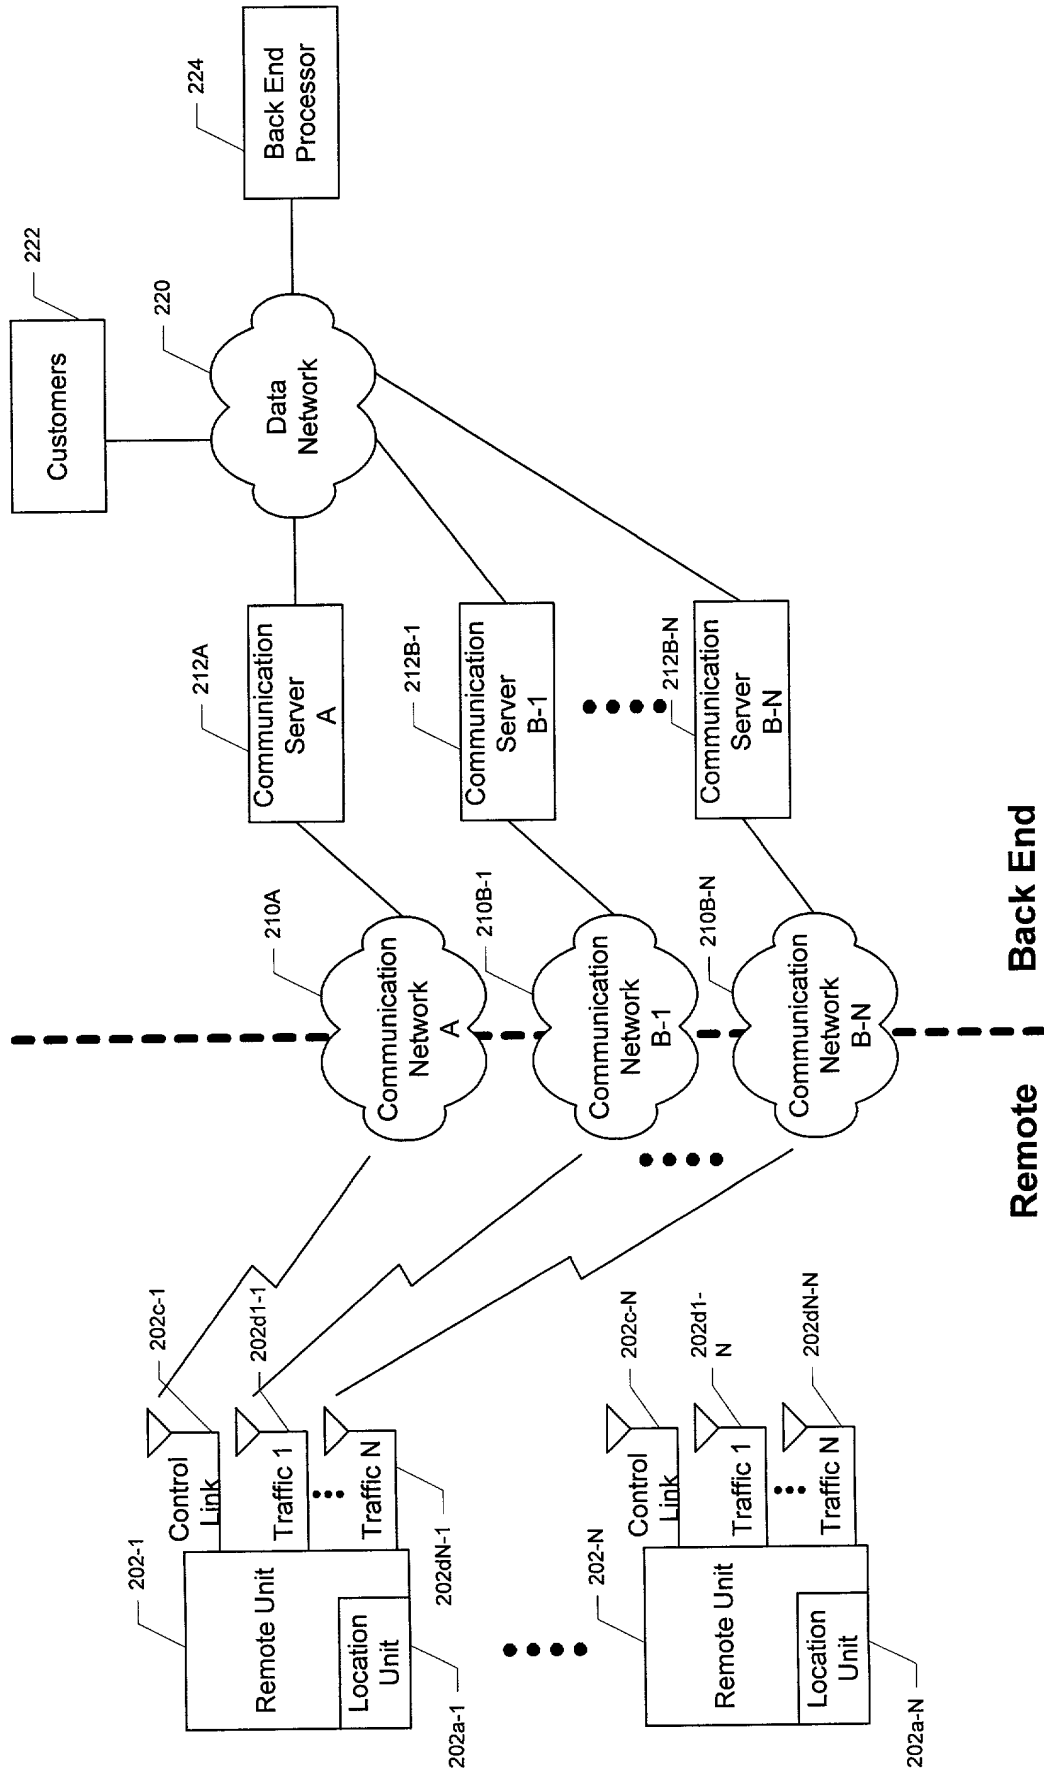


Figure 2c

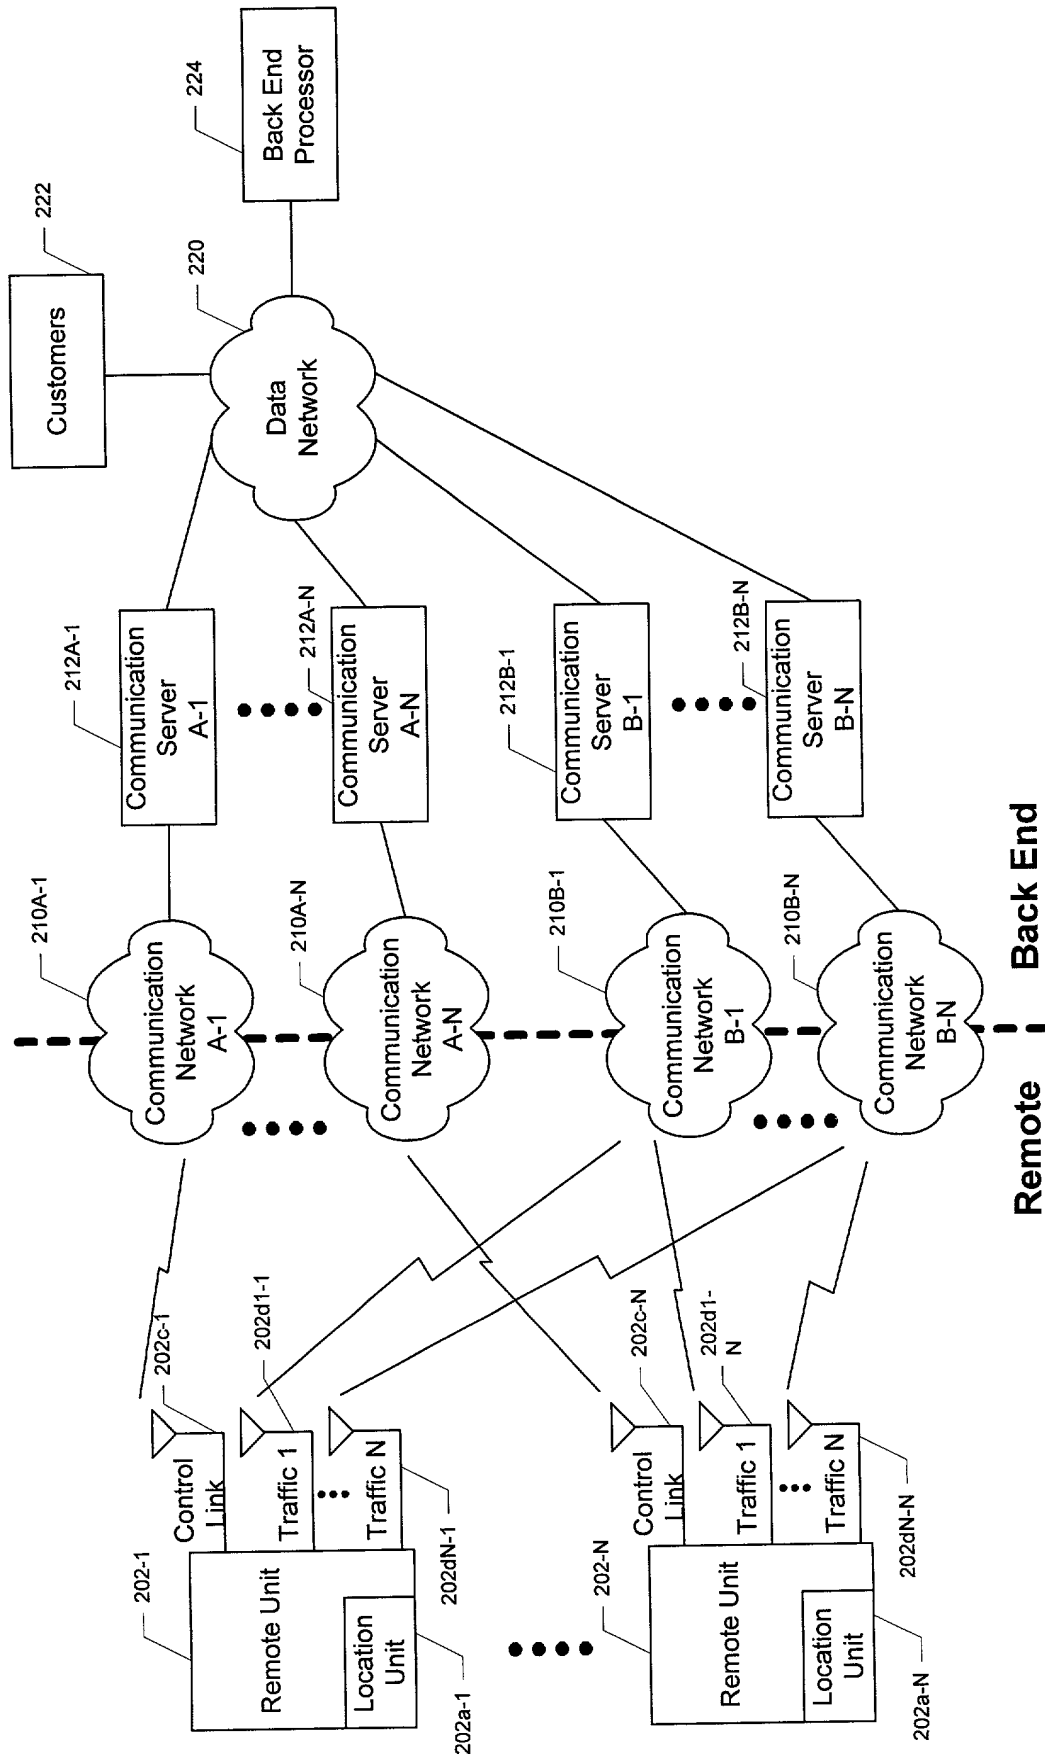


Figure 2d

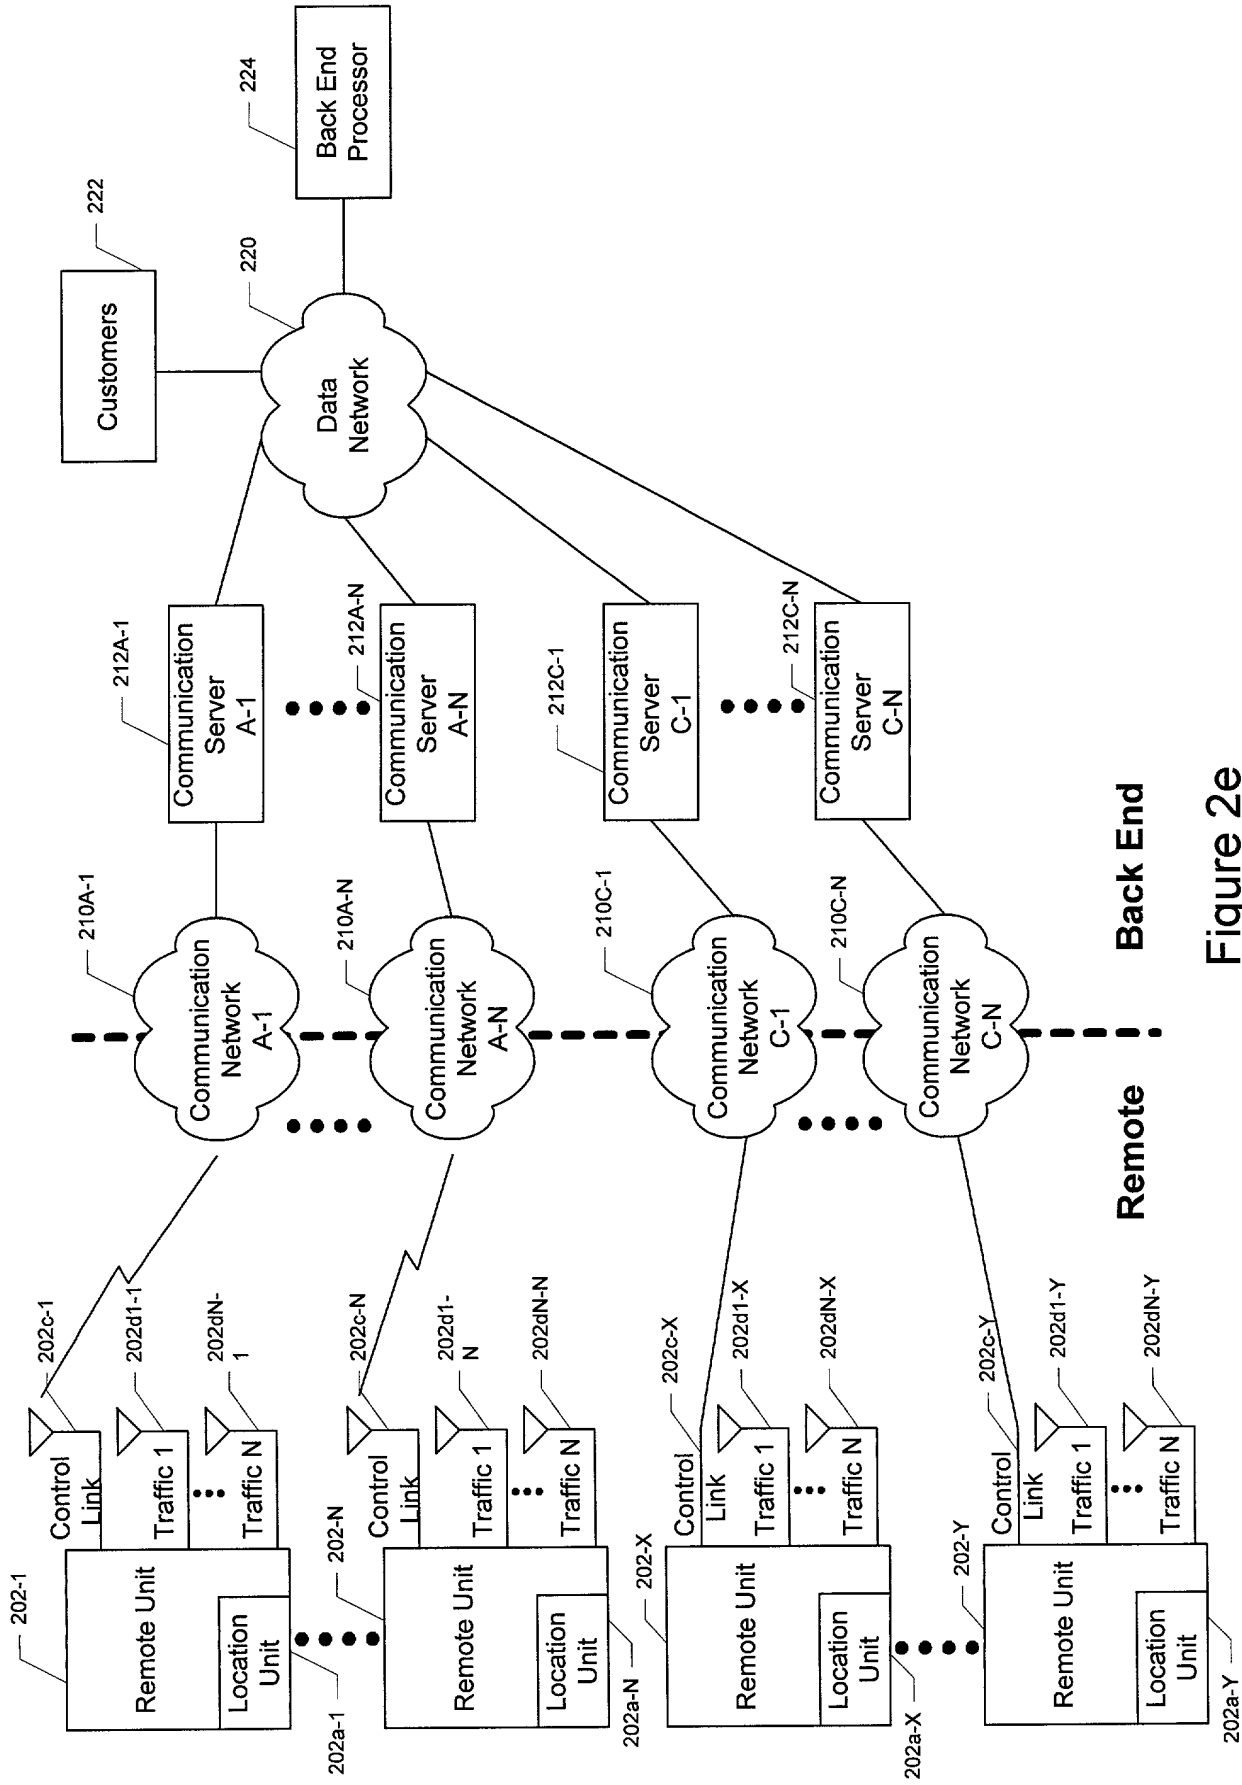


Figure 2e

300

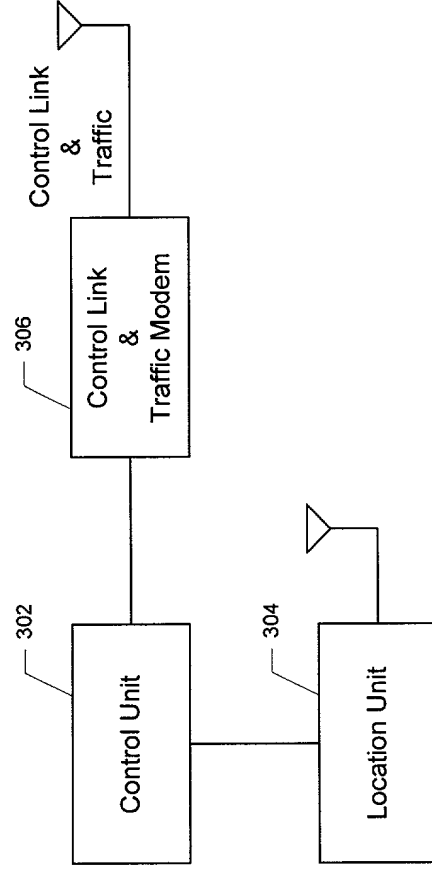


Figure 3a

300

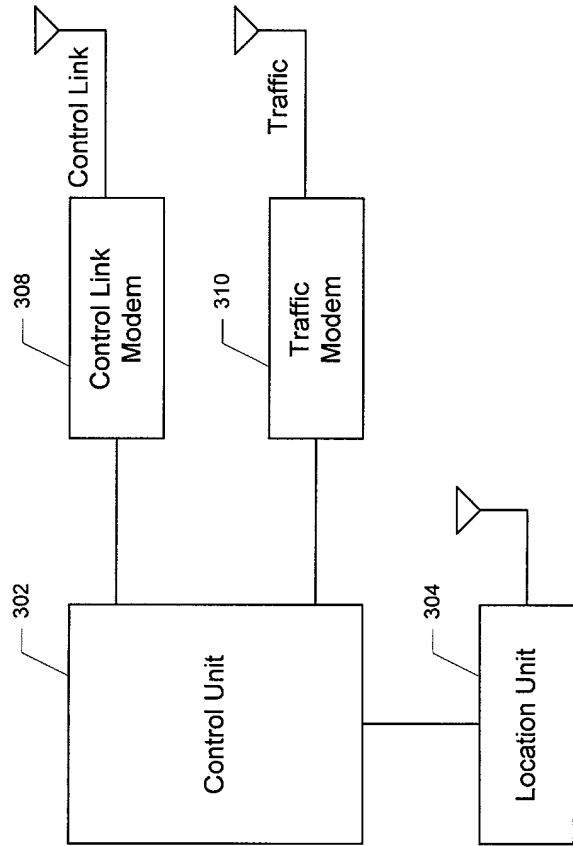


Figure 3b

300

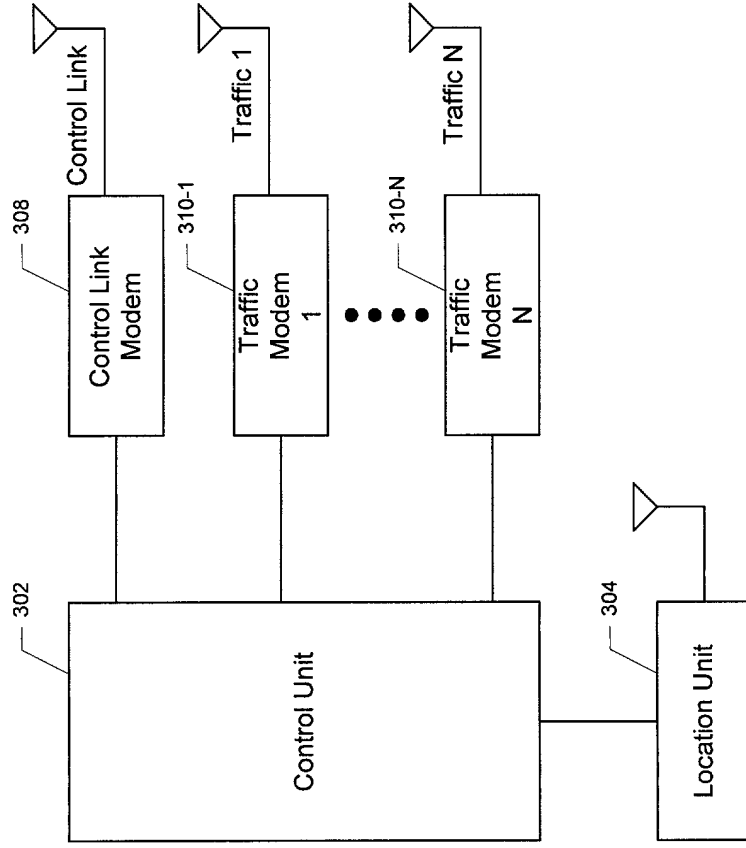


Figure 3c

300

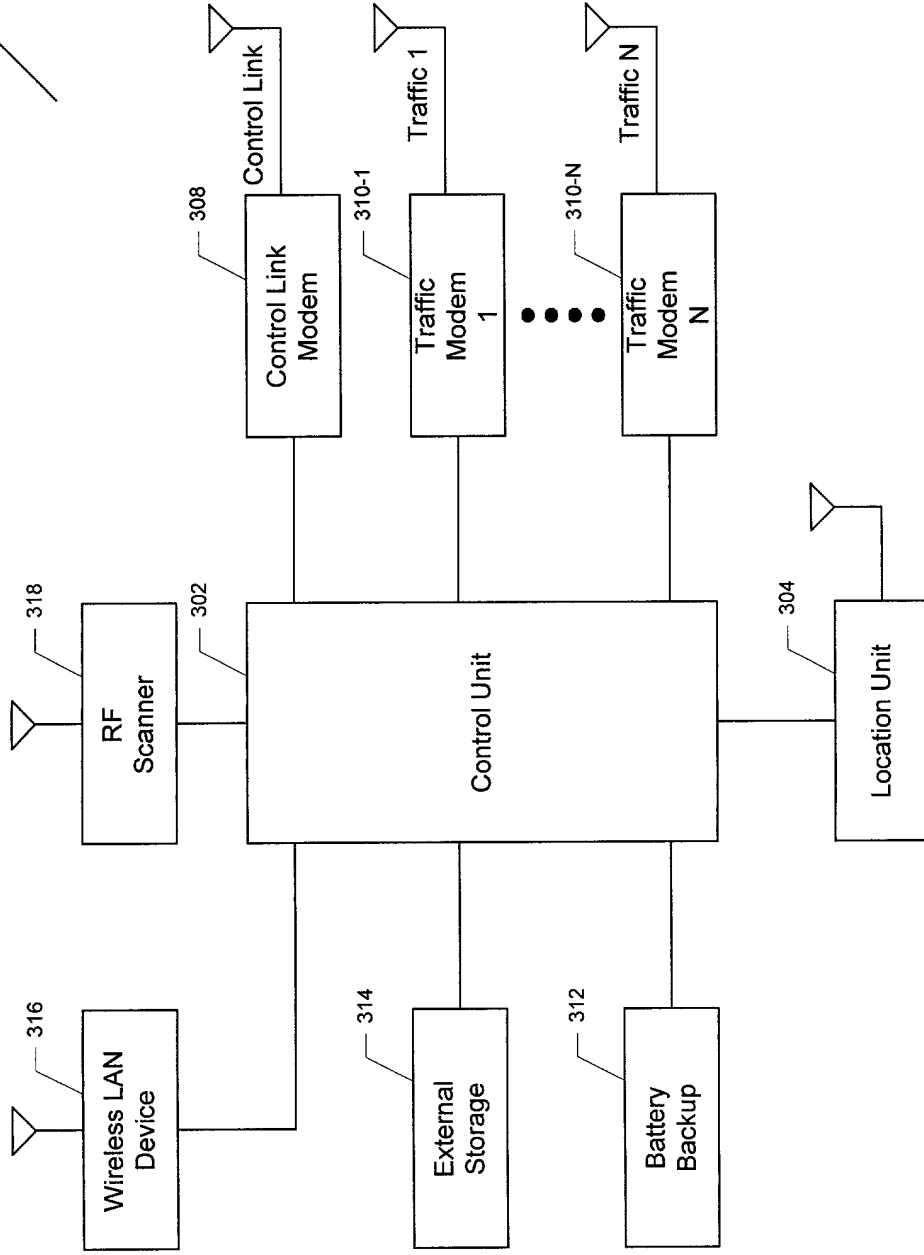


Figure 3d

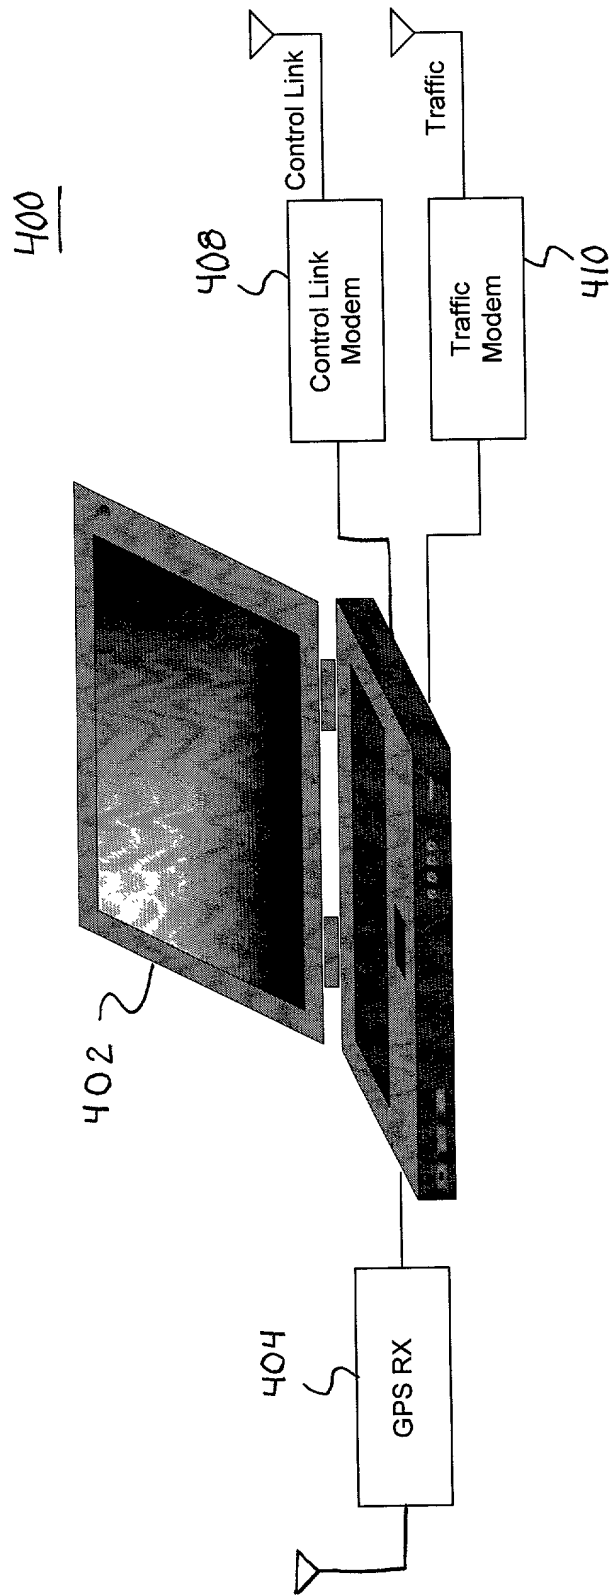


Figure 4a

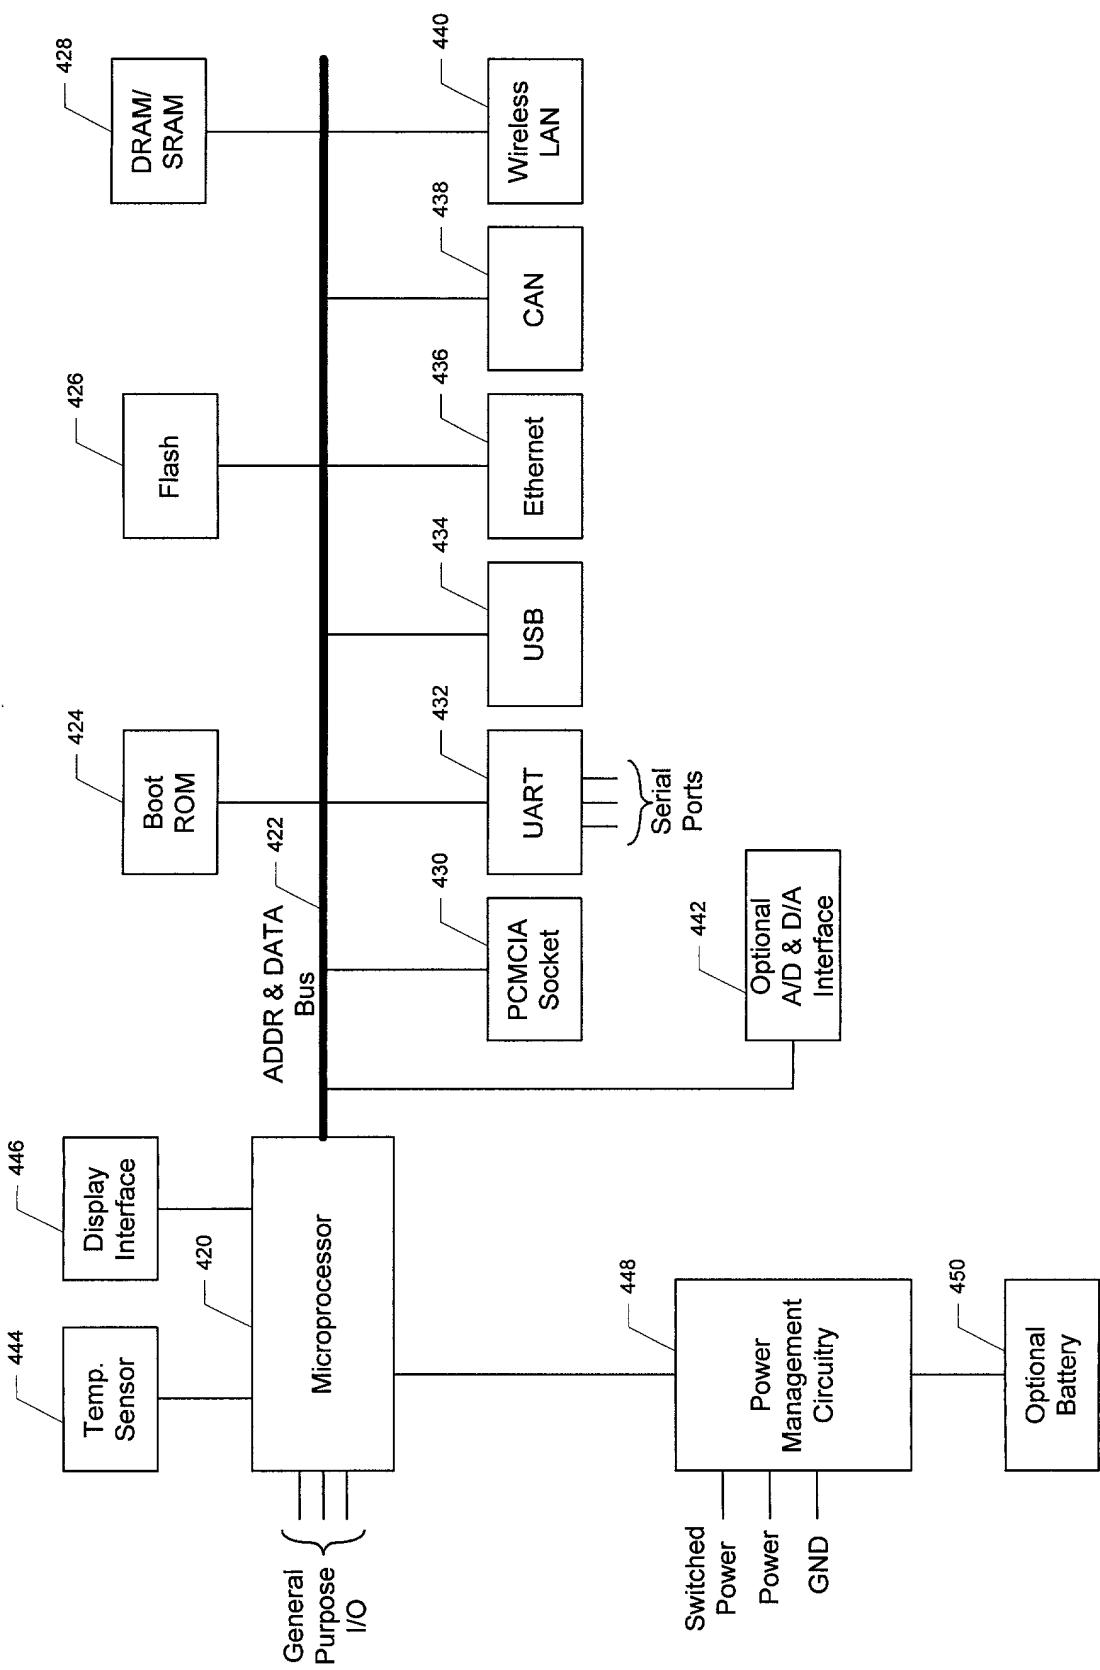


Figure 4b

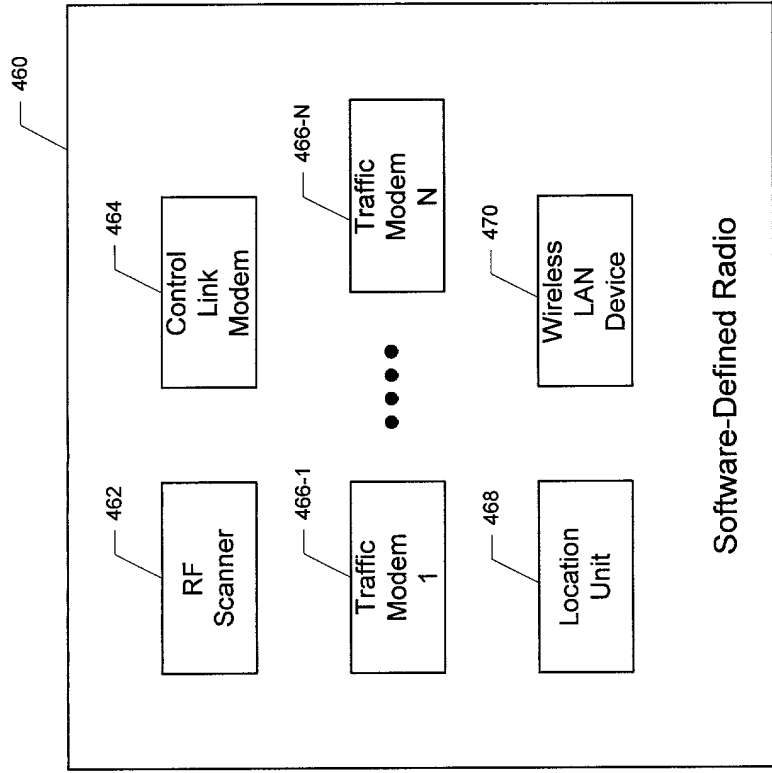


Figure 4c

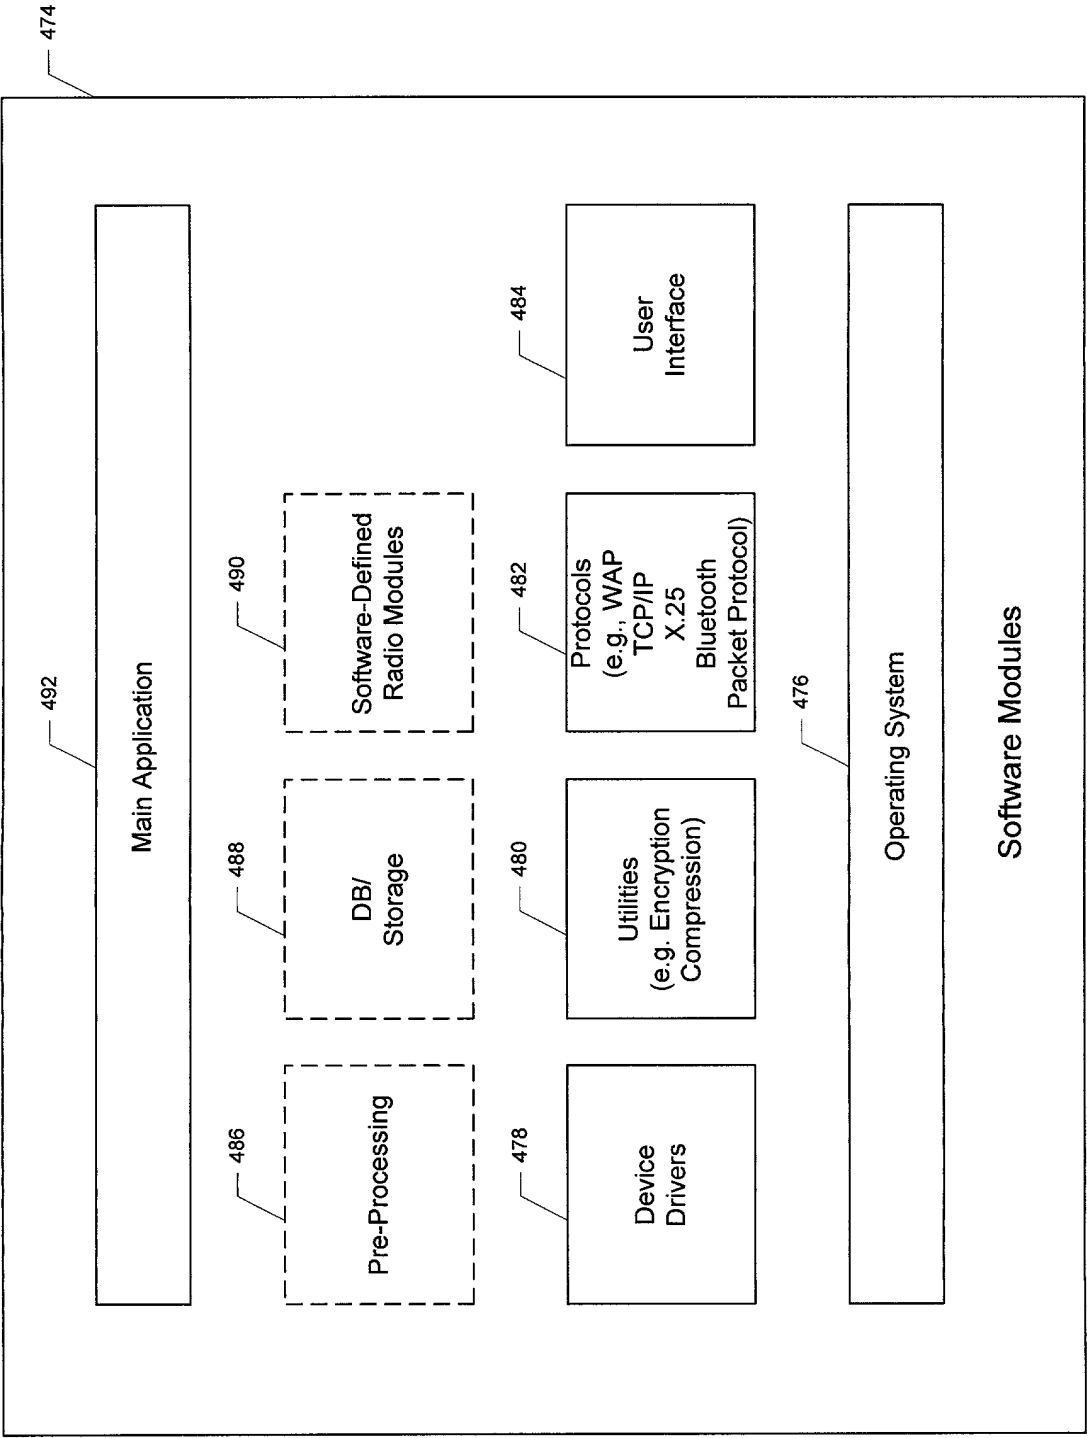


Figure 4d

FIG. 5a is a block diagram of a system 500. The system 500 includes a User Interface 508, a Fleet Management 502, a Test Traffic Generator 504, a Post Processor 506, a Data Network 516, a Portal 510, a Mapping 512, and a Billing & Accounting 514. The User Interface 508 is connected to the Fleet Management 502, the Test Traffic Generator 504, the Post Processor 506, and the Data Network 516. The Fleet Management 502 is connected to the Data Network 516. The Test Traffic Generator 504 is connected to the Data Network 516. The Post Processor 506 is connected to the Data Network 516. The Data Network 516 is connected to the Portal 510, the Mapping 512, and the Billing & Accounting 514.

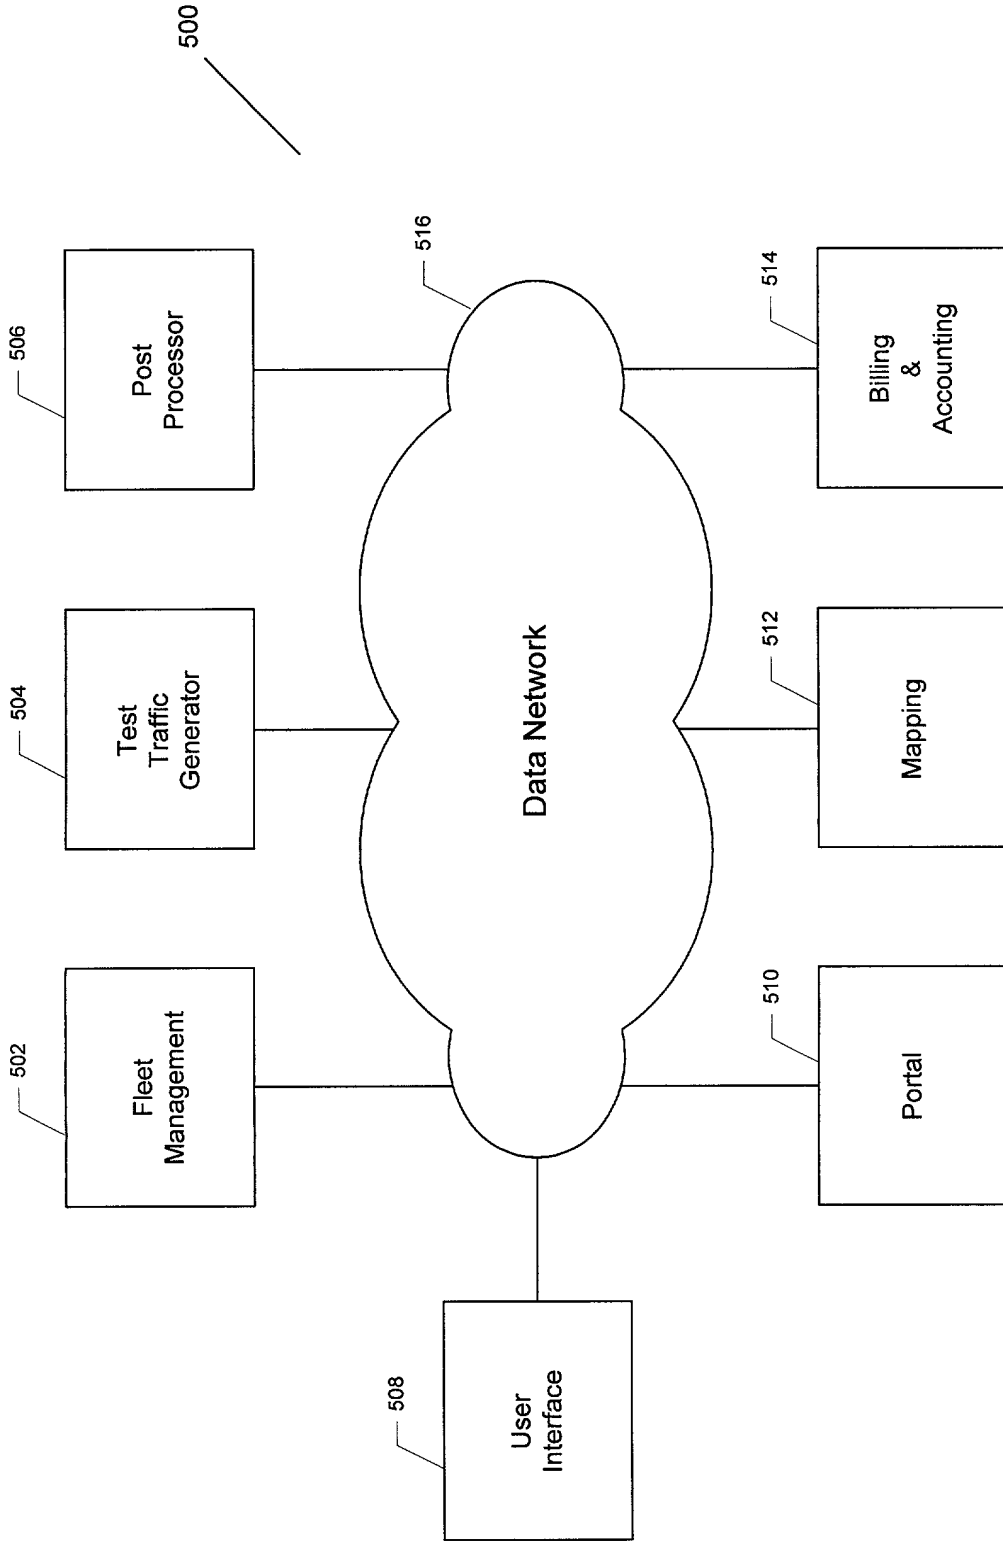


Figure 5a

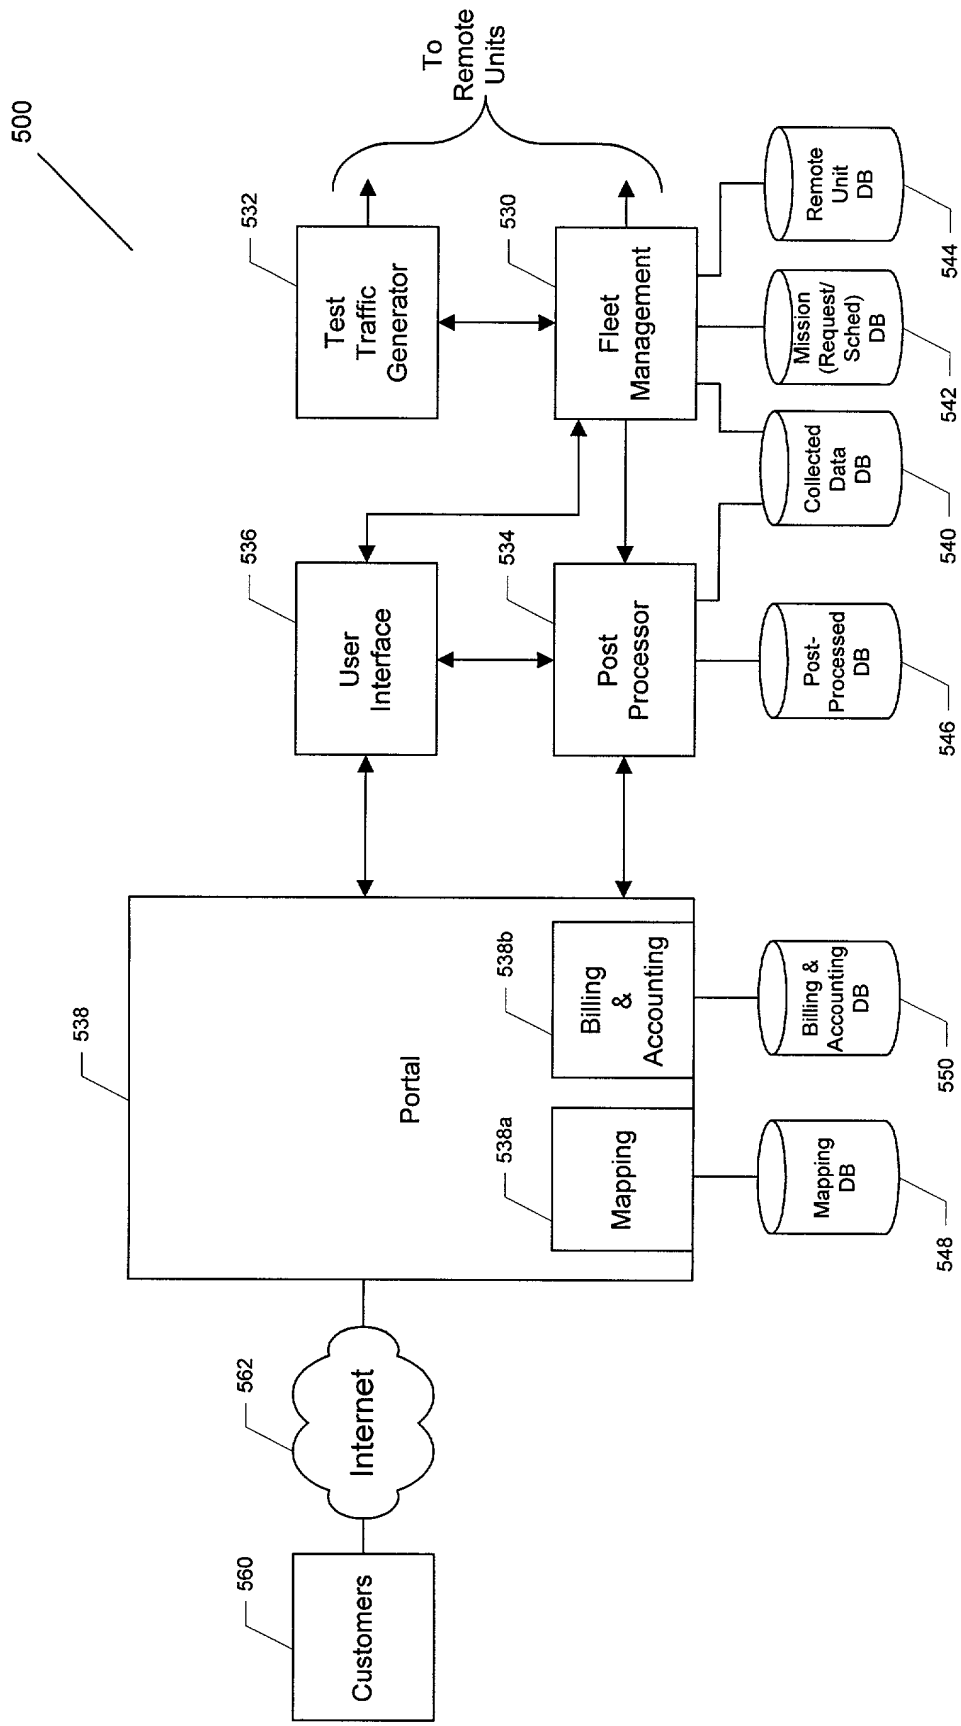


Figure 5b

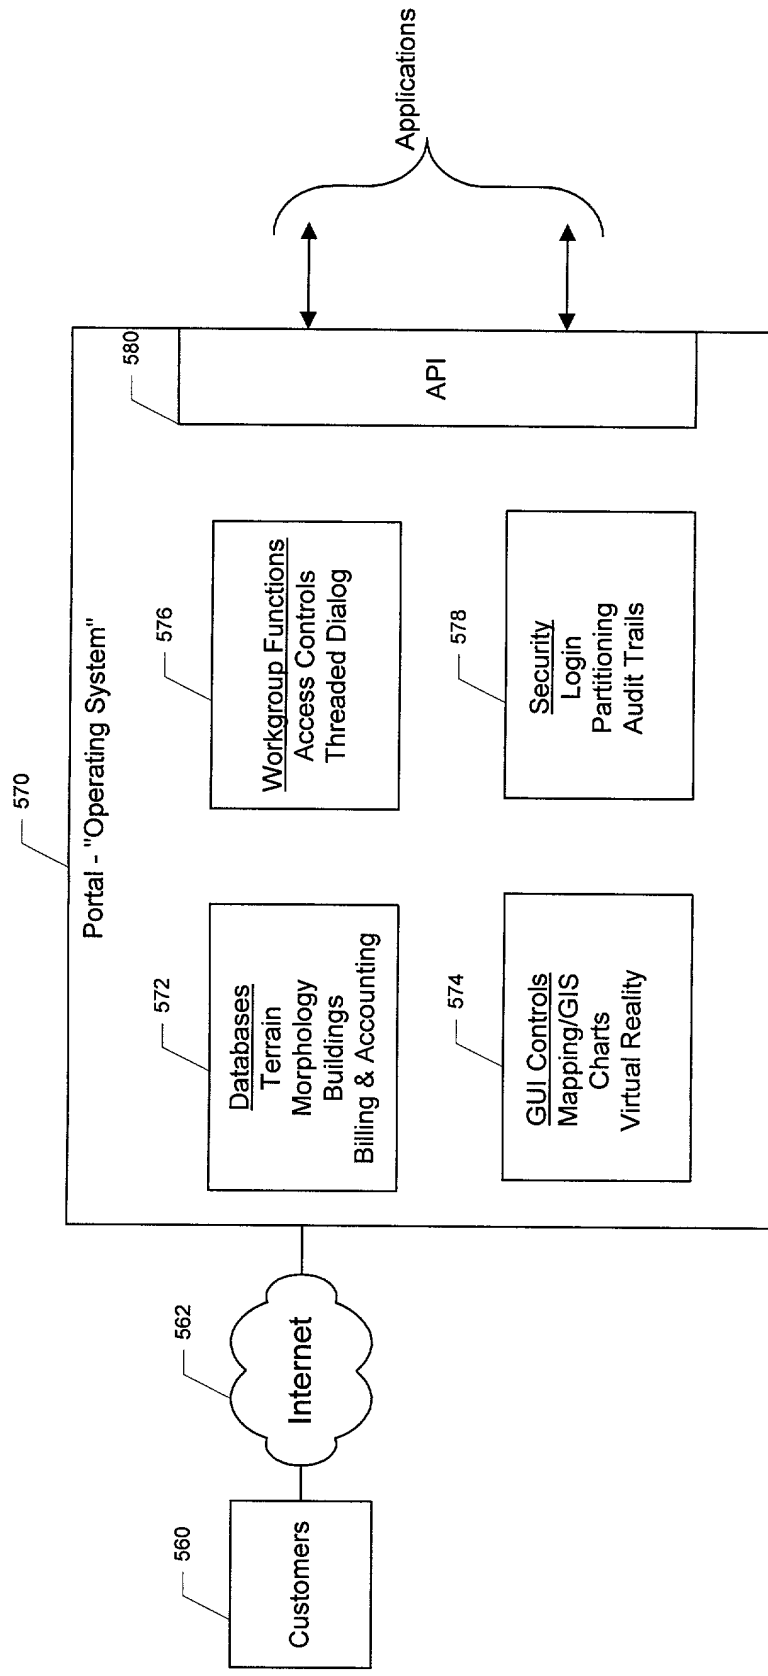


Figure 5c

Remote Unit Originated Packet

Packet Type ID	610a
Remote Unit ID	610b
Date & Time	610c
Message Number	610d
Mission ID Number	610e
Location Information	610f
Payload Information e.g., Call Statistics RF Engineering Data Layer 3 Information WAP Latency SMS Latency	610g
Checksum	610h

610

Figure 6a

Back End Processor Originated Packet

Packet Type ID	620a
Remote Unit ID	620b
Date & Time	620c
Message Number	620d
Mission ID Number	620e
Payload Information e.g., Type of Access (WAP, Ckt Switch, etc) Trigger - Time of Call (or range) Trigger - Location of Call (or range) Wireless System to test Target Phone Number or URL Mobile or Terr. Originated	620f
Checksum	620g

620

Figure 6b

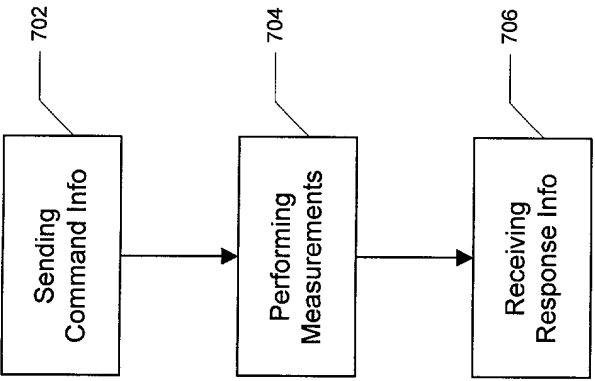


Figure 7a

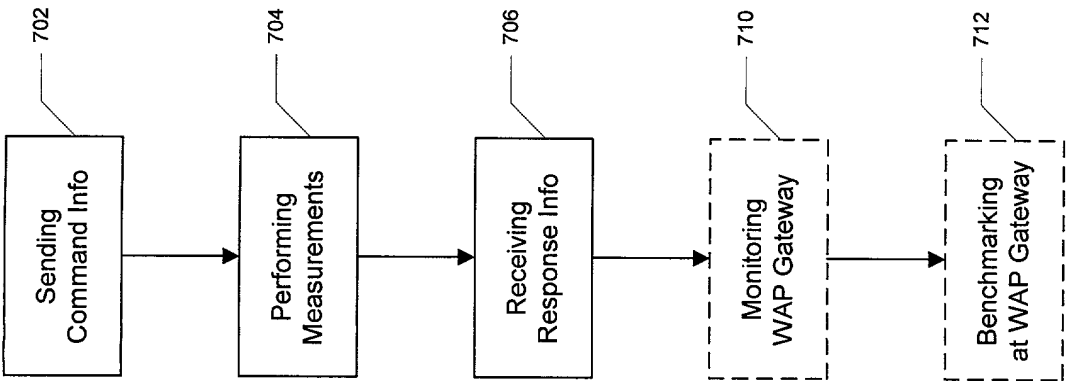


Figure 7b

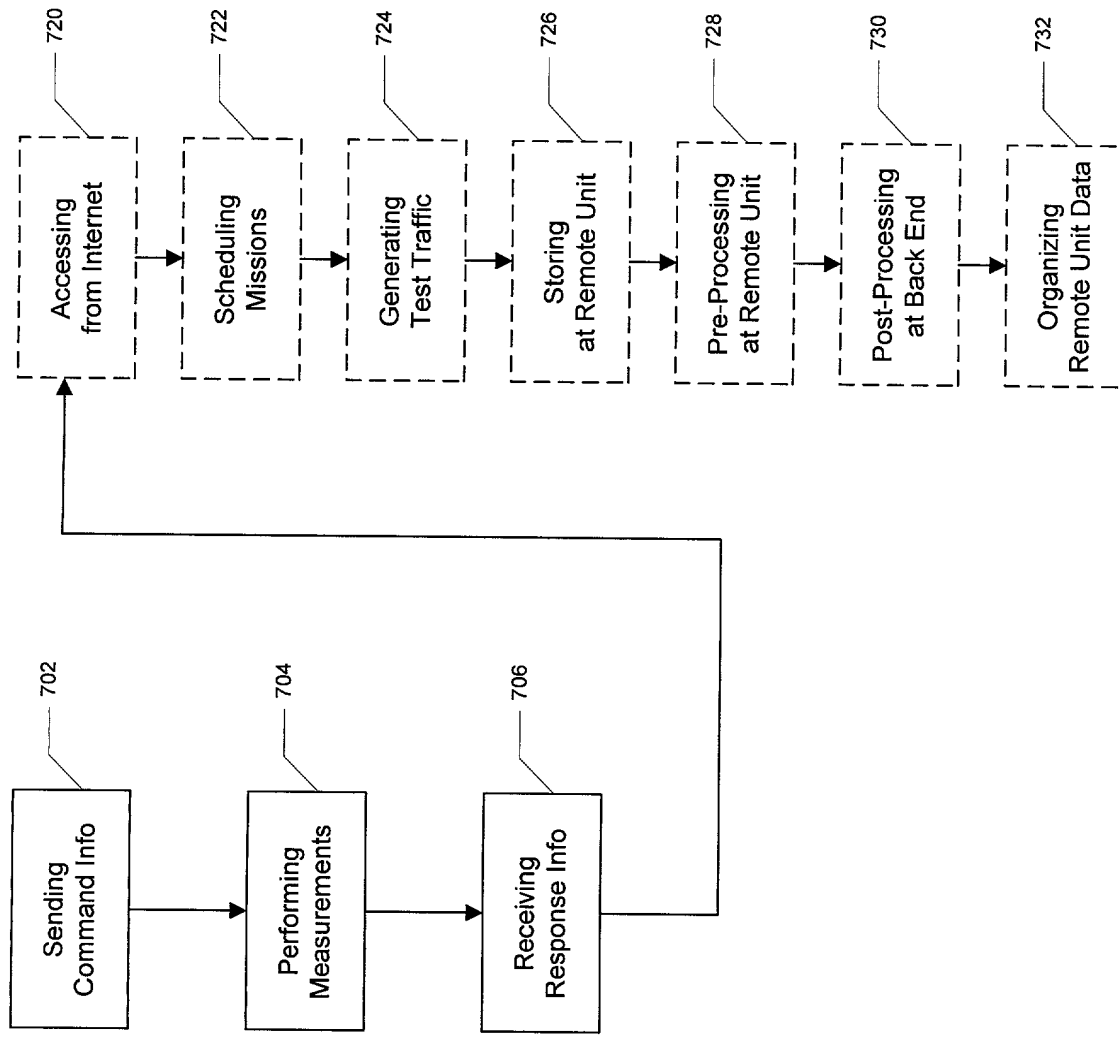


Figure 7c

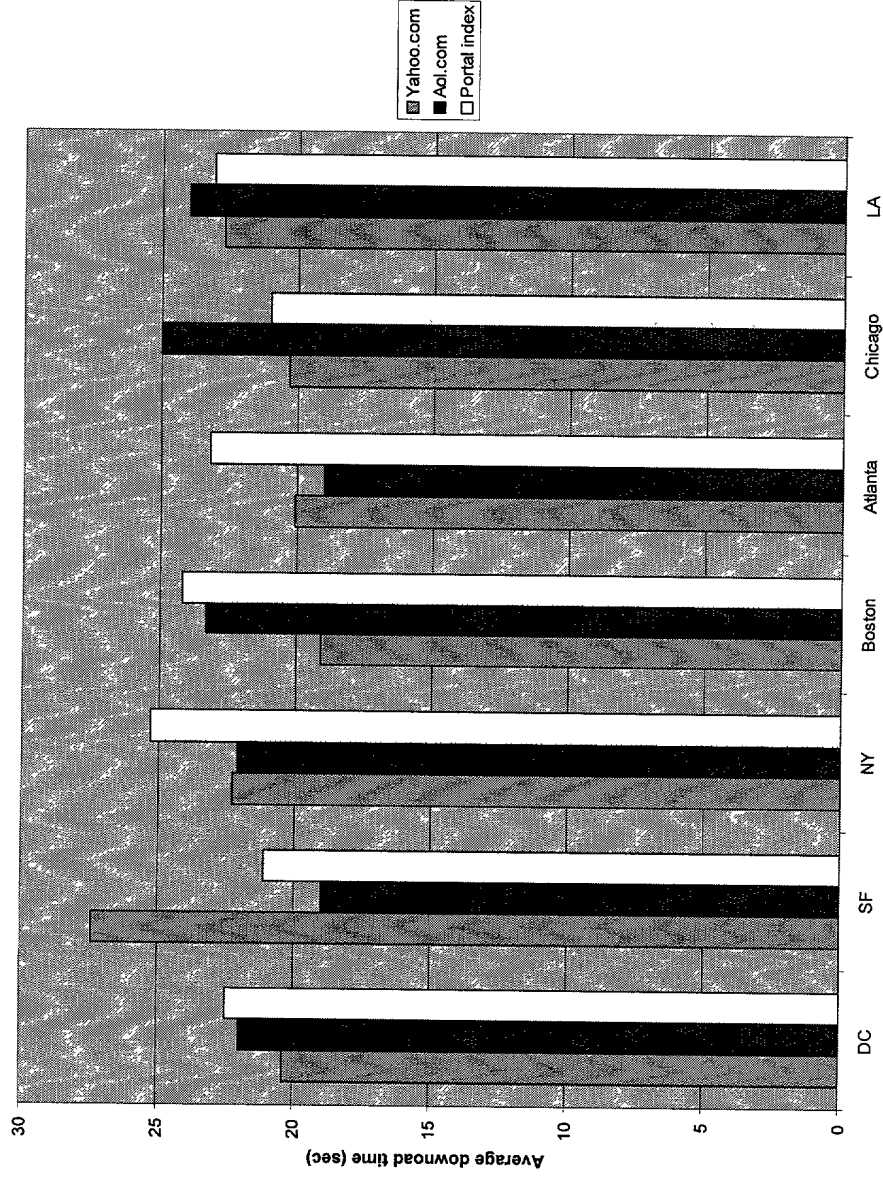


Figure 8a

URL: yahoo.com
Service: Compare Wireless Operators
Report: Download time
By: city
By: carrier
Frequency: 30 minutes
Time: 6 am - 9 pm
Period: 03/01/00 - 03/07/00



Figure 8b

URL: yahoo.com
Service: Compare Wireless
Operators
Report: Completion percent
By: city
By: carrier
Frequency: 30 minutes
Time: 6 am - 9 pm
Period: 03/01/00 - 03/07/00

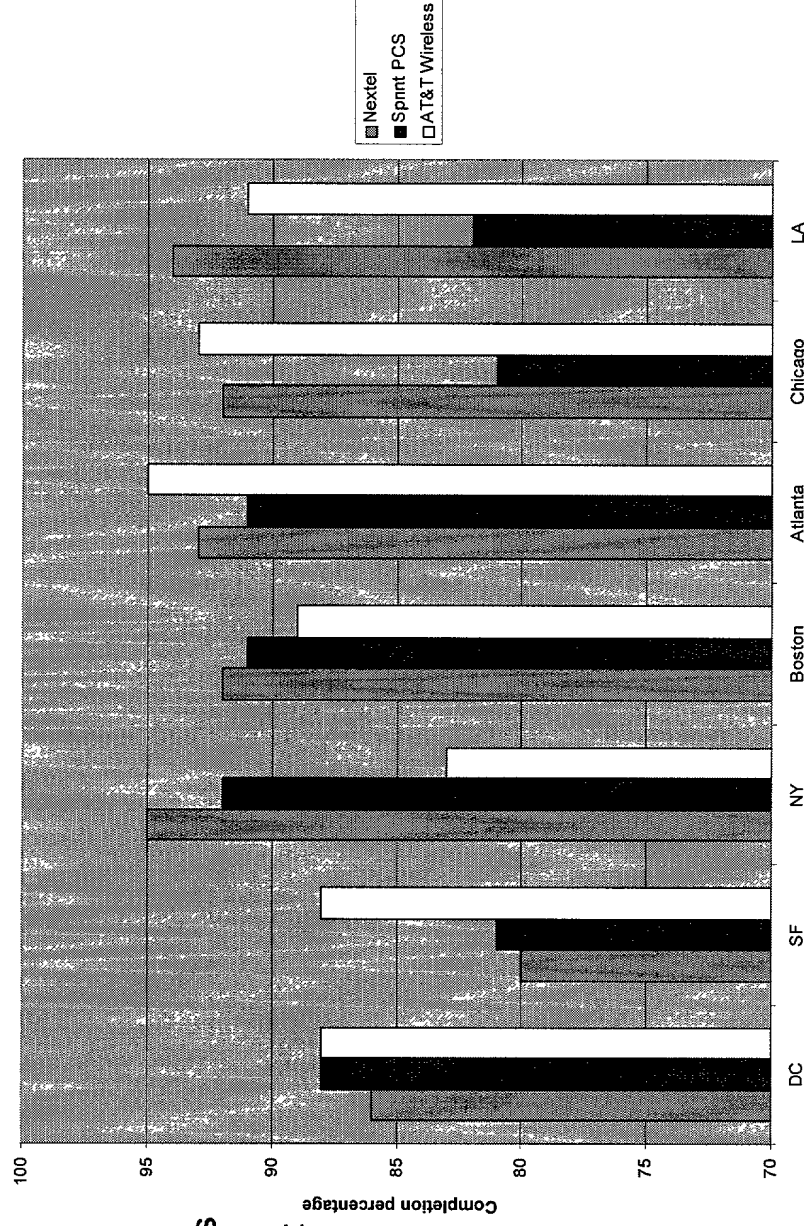


Figure 8c

URL: yahoo.com
Service: Trend Wireless
Operators
Report: Completion percent
By: city
By: carrier
Frequency: 15 minutes
Time: 6 am - 9 pm
Period: 03/01/00 - 03/07/00

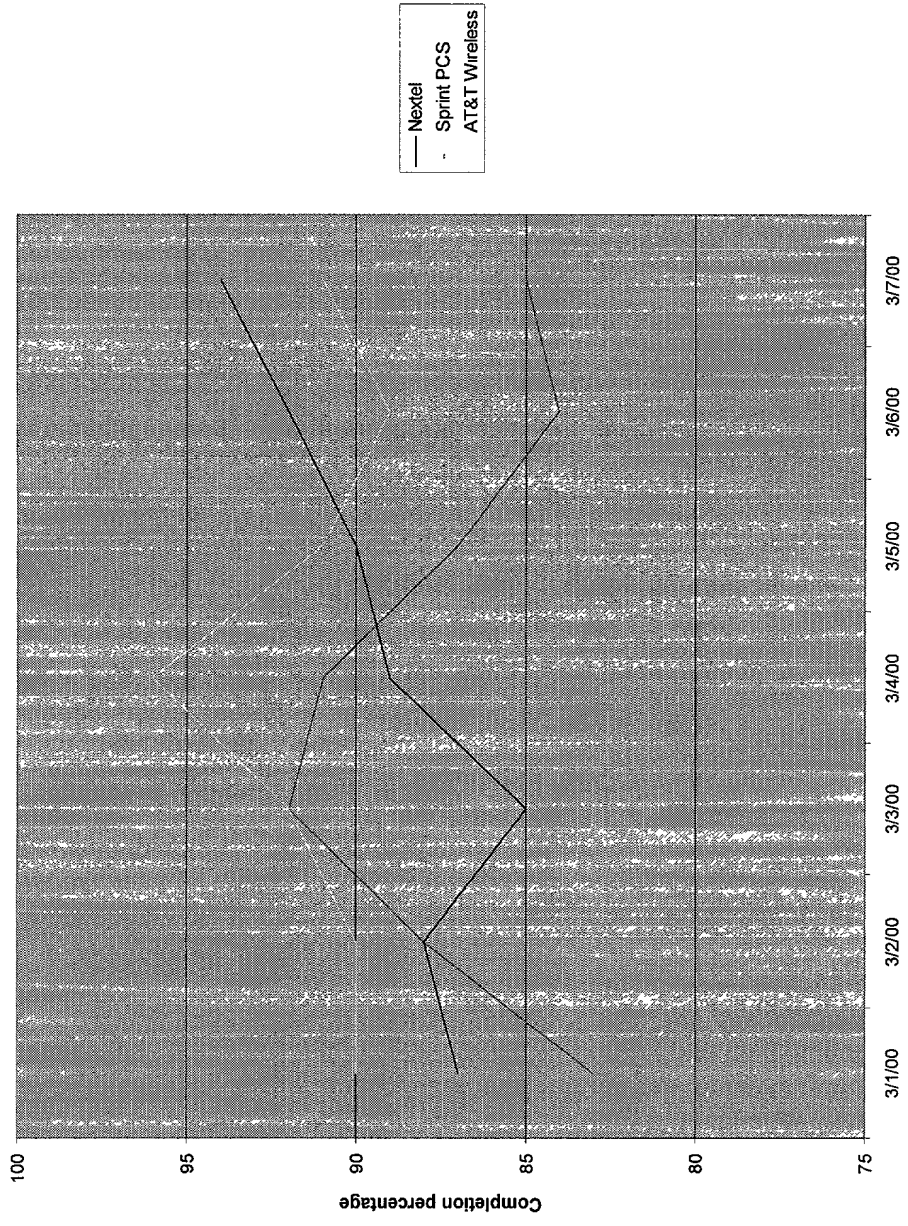


Figure 8d

URL: yahoo.com
Service: Gateway Breakdown
Report: Download time
Components 1
By: city
Carrier: Nextel
Frequency: 60 minutes
Time: 12 pm - 12 pm
Period: 03/01/00 - 03/07/00

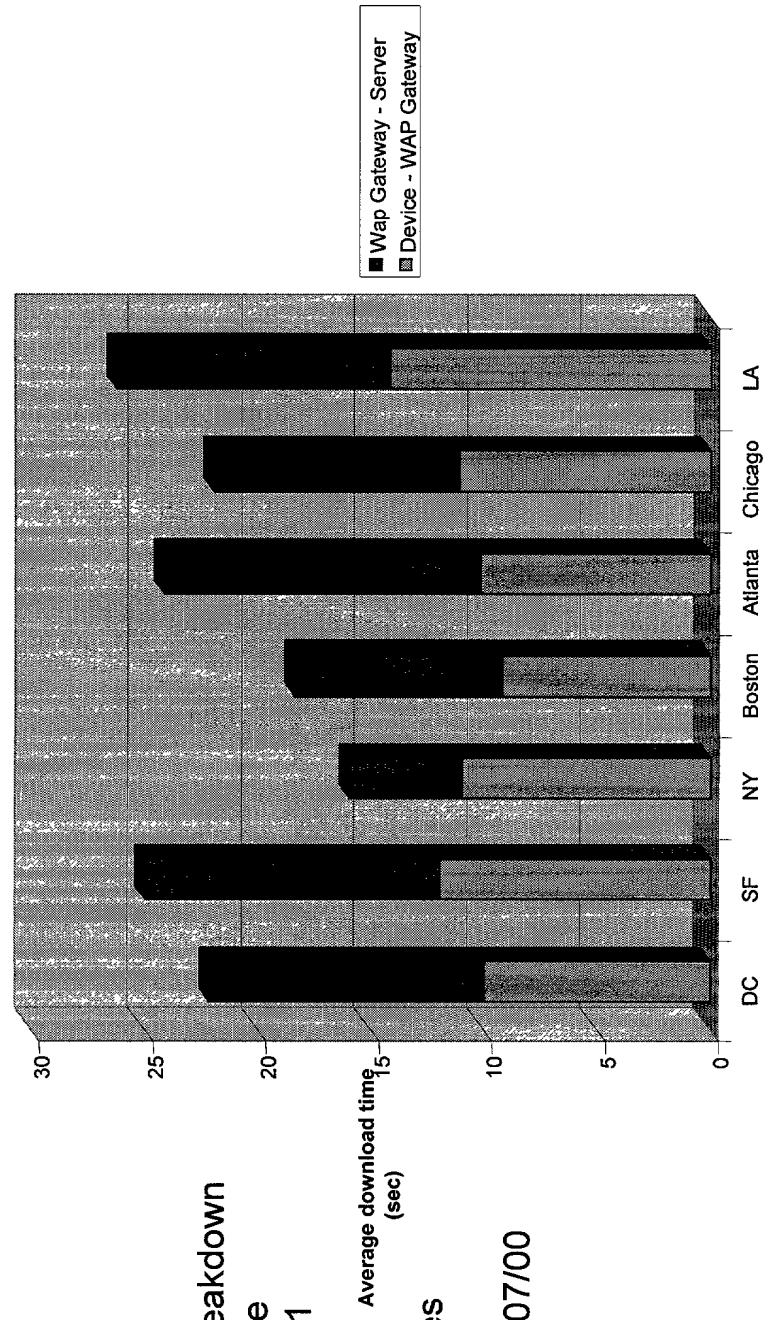


Figure 8e

URL: yahoo.com
Service: Error Stats
Report: Error report
By: all cities
Carrier: all carriers
Frequency: 60 minutes
Time: 12 pm - 12 pm
Period: 03/01/00 - 03/07/00

860

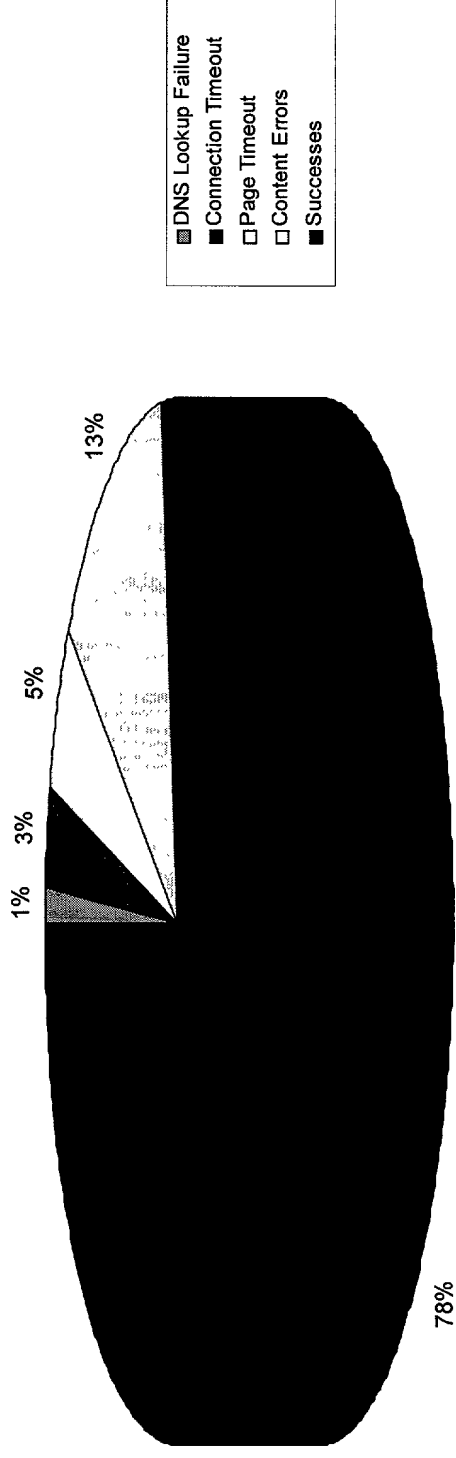


Figure 8f

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of James Xanthos, Mark McDowell, Graham Stead, Joseph Khalil, David Helinski, and Joseph Kitchell

Serial No.: Not Yet Assigned

Group Art Unit:

Filed: HEREWITH

Examiner:

FOR: METHOD AND SYSTEM FOR MEASURING DATA QUALITY OF SERVICE IN A WIRELESS NETWORK USING MULTIPLE REMOTE UNITS AND A BACK END PROCESSOR

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As below inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, joint and first inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **METHOD AND SYSTEM FOR MEASURING DATA QUALITY OF SERVICE IN A WIRELESS NETWORK USING MULTIPLE REMOTE UNITS AND A BACK END PROCESSOR**, the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).


I hereby claim the benefit under 35 U.S.C. ' 119(e) of United States provisional application no. 60/190,619, filed March 20, 2000.

I hereby appoint the following attorney(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Jon L. Roberts
Registration No. 31,293
John K. Abokhair, Esq.
Registration No. 30,537
Kevin L. Pontius
Registration No. 37,512
Christopher B. Kilner
Registration No. 45,381
Roberts Abokhair & Mardula, L.L.C.
11800 Sunrise Valley Drive
Suite 1000
Reston, Virginia 20191-5302
(703) 391-2900

I declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements are made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of inventor James Xanthos

Inventor's Signature  Date 13 APRIL 2000

Residence Laurel, MD

Post Office Address: 10673 Glen Hannah Drive

Laurel, MD 20723

Citizenship: USA

Full name of inventor Mark McDowell

Inventor's Signature  Date 04-13-00

Residence Alexandria, VA

Post Office Address: 5008 John Ticer Drive

Alexandria, VA 22304

Citizenship: USA

Full name of inventor Graham Stead


Inventor's Signature  Date 04/13/2000

Residence Arlington, VA

Post Office Address: 124 B North Bedford Street
Arlington, VA 22201

Citizenship: USA

Full name of inventor Joseph Khalil


Inventor's Signature  Date 4-13-00

Residence Alexandria, VA

Post Office Address: 3305 Wyndham Circle, Apt. 155
Alexandria, VA 22302

Citizenship: USA

Full name of inventor David Helinski


Inventor's Signature  Date 4/13/00

Residence Arlington, VA

Post Office Address: 5709 North 15th Road
Arlington, VA 22205

Citizenship: USA

Full name of inventor Joseph Kitchell

Inventor's Signature  Date 13 Apr 2000

Residence Centreville, VA

Post Office Address: 5413 Sourgum Drive
Centreville, VA 20120

Citizenship: USA